



SOUTHERN COPPER & SUPPLY COMPANY, INC.

875 YEAGER PARKWAY

PELHAM, AL 35124

800-289-2728

CMW®

RESISTANCE WELDING PRODUCTS

- ELECTRODES • HOLDERS • BAR STOCK • SEAM WELDING WHEELS • RINGS
- SPECIAL DIES • SHAFTS • BUSHINGS • CASTINGS
- FORGINGS • ELECTRODE MATERIALS

**Special electrodes, holders and dies for
resistance welding applications**

Continuously serving the resistance Welding Industry since 1929, CMW Inc. is an industry leader in the development, engineering and manufacturing of a variety of products. In addition, CMW offers a diversity of special metals for resistance welding applications. CMW's resistance welding products are engineered to provide the most effective materials commercially available to help achieve top quality welds. Experienced CMW engineers will aid you in the design and production of standard or special parts for your application to insure maximum efficiency from CMW's resistance welding products.

**CMW Inc.
70 S. Gray Street
Indianapolis, IN 46201**

**Phone: 866-634-8884
Fax: 866-239-6995
Email: cmw@cmwinc.com
Website: www.cmwinc.com**

**CMW Inc.
P.O. Box 2266
Indianapolis, IN 46206**



APPLICATION AND DATA SHEETS

CMW Copper Base Alloys	4
ELKONITE® ELKON® ANVILOY® Materials	5
Metric Conversions Inches to Millimeters	6
Taper Dimensions	7
CMW and RWMA Straight Electrode Coding	7
Holder and Electrode Application Sketches	38
Multispot Pressure Equalizing Holder Setups	60
Welding Bar and Rod Stock	68
ELKONITE® Bar Stock.....	69
GCAP® Weld and Stepper Schedule.....	71
Spot Welding Schedules for Low Carbon Steel	72
Projection Welding Schedules for Low Carbon Steel	73
Welding Schedules for Stainless Steel	74
Welding Schedules for Galvanized Low Carbon Steel	75
Recommended Electrode Materials	76
Resistance Welding Electrode Maintenance	77
Welding Electrode Evaluation Form	78
Do's and Don'ts for Resistance Welding Electrodes	79
Sketches & Notes	80

CAP ELECTRODES GCAPS® AND SHANKS

		Cap Electrodes	8, 9, 10, 11
		GCAP® Electrodes.....	9
		Cap Shanks	12, 13

STRAIGHT ELECTRODES

		Dome and Pointed Nose	14
		Flat and Offset Nose	15
		Radius, Truncated, and 30° Nose	16
		Elkon® and Elkonite® Faced Nose	16

BENT ELECTRODES

		Single and Radius Bend	17
		Double Bend	18

THREADED ELECTRODES

		30
--	--	-------	----

IRREGULAR ELECTRODES

	Crank	19, 20
	Spade	21
	Gun	22

STUD AND NUT ELECTRODES

	Chameleon/Max-Life™ Nut Electrodes	23
	Chameleon/Max-Life™ Stud Electrodes	24
	Self-Piloting Nut Electrodes	25
	Non-Piloting Nut Electrodes	26
	Stud or Pin Electrodes	28
	Cooling Jackets for Stud and Nut Electrodes	27

BACK-UP ELECTRODES

	Swivel Head	29
	Large Round Head CMW®3 and ELKONITE® Faced.....	29
	Square and Rectangular Head	29





THREADED SOCKET (OR BUTTON) ELECTRODES MALE THREADED BUTTON ELECTRODES

	50
--	-------	----











"NU-TWIST"® ELECTRODES


	50
--	-------	----

HOLDER TO ELECTRODE ADAPTERS


	Non Ejector	31
	Ejector	34
	Assembly Examples	32, 34, 36, 43
	Universal	46

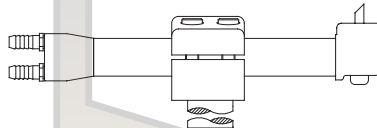ELECTRODE HOLDERS

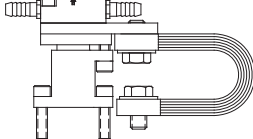	100 Series Straight Non Ejector	32, 33
	200 Series Straight Ejector	34, 35
	300 Series Premium Straight Ejector	36, 37
	400 Series Light Non-Ejector Offset	39, 40
	500 Series Heavy Duty Ejector Offset	41, 42, 43
	600 Series Universal Holders	44
	600 Series Universal Holder Components	45
	Platen Mounted Holders	61
	800 Series "Nu-Twist"® Surface and Threaded Adapters ..	48, 49
	Hydraulic Equalizing Adapters for 800 Series	52, 53, 54, 55




Dual Mounted Hydraulic "Nu-Twist"® Assemblies 56, 57

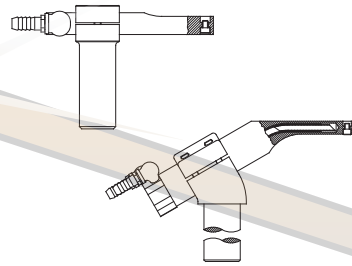


900 Series Light Universal Holders for Socket Electrodes 51

950 Series Paddle Holders for Socket Electrodes 51

LOW INERTIA HOLDERS

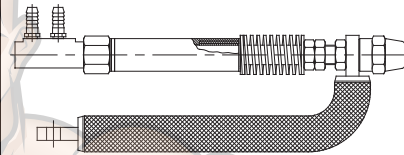


1100 Series Adjust-A-Pressure Low Inertia Holders 58, 59



1150 Series Adjust-A-Pressure Adapters 58

MULTISPOT ADAPTERS FOR AIR OR HYDRAULIC PISTONS



1200 Series Multi-Spot Adapters 62

CONTACTORS



Welder Contactors 63


ACCESSORIES



Cap Electrode Extractor Fork 65




Reamers, Hose Connectors, and Hose Clamps 64



Pneumatic Electrode Dresser and Cutters 66



Hand Electrode Dresser 67



Force Gauge 70

Long electrode life is of paramount importance to the user of resistance welding equipment. Selection of the proper CMW alloy or combination of alloys will help to give improved weld strength and electrode life.

CMW electrodes are fabricated from alloys selected from the results of laboratory and practical field tests. For special problems, CMW engineers will make recommendations based on their years of experience.

Typical Physical and Mechanical Properties of CMW® Copper Based Alloys

CMW ALLOY	Condition	Principal Elements	Class #	R.W.M.A. Alloy Number	Hardness Rockwell	Electrical Conductivity %I.A.C.S.	Ultimate Tensile Strength, psi	Elongation % in 2"	Permanent Softening Begins at	
									°C	°F
CMW® 28	Wrought**	Copper, Zirconium	1	1.15000	70 B	90	66,000	10	500	930
CMW® 3	Cast	Copper, Chromium	2	2.18200	70 B	80	50,000	20	500	930
	Wrought***				83 B	85	75,000	15	500	930
CMW® 328	Wrought***	Copper, Chromium, Zirconium	2	2.18150	83 B	85	75,000	15	500	930
CMW® 353	Wrought	Copper, Nickel, Silicon, Chromium	3	3.18000	94 B	48	100,000	13	455	850
	Cast				90 B	48	85,000	10	455	850
CMW® 100	Wrought	Copper, Nickel, Beryllium	3	3.17510	100 B	48	110,000	10	455	850
CMW® 73	Cast	Copper, Beryllium	4	4.17200	38 C	20	110,000	2	375	710
	Wrought				38 C	23	170,000	4	375	710
ELKALOY® D	Cast	Copper, Aluminum	5	5.95300	92 B	13	85,000	15	620	1150
Copper	Cast	Pure Copper	—	—	30 B	95	25,000	50	200	390
	Wrought				40 B	100	40,000	35	200	390
ELKALOY®20	Wrought	Copper, Al ₂ O ₃	20	—	75 B	85	54,000	25	800	1475

Note: All properties shown are TYPICAL and should not be used for specifications

** Cold drawn bars up to 5/8" diameter

*** Heat treated and cold drawn bars up to 1" diameter

TYPICAL USAGE

CMW® 28 material is recommended for spot welding of coated steels and high conductivity materials, excluding copper and silver.

CMW® 3 material is recommended for spot and seam welding cold and hot-rolled steels and coated materials as well as current carrying shafts and arms, back-up bars for both resistance and arc welding and electrical current carrying structural parts and springs.

CMW® 328 material is recommended for spot and seam welding cold and hot rolled steels. There is some evidence that CMW® 328 outperforms CMW® 3 material when welding coated or galvanized steels.

CMW® 353 material is recommended for heavy duty offset holders, back-up bars, flash welding dies, current carrying structural members, shafts and bushings in combination with CMW® 3.

CMW® 100 material is recommended for spot and seam welding stainless steel and high temperature heat resisting alloys requiring high weld forces, flash welding dies, back-up bars, projection welding electrodes, and high strength, high conductivity electrical components and springs.

CMW® 73 material is recommended for flash welding dies, springs, electrical components, high strength backing material for brazed assemblies and wire guides.

ELKALOY® D material is recommended for butt and flash welding dies and clamps for cold rolled and stainless steel, current carrying structural parts, jigs and fixtures, pickling racks and baskets.

ELKALOY® 20 material has exceptional resistance to deformation when welding, and is highly recommended for welding caps for welding coated and galvanized steels. It allows a stable start-up, and generally outlasts other cap materials when welding parameters are not carefully controlled. The material requires upset cold work to develop its properties, and is therefore only available as caps or cap blanks.

ELKONITE[®] is the registered trade mark of CMW used to identify a group of metal compositions whose elements consist basically of the refractory metals tungsten, molybdenum and tungsten carbide combined with copper. Combinations of these elements produce dense, hard metals of superior wear resistance and strength at elevated temperatures, coupled with good thermal and electrical conductivity. The mechanical and physical properties of the ELKONITE[®] materials make them particularly suitable as the die inserts and facings for volume projection welding,

flash and butt welding, electrical upsetting, electroforging and mash welding applications.

ELKONITE[®] material is also used successfully as facing on spot welding electrodes where heat balance or mechanical wear resistance are required. The initial premium cost of ELKONITE[®] material is offset by lower production cost per weld due to long die life and less electrode dressing time. The high stability of ELKONITE[®] material insures uniform heating and prevents misalignment, resulting in a higher quality weld.

Typical Physical and Mechanical Properties of CMW[®] Refractory Based Materials

CMW GRADE	Type of Material	Class #	R.W.M.A. Group B Material	Hardness Rockwell	Electrical Conductivity %I.A.C.S.	Ultimate Tensile Strength, psi	Cross Breaking Strength psi
ELKONITE [®] 1W3	Tungsten-Copper	10	10.74450	77 B	53	63,000	110,000
ELKONITE [®] 3W3	Tungsten-Copper		—	90 B	50	75,000	130,000
ELKONITE [®] 5W3	Tungsten-Copper		—	95 B	48	85,000	140,000
ELKONITE [®] 10W3	Tungsten-Copper	11	11.74400	98 B	45	90,000	150,000
ELKONITE [®] 30W3	Tungsten-Copper	12	12.74350	103 B	41	98,000	170,000
ELKONITE [®] 3W53	Tungsten-Copper Alloy		—	105 B	30	120,000	180,000
ELKONITE [®] 10W53*	Tungsten-Copper Alloy		—	109 B	28	160,000	200,000
ELKONITE [®] TC5	Tungsten Carbide-Copper		—	94 B	45	70,000	140,000
ELKONITE [®] TC10	Tungsten Carbide-Copper		—	100 B	42	75,000	160,000
ELKONITE [®] TC20	Tungsten Carbide-Copper		—	37 C	30	85,000	180,000
ELKONITE [®] TC53*	Tungsten Carbide-Copper Alloy		—	47 C	18	150,000	220,000
ELKON [®] 100W	Tungsten	13	13.74300	39 C	30	150,000	200,000
ELKON [®] 100M	Molybdenum	14	14.42300	90 B	30	80,000	120,000
ANVILOY [®] 1150**	Tungsten-Nickel-Iron-Molybdenum		—	34 C	13	140,000	280,000

Note: All properties shown are TYPICAL and should not be used for specifications
* Properties are in fully heat treated condition
** Hardness is 56 HRA at 1475 °F (800°C)

TYPICAL USES

ELKONITE[®] 1W3 and **3W3** alloys are generally used for flash and butt welding die inserts where higher electrical and thermal conductivity is necessary and where a degree of malleability is desirable. These materials are also used for spot welding (as a radius faced electrode) low conductivity ferrous metals such as stainless steel.

ELKONITE[®] 5W3 and **TC5** alloys are normally used for light duty projection welding dies where welding pressures are not extreme.

ELKONITE[®] 10W3 alloy is used for electrode and die inserts in most flash and butt welding dies and for projection welding dies where welding pressures are moderate. It is also used for light electrical upsetting, electroforging dies and seam welder bushing inserts.

ELKONITE[®] 30W3 and **TC10** alloys are recommended for volume projection welding dies where the pressures involved are relatively high. Electrical upsetting of non-ferrous metals and low carbon steel is usually accomplished by the use of such ELKONITE[®] materials as die facings. Cross-wire welding of large, diameter wire and rod is accomplished with such ELKONITE[®] materials.

ELKONITE[®] 3W53 and **10W53** are heat treatable grades of ELKONITE[®] materials supplied in the fully heat treated condition. If silver brazed to a die backing, such ELKONITE[®] materials should be heat treated after brazing. These harder grades are used primarily for electroforging and electrical upsetting dies, where temperatures and pressures are comparatively high.

ELKONITE[®] TC20 and **TC53** materials are extremely hard and wear resistant. ELKONITE[®] TC20 material, while somewhat difficult to machine, may be machined using carbide tipped tools. ELKONITE[®] TC53 material is a heat treatable grade of such high hardness that machining operations are impractical and the material must be ground. Such ELKONITE[®] materials are customarily used for special applications of electrical upsetting and electroforging.

ELKON[®] 100W is extremely hard and its ductility is relatively low. It cannot be machined but may be ground to the required shape. It does not alloy appreciably with nonferrous materials and is used for cross-wire welding of metals such as copper and brass. It is also used for electro brazing electrode material and for some electrical upsetting operations.

ELKON[®] 100M is used principally for electro brazing electrode material and for cross-wire welding of nonferrous metals. It is not as hard as ELKON[®] 100W material and may be machined or drilled to fit the parts to be joined. A typical application of this material, as an electrode, is the welding or brazing of braided or solid copper conductors to ferrous or nonferrous terminals, lugs or fittings.

ANVILOY[®] 1150 material is used in electro brazing applications where heat balance is important. The ANVILOY[®] 1150 material also has good anti-sticking qualities and good high temperature abrasion and hardness properties. The oxidation resistance of both materials is excellent up to 1100°F.

To convert from inches to metric we are including the three tables below to allow conversion from inches into millimeters.

Examples:

Convert 0.588 inches into millimeters
 From Table I 0.580 inches = 14.73 millimeters
 From Table I 0.008 inches = 0.203 millimeters
 Total 0.588 inches = 14.933 millimeters

Convert 3.065 inches into millimeters
 From Table II 3 inches = 76.2002 millimeters
 From Table I 0.060 inches = 1.524 millimeters
 From Table I 0.005 inches = 0.127 millimeters
 Total 3.065 inches = 77.8512 millimeters

Convert 2-51/64 inches into millimeters
 From Table II 2-25/32 inches = 70.6439 millimeters
 From Table II 1/64 inches = 0.3969 millimeters
 Total 2-51/64 inches = 71.0408 millimeters

TABLE I
Decimals of an inch into millimeters

Inches	Millimeters	Inches	Millimeters
0.001	0.025	0.460	11.68
0.002	0.051	0.470	11.94
0.003	0.076	0.480	12.19
0.004	0.102	0.490	12.45
0.005	0.127	0.500	12.70
0.006	0.152	0.510	12.95
0.007	0.178	0.520	13.21
0.008	0.203	0.530	13.26
0.009	0.229	0.540	13.72
0.010	0.254	0.550	13.97
0.020	0.508	0.560	14.22
		0.570	14.48
0.030	0.762	0.580	14.73
0.040	1.016	0.590	14.99
0.050	1.270	0.600	15.24
0.060	1.524	0.610	15.49
0.070	1.778	0.620	15.75
0.080	2.032	0.630	16.00
0.090	2.286	0.640	16.26
0.100	2.540	0.650	16.51
0.110	2.794	0.660	16.76
0.120	3.048	0.670	17.02
0.130	3.302	0.680	17.27
0.140	3.556	0.690	17.53
0.150	3.810	0.700	17.78
0.160	4.064	0.710	18.03
0.170	4.318	0.720	18.29
0.180	4.572	0.730	18.54
0.190	4.826	0.740	18.80
0.200	5.080	0.750	19.05
0.210	5.334	0.760	19.30
0.220	5.588	0.770	19.56
0.230	5.842	0.780	19.81
0.240	6.096	0.790	20.07
0.250	6.350	0.800	20.32
0.260	6.604	0.810	20.57
0.270	6.858	0.820	20.83
0.280	7.112	0.830	21.08
0.290	7.366	0.840	21.34
0.300	7.620	0.850	21.59
0.310	7.874	0.860	21.84
0.320	8.128	0.870	22.10
0.330	8.382	0.880	22.35
0.340	8.636	0.890	22.61
0.350	8.890	0.900	22.86
0.360	9.144	0.910	23.11
0.370	9.398	0.920	23.37
0.380	9.652	0.930	23.62
0.390	9.906	0.940	23.88
0.400	10.160	0.950	24.13
0.410	10.414	0.960	24.38
0.420	10.668	0.970	24.64
0.430	10.922	0.980	24.89
0.440	11.176	0.990	25.15
0.450	11.430	1.000	25.40

TABLE II
Fractions of an inch into millimeters


Inches	Millimeters	Inches	Millimeters
1/64	0.3969	33/64	13.0969
1/32	0.7937	17/32	13.4937
3/64	1.1906	35/64	13.8906
1/16	1.5875	9/16	14.2875
5/64	1.9844	37/64	14.6844
3/32	2.3812	19/32	15.0812
7/64	2.7781	39/64	15.4781
1/8	3.1750	5/8	15.8750
9/64	3.5719	41/64	16.2719
5/32	3.9687	21/32	16.6687
11/64	4.3656	43/64	17.0656
3/16	4.7625	11/16	17.4625
13/64	5.1594	45/64	17.8594
7/32	5.5562	23/32	18.2562
15/64	5.9531	47/64	18.6531
1/4	6.3500	3/4	19.0500
17/64	6.7469	49/64	19.4469
9/32	7.1437	25/32	19.8437
19/64	7.5406	51/64	20.2406
5/16	7.9375	13/16	20.6375
21/64	8.3344	53/64	21.0344
11/32	8.7312	27/32	21.4312
23/64	9.1281	55/64	21.8281
3/8	9.5250	7/8	22.2250
25/64	9.9219	57/64	22.6219
13/32	10.3187	29/32	23.0187
27/64	10.7156	59/64	23.4156
7/16	11.1125	15/16	23.8125
29/64	11.5094	61/64	24.2094
15/32	11.9062	31/32	24.6062
31/64	12.3031	63/64	25.0031
1/2	12.7000	1	25.4001

TABLE III
Gage-Decimal-Millimeter Conversion Chart

Gage	Decimal	Millimeter
3	.239	6.350
4	.234	5.953
5	.209	5.556
6	.194	5.159
7	.179	4.762
8	.164	4.365
9	.150	3.968
10	.135	3.571
11	.120	3.175
12	.105	2.778
13	.090	2.381
14	.075	1.984
15	.067	1.778
16	.060	1.587
17	.054	1.422
18	.048	1.270
19	.042	1.118
20	.036	.965
21	.033	.865
22	.030	.793
23	.027	.711
24	.024	.635
25	.021	.559
26	.018	.483
27	.016	.432
28	.015	.396
29	.014	.356
30	.012	.330
31	.011	.279
32	.010	.254
33	.009	.229
34	.0082	.216
35	.008	.203
36	.007	.178
37	.0064	.168
38	.006	.152

For Taper Dimensions in inches & millimeters see Page 7.

Standard Tapered Electrode Theoretical Dimensions	Taper Size	Standard Male Taper Cap taper Dimensions
--	------------	---

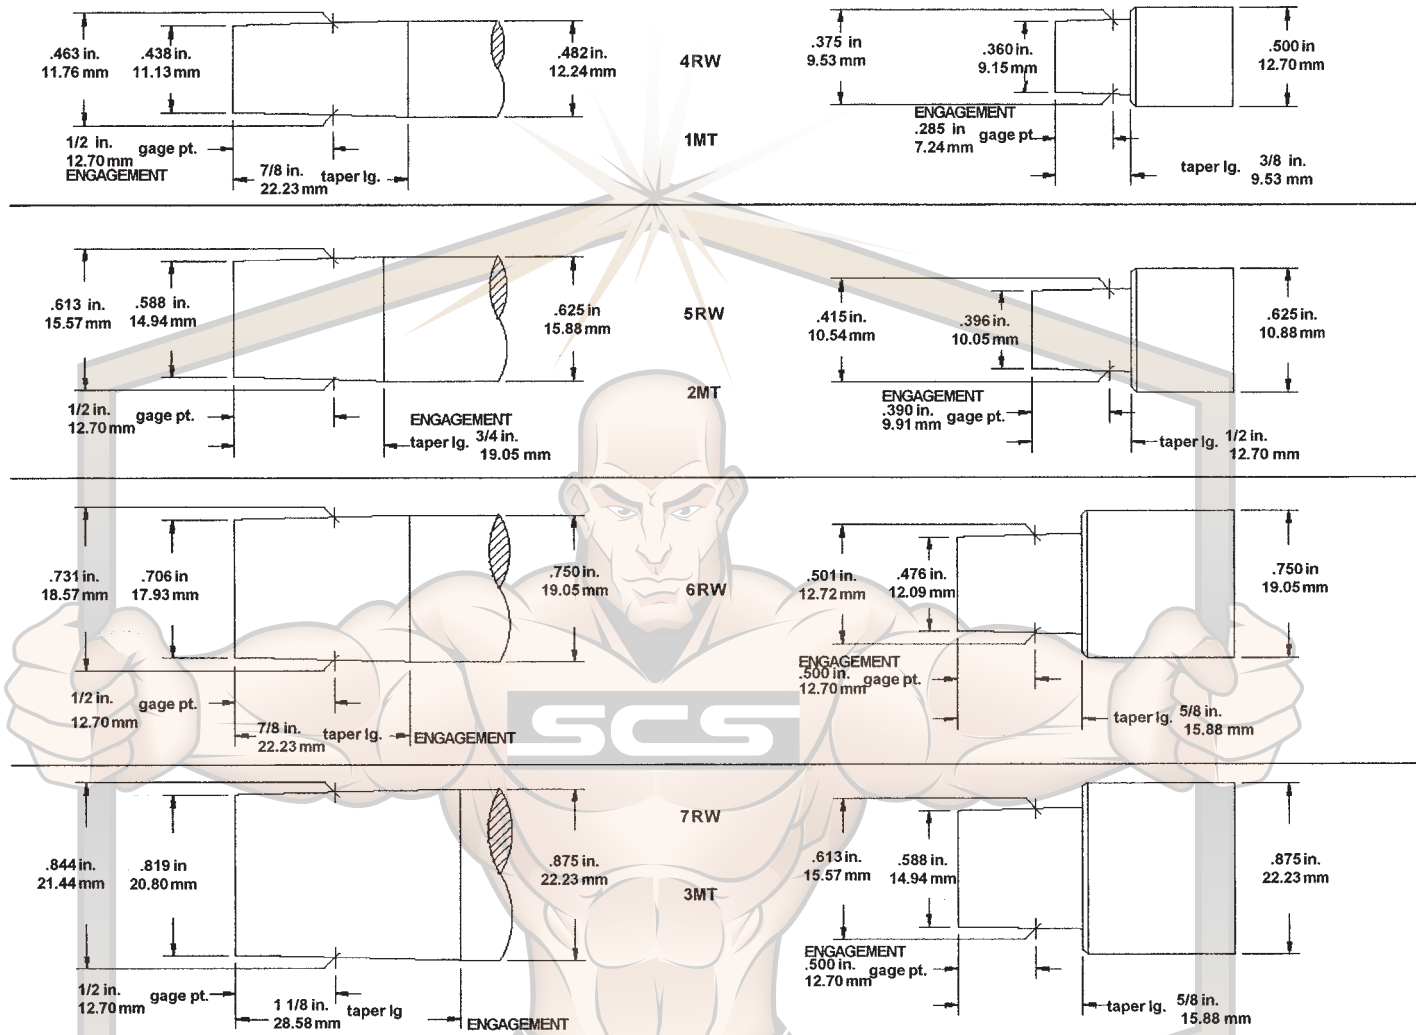

**CMW CODING
 FOR STRAIGHT TAPERED ELECTRODES**

X X X X X

Material	Nose	Attachment	Length
1 = CMW®28	1 = Dome	1 = No. 4RW	1 = 1"
	2 = Pointed	No. 1MT	2 = 1 1/4"
3 = CMW®3	3 = Flat		3 = 1 1/2"
5 = CMW®100	4 = Offset	2 = No. 5RW	4 = 1 3/4"
6 = ELKONITE® 10W3	5 = 2" Sph. R	No. 2MT	5 = 2"
7 = ELKONITE®TC5	6 = 10" Sph. R.		6 = 2 1/4"
8 = ELKON®100M	7 = Truncated	3 = No. 7RW	7 = 2 1/2"
9 = ELKON®100W	8 = 3" Sph. R	No. 3MT	8 = 2 3/4"
	9 = 4" Sph. R		9 = 3"
	0 = Shank for Male Cap	4 = No. 6RW	12 = 3 1/4"
			14 = 3 1/2"
			16 = 3 3/4"
			18 = 4"
			20 = 4 1/4"
			22 = 4 1/2"
Note: Prefix MP = Shank for Female Cap			

**RWMA CODING
 FOR STRAIGHT TAPERED ELECTRODES**

X X X X X

Nose	Material	Attachment	Length in no. of 1/4"
A = Pointed	1 = RWMA CL 1 CMW®28	4 = No. 4RW No. 1MT	04 = 1"
B = Dome			05 = 1 1/4"
			06 = 1 1/2"
			07 = 1 3/4"
			08 = 2"
C = Flat	2 = RWMA CL 2 CMW®3	5 = No. 5RW No. 2MT	09 = 2 1/4"
			10 = 2 1/2"
			11 = 2 3/4"
			12 = 3"
D = Offset		6 = No. 6RW	13 = 3 1/4"
			14 = 3 1/2"
			15 = 3 3/4"
	3 = RWMA CL 3 CMW®100		16 = 4"
E = Truncated		7 = No. 7RW No. 3MT	17 = 4 1/4"
			18 = 4 1/2"

These economical, quick change caps are made of long-lasting, highly-efficient CMW®28, CMW®3, and CMW®328 copper alloys, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements for use on CMW shanks.

CMW FEMALE CAP ELECTRODES

- See pages 12 for Shanks

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	POINTED (A)	DOMED (B)	FLAT (C)	OFFSET (D)	TRUNCATED (E)	RADIUS (F)
Cap Taper RW #4 Diameter .500* Length .840* CMW®28 CMW®3 CMW®328	 $\varnothing.3945^*$ $\varnothing.188$	 $\varnothing.188$	 $\varnothing.500$	 $\varnothing.188$ 40°	 45° $\varnothing.188$	 $R=2.00^*$
CMW®28 MPA14Z MPA24 MPA24Z	MPB14Z MPB24 MPB24Z	MPC14Z MPC24 MPC24Z	MPD14Z MPD24 MPD24Z	MPE14Z MPE24 MPE24Z	MPF14Z MPF24 MPF24Z	
Cap Taper RW #5 Diameter .625* Length .880* CMW®28 CMW®3 CMW®328	 $\varnothing.4951^*$ $\varnothing.250$	 $\varnothing.188$	 $\varnothing.625$	 $\varnothing.250$ 40°	 45° $\varnothing.250$	 $R=2.00^*$
CMW®28 MPA15Z MPA25 MPA25Z	MPB15Z MPB25 MPB25Z	MPC15Z MPC25 MPC25Z	MPD15Z MPD25 MPD25Z	MPE15Z MPE25 MPE25Z	MPF15Z MPF25 MPF25Z	
Cap Taper RW #6 Diameter .750* Length 1.000* CMW®28 CMW®3 CMW®328	 $\varnothing.6255^*$ $\varnothing.313$	 $\varnothing.250$	 $\varnothing.750$	 $\varnothing.313$ 45°	 45° $\varnothing.313$	 $R=4.00^*$
CMW®28 MPA16Z MPA26 MPA26Z	MPB16Z MPB26 MPB26Z	MPC16Z MPC26 MPC26Z	MPD16Z MPD26 MPD26Z	MPE16Z MPE26 MPE26Z	MPF16Z MPF26 MPF26Z	

CMW MALE CAP ELECTRODES

- See pages 13 for Shanks

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	POINTED (A)	DOMED (B)	FLAT (C)	OFFSET (D)	TRUNCATED (E)	RADIUS (F)
Cap Taper RW #4 Diameter .500* Length 1.125* CMW®28 CMW®3 CMW®328	 $\varnothing.3745^*$ $\varnothing.188$ $.285^*$	 $\varnothing.188$	 $\varnothing.500$	 $\varnothing.188$ 40°	 45° $\varnothing.188$	 $R=2.00^*$
CMW®28 MA14Z MA24 MA24Z	MB14Z MB24 MB24Z	MC14Z MC24 MC24Z	MD14Z MD24 MD24Z	ME14Z ME24 ME24Z	MF14Z MF24 MF24Z	
Cap Taper RW #5 Diameter .625* Length 1.250* CMW®28 CMW®3 CMW®328	 $\varnothing.4145^*$ $\varnothing.250$ $.390^*$	 $\varnothing.188$	 $\varnothing.625$	 $\varnothing.250$ 40°	 45° $\varnothing.250$	 $R=2.00^*$
CMW®28 MA15Z MA25 MA25Z	MB15Z MB25 MB25Z	MC15Z MC25 MC25Z	MD15Z MD25 MD25Z	ME15Z ME25 ME25Z	MF15Z MF25 MF25Z	
Cap Taper RW #6 Diameter .750* Length 1.625* CMW®28 CMW®3 CMW®328	 $\varnothing.5005^*$ $\varnothing.313$ $.500^*$	 $\varnothing.250$	 $\varnothing.750$	 $\varnothing.313$ 45°	 45° $\varnothing.313$	 $R=4.00^*$
CMW®28 MA16Z MA26 MA26Z	MB16Z MB26 MB26Z	MC16Z MC26 MC26Z	MD16Z MD26 MD26Z	ME16Z ME26 ME26Z	MF16Z MF26 MF26Z	

The CMW GCAP® electrode is the answer to welding galvanized steels. The GCAP's® revolutionary design, and precision manufacturing from CMW Engineering provides for no sticking from the very first weld. GCAP® electrode nuggets meet or exceed industry standards for high quality welds from the first weld through the life of the cap. This cap design from R.W.M.A. class 2 material eliminates brass build-up by literally rolling the brass away. You will use


less electric power (up to 25% less) and still achieve superior welds due to GCAP® design. Productivity will increase with up to 10 times more welds without dressing.

For best use of CMW GCAPs®, a stepper program is recommended. Consult CMW application engineering.
U.S. Patent 49,954,687; 5,015,816; 5,126,528.
Other patents pending.

CMW FEMALE GCAP® ELECTRODES

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 12 for Shanks
- See page 71 for suggested weld schedules



	STRAIGHT	OFFSET	OFFSET 15°	OFFSET 30°
Cap Taper RW #4 Diameter .500* Length .840*				
CMW®3	MPG244	MPGD244	MPGD244-1501	MPGD244-3001
Cap Taper RW #5 Diameter .625* Length .880*				
CMW®3	MPG254	MPGD254	MPGD254-1501	MPGD254-3001
Cap Taper RW #5 Diameter .625* Length .880*				
CMW®3	MPG255	MPGD255	MPGD255-1501	MPGD255-3001
Cap Taper RW #6 Diameter .750* Length 1.000*				
CMW®3	MPG266	MPGD266	MPGD266-1501	MPGD266-3001

CMW MALE GCAP® ELECTRODES

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

- See pages 13 for Shanks
- See page 71 for suggested weld schedules



	STRAIGHT	OFFSET	OFFSET 15°	OFFSET 30°
Cap Taper RW #4 Diameter .500* Length 1.125*				
CMW®3	MG244	MGD244	MGD244-1501	MGD244-3001
Cap Taper RW #5 Diameter .625* Length 1.250*				
CMW®3	MG254	MGD254	MGD254-1501	MGD254-3001
Cap Taper RW #5 Diameter .625* Length 1.250*				
CMW®3	MG255	MGD255	MGD255-1501	MGD255-3001
Cap Taper RW #6 Diameter .750* Length 1.625*				
CMW®3	MG266	MGD266	MGD266-1501	MGD266-3001

These economical, quick change caps are made of long lasting, highly efficient CMW[®]28, CMW[®]3, CMW[®]328 copper alloy, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements.

CMW FEMALE ASIAN CAP ELECTRODES

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.



ASIAN TYPE (D)



ASIAN TYPE (R)




ASIAN TYPE (F)




ASIAN TYPE (E)


Taper 1:9.6
Dia. 13mm (.512)*
Length 20mm (.787)*




MPB141Z-01
MPB241-01
MPB241Z-04



MPB141Z-02
MPB241-02
MPB241Z-07




MPC141Z-01
MPC241-01
MPC241Z-02




MPD141Z-01
MPD241-02
MPD241Z-02


Taper 1:9.6
Dia. 16mm (.625)*
Length 23mm (.906)*




MPB15Z-11
MPB25-14
MPB25Z-19



MPB15Z-12
MPB25-18
MPB25Z-20



MPC15Z-01
MPC25-02
MPC25Z-05



MPD15Z-03
MPD25-05
MPD25Z-04

These economical, quick change caps are made of long lasting, highly efficient CMW[®]328 copper alloy, precision manufactured to exacting tolerances in a wide range of standard configurations or to your special requirements.

CMW FEMALE METRIC-ISO 5821 CAP ELECTRODES

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	METRIC TYPE (A)	METRIC TYPE (B)	METRIC TYPE (C)	METRIC TYPE (D)
Taper 1:10 Dia. 13mm (.512)* Length 18mm (.709)*				
CMW [®] 328	MPF241Z-01	MPE241Z-01	MPC241Z-01	MPD241Z-01
Taper 1:10 Dia. 16mm (.625)* Length 20mm (.787)*				
CMW [®] 328	MPF25Z-01	MPE25Z-02	MPC25Z-02	MPD25Z-02

CMW FEMALE METRIC-ISO 5821 CAP ELECTRODES

ALL DIMENSIONS MARKED WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.

	METRIC TYPE (E)	METRIC TYPE (F)	METRIC TYPE (G)
Taper 1:10 Dia. 13mm (.512)* Length 18mm (.709)*			No Standard Available
CMW [®] 328	MPA241Z-01	MPB241Z-01	
Taper 1:10 Dia. 16mm (.625)* Length 20mm (.787)*			
CMW [®] 328	MPA25Z-03	MPB25Z-03	MPA25Z-09

CMW shanks are precision manufactured from CMW®3 class 2 material to provide a high quality mount for cap type electrodes. They are designed for high strength and electrical conductivity.

*These shanks are shown with a blind water hole for cap replacement without shutting off water. Shanks with through water holes are available, by adding "TH" to the basic part number. Example: MP30212TH.


SHANKS FOR FEMALE CAP ELECTRODES

- See pages 8 & 9 for CMW standard nose and GCAP® electrode caps




SHANKS FOR FEMALE CAPS WITH #4 RW TAPERS

Part No.	A	B
MP3012	1.25	1.75
MP3013	1.50	2.00
MP3014	1.75	2.25
MP3015	2.00	2.50
MP3016	2.25	2.75
MP3017	2.50	3.00
MP3018	2.75	3.25
MP3019	3.00	3.50
MP30112	3.25	3.75
MP30114	3.50	4.00
MP30116	3.75	4.25
MP30118	4.00	4.50



BENT OFFSET SHANKS FOR FEMALE CAPS WITH #4 RW TAPERS


Part No.	A	B	C
MP3019-08	2.62	3.28	0.50
MP3019-12	2.56	3.22	0.75
MP30112-12	2.81	3.47	0.75
MP30112-16	2.37	3.03	1.00
MP30116-16	2.87	3.53	1.00
MP30116-20	2.60	3.28	1.25



Bent Dimensions for Reference Only


SHANKS FOR FEMALE CAPS WITH #5 RW TAPERS

Part No.	A	B
MP3023	1.46	2.00
MP3024	1.71	2.25
MP3025	1.96	2.50
MP3026	2.21	2.75
MP3027	2.46	3.00
MP3028	2.71	3.25
MP3029	2.96	3.50
MP30212	3.21	3.75
MP30214	3.46	4.00
MP30216	3.71	4.25
MP30218	3.96	4.50
MP30220	4.21	4.75
MP30222	4.46	5.00



BENT OFFSET SHANKS FOR FEMALE CAPS WITH #5 RW TAPERS


Part No.	A	B	C
MP3029-08	2.58	3.20	0.50
MP3029-12	2.60	3.12	0.75
MP30212-12	2.77	3.44	0.75
MP30212-16	2.33	3.00	1.00
MP30214-12	3.00	3.66	0.75
MP30214-16	2.81	3.48	1.00
MP30216-16	2.83	3.49	1.00
MP30216-20	2.77	3.43	1.25

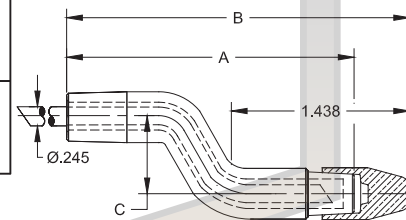

Bent Dimensions for Reference Only


SHANKS FOR FEMALE CAPS WITH #6 RW TAPERS

Part No.	A	B
MP3044	1.64	2.25
MP3045	1.89	2.50
MP3046	2.14	2.75
MP3047	2.39	3.00
MP3048	2.64	3.25
MP3049	2.89	3.50
MP30412	3.14	3.75
MP30414	3.39	4.00
MP30416	3.64	4.25
MP30418	3.89	4.50
MP30420	4.14	4.75
MP30422	4.39	5.00

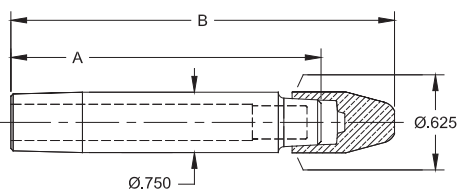

BENT OFFSET SHANKS FOR FEMALE CAPS WITH #6 RW TAPERS

Part No.	A	B	C
MP3049-08	2.69	3.30	0.50
MP30412-12	2.81	3.42	0.75
MP30414-12	2.94	3.55	0.75
MP30416-16	3.06	3.67	1.00
MP30420-20	3.25	3.86	1.25

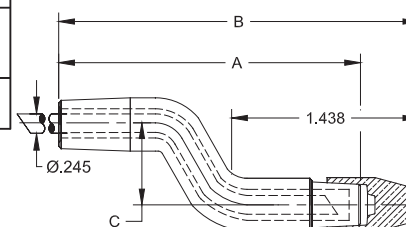

Bent Dimensions for Reference Only

CMW shanks are precision manufactured from CMW®3 class 2 material to provide a high quality mount for cap type electrodes. They are designed for high strength and electrical conductivity.


SHANKS FOR MALE CAP ELECTRODES

- See pages 8 & 9 for CMW standard nose and GCAP® electrode caps




SHANKS FOR MALE CAPS WITH #4 RW TAPERS

Part No.	A	B
3012	1.25	1.88
3013	1.50	2.12
3014	1.75	2.38
3015	2.00	2.62
3016	2.25	2.88
3017	2.50	3.12
3018	2.75	3.38
3019	3.00	3.62
30112	3.25	3.88
30114	3.50	4.12
30116	3.75	4.38
30118	4.00	4.62

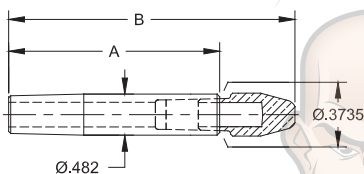

BENT OFFSET SHANKS FOR MALE CAPS WITH #4 RW TAPERS


Part No.	A	B	C
3019-08	2.62	3.37	0.50
3019-12	2.56	3.31	0.75
30112-12	2.81	3.56	0.75
30112-16	2.37	3.12	1.00
30116-16	2.87	3.62	1.00
30116-20	2.62	3.37	1.25



Bent Dimensions for Reference Only


SHANKS FOR MALE CAPS WITH #5 RW TAPERS

Part No.	A	B
3022	1.25	2.00
3023	1.50	2.25
3024	1.75	2.50
3025	2.00	2.75
3026	2.25	3.00
3027	2.50	3.25
3028	2.75	3.50
3029	3.00	3.75
30212	3.25	4.00
30214	3.50	4.25
30216	3.75	4.50
30218	4.00	4.75
30220	4.25	5.00
30222	4.50	5.25

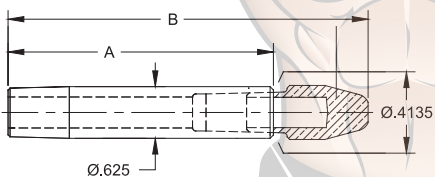

BENT OFFSET SHANKS FOR MALE CAPS WITH #5 RW TAPERS


Part No.	A	B	C
3028-08	2.37	3.12	0.50
3028-12	2.31	3.06	0.75
30212-12	2.81	3.56	0.75
30212-16	2.37	3.12	1.00
30214-12	3.06	3.81	0.75
30214-16	2.62	3.37	1.00
30214-20	2.37	3.12	1.25
30216-16	2.87	3.62	1.00
30216-20	2.62	3.37	1.25

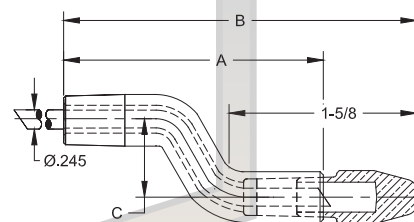

Bent Dimensions for Reference Only


SHANKS FOR MALE CAPS WITH #6 RW TAPERS

Part No.	A	B
3043	1.50	2.62
3044	1.75	2.88
3045	2.00	3.12
3046	2.25	3.38
3047	2.50	3.62
3048	2.75	3.88
3049	3.00	4.12
30412	3.25	4.38
30414	3.50	4.62
30416	3.75	4.88
30418	4.00	5.12
30420	4.25	5.38
30422	4.50	5.62

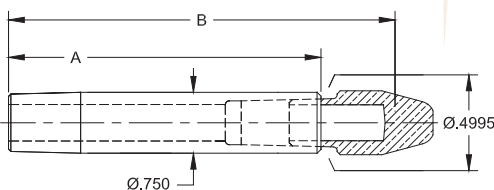



BENT OFFSET SHANKS FOR MALE CAPS WITH #6 RW TAPERS

Part No.	A	B	C
30412-08	2.62	3.75	0.50
30412-12	2.56	3.69	0.75
30414-12	2.75	3.88	0.75
30416-16	2.87	4.00	1.00
30420-20	3.12	4.25	1.25

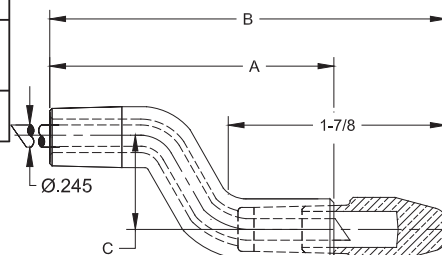

Bent Dimensions for Reference Only

STRAIGHT ELECTRODES

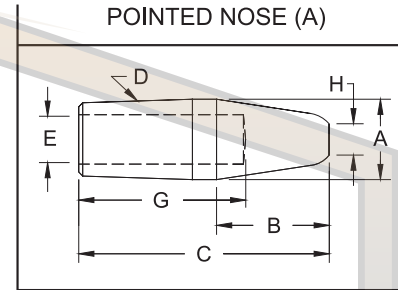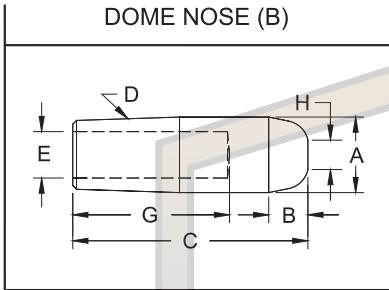

4 RW TAPER (D)			
CMW [®] 28	CMW [®] 3	CMW [®] 100	Nose Length B
Class 1	Class 2	Class 3	
1111	3111	5111	13/64
1112	3112	5112	1/4
1113	3113	5113	1/4
1114	3114	5114	1/4
1115	3115	5115	
1116	3116	5116	
1117	3117	5117	1/4
1118	3118	5118	
1119	3119	5119	
11112	31112	51112	
11114	31114	51114	1/4
11116	31116	51116	
11118	31118	51118	1/4

COMMON DIMENSIONS				
Face Dia. H	Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
3/16	.482	9/32	1	5/8
			1-1/4	3/4
			1-1/2	1
			1-3/4	1-1/4
			2	1-1/2
			2-1/4	1-3/4
			2-1/2	2
			2-3/4	2-1/4
			3	2-1/2
			3-1/4	2-3/4
			3-1/2	3
			3-3/4	3-1/4
4	3-1/2			

4 RW TAPER (D)			
CMW [®] 28	CMW [®] 3	CMW [®] 100	Nose Length B
Class 1	Class 2	Class 3	
1211	3211	5211	3/8
1212	3212	5212	3/8
1213	3213	5213	5/8
1214	3214	5214	3/4
1215	3215	5215	
1216	3216	5216	
1217	3217	5217	3/4
1218	3218	5218	
1219	3219	5219	
12112	32112	52112	
12114	32114	52114	3/4
12116	32116	52116	
12118	32118	52118	3/4



5 RW TAPER (D)			
CMW [®] 28	CMW [®] 3	CMW [®] 100	Nose Length B
Class 1	Class 2	Class 3	
1122	3122	5122	3/8
1123	3123	5123	
1124	3124	5124	
1125	3125	5125	
1126	3126	5126	
1127	3127	5127	
1128	3128	5128	
1129	3129	5129	
11212	31212	51212	
11214	31214	51214	
11216	31216	51216	
11218	31218	51218	
11220	31220	51220	1-1/8
11222	31222	51222	

COMMON DIMENSIONS				
Face Dia. H	Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
1/4	.625	3/8	1-1/4	3/4
			1-1/2	3/4
			1-3/4	1
			2	1-1/4
			2-1/4	1-1/2
			2-1/2	1-3/4
			2-3/4	2
			3	2-1/4
			3-1/4	2-1/2
			3-1/2	2-3/4
			3-3/4	3
			4	3-1/4
4-1/4	3-1/2			
4-1/2	3-3/4			

5 RW TAPER (D)			
CMW [®] 28	CMW [®] 3	CMW [®] 100	Nose Length B
Class 1	Class 2	Class 3	
1222	3222	5222	1/2
1223	3223	5223	3/4
1224	3224	5224	3/4
1225	3225	5225	1-1/8
1226	3226	5226	
1227	3227	5227	
1228	3228	5228	1-1/8
1229	3229	5229	
12212	32212	52212	
12214	32214	52214	
12216	32216	52216	1-1/8
12218	32218	52218	
12220	32220	52220	1-1/8
12222	32222	52222	

*Electrodes of other tapers and alloys available upon request.

STRAIGHT ELECTRODES

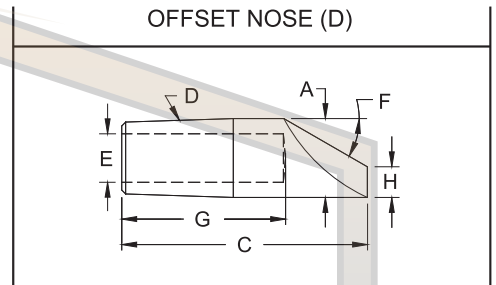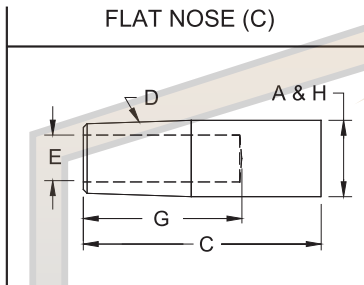

4 RW TAPER (D)			
CMW [®] 28 Class 1	CMW [®] 3 Class 2	CMW [®] 100 Class 3	Face Dia. H
1311	3311	5311	.482
1312	3312	5312	
1313	3313	5313	
1314	3314	5314	
1315	3315	5315	
1316	3316	5316	
1317	3317	5317	
1318	3318	5318	
1319	3319	5319	
13112	33112	53112	
13114	33114	53114	
13116	33116	53116	
13118	33118	53118	

COMMON DIMENSIONS			
Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
.482	9/32	1	5/8
		1-1/4	3/4
		1-1/2	1
		1-3/4	1-1/4
		2	1-1/2
		2-1/4	1-3/4
		2-1/2	2
		2-3/4	2-1/4
		3	2-1/2
		3-1/4	2-3/4
		3-1/2	3
		3-3/4	3-1/4
4	3-1/2		

4 RW TAPER (D)				
CMW [®] 28 Class 1	CMW [®] 3 Class 2	CMW [®] 100 Class 3	Nose Angle F	Face Dia. H
1411	3411	5411	45°	3/16
1412	3412	5412	40°	
1413	3413	5413	30°	
1414	3414	5414	30°	
1415	3415	5415		
1416	3416	5416		
1417	3417	5417	30°	
1418	3418	5418		
1419	3419	5419		
14112	34112	54112	30°	
14114	34114	54114		
14116	34116	54116		
14118	34118	54118		

5 RW TAPER (D)			
CMW [®] 28 Class 1	CMW [®] 3 Class 2	CMW [®] 100 Class 3	Face Dia. H
1322	3322	5322	5/8
1323	3323	5323	
1324	3324	5324	
1325	3325	5325	
1326	3326	5326	
1327	3327	5327	
1328	3328	5328	
1329	3329	5329	
13212	33212	53212	
13214	33214	53214	
13216	33216	53216	
13218	33218	53218	
13220	33220	53220	
13222	33222	53222	


COMMON DIMENSIONS			
Major Dia. A	Water Hole Dia. E	Overall Length C	Hole Depth G
.625	3/8	1-1/4	3/4
		1-1/2	3/4
		1-3/4	1
		2	1-1/4
		2-1/4	1-1/2
		2-1/2	1-3/4
		2-3/4	2
		3	2-1/4
		3-1/4	2-1/2
		3-1/2	2-3/4
		3-3/4	3
		4	3-1/4
4-1/4	3-1/2		
4-1/2	3-3/4		

5 RW TAPER (D)				
CMW [®] 28 Class 1	CMW [®] 3 Class 2	CMW [®] 100 Class 3	Nose Angle F	Face Dia. H
1422	3422	5422	40°	1/4
1423	3423	5423	40°	
1424	3424	5424	30°	
1425	3425	5425	30°	
1426	3426	5426		
1427	3427	5427		
1428	3428	5428	30°	
1429	3429	5429		
14212	34212	54212		
14214	34214	54214	30°	
14216	34216	54216		
14218	34218	54218		
14220	34220	54220		
14222	34222	54222		

*Electrodes of other tapers and alloys available upon request.

STRAIGHT ELECTRODES


TRUNCATED (E)								
CMW® 28	CMW® 3	CMW® 100	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
Class 1	Class 2	Class 3						
1712	3712	5712	.482	1-1/4	4RW	3/4	3/16	9/32
1713	3713	5713		1-1/2		1		
1715	3715	5715		2		1-1/2		
1717	3717	5717		2-1/2		2		
1718	3718	5718		2-3/4		2-1/4		
1723	3723	5723	.625	1-1/2	5RW	3/4	1/4	3/8
1725	3725	5725		2		1-1/4		
1727	3727	5727		2-1/2		1-3/4		
1729	3729	5729		3		2-1/4		
17218	37218	57218		4		3-1/4		



TRUNCATED NOSE (E)




RADIUS (F)								
CMW® 28	CMW® 3	CMW® 100	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Spherical Radius R	Water Hole Dia. E
Class 1	Class 2	Class 3						
1523	3523	5523	.625	1-1/2	5RW	3/4	2	3/8
1525	3525	5525		2		1-1/4		
1527	3527	5527		2-1/2		1-3/4		
1529	3529	5529		3		2-1/4		
15218	35218	55218		4		3-1/4		
1623	3623	5623	.625	1-1/2	5RW	3/4	10	3/8
1625	3625	5625		2		1-1/4		
1627	3627	5627		2-1/2		1-3/4		
1629	3629	5629		3		2-1/4		
16218	36218	56218		4		3-1/4		
1825	3825	5825	.625	2	5RW	1-1/4	3	3/8
1829	3829	5829		3		2-1/4		
1925	3925	5925		2		1-1/4		
1929	3929	5929		3		2-1/4		



RADIUS NOSE (F)



30° OFFSET								
CMW® 28	CMW® 3	Major Dia. A	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E	
Class 1	Class 2							
16-2491	16-2494	.482	2	4RW	1-1/2	1/4	9/32	
16-2492	16-2495	.625	2-1/2	5RW	2	3/8	3/8	
16-2493	16-2496	.875	3	7RW	2-1/4	1/2	1/2	




30° OFFSET NOSE



- See page 6 for Metric conversions, & See page 7 for Taper dimensions

ELKONITE® AND ELKON® FACED STRAIGHT ELECTRODES


ELKONITE® AND ELKON® DOME NOSE									
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
611050	811050	911050	.482	3/16	2	4RW	1-1/2	1/8	9/32
612050	812050	912050	.625	1/4	2	5RW	2	3/8	3/8



DOME NOSE




ELKONITE® AND ELKON® FLAT NOSE									
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
631050	831050	931050	.482	3/16	2	4RW	1-1/2	.482	9/32
632030	832050	932050	.625	1/4	1-1/2	5RW	1	5/8	3/8
632050				2	1-1/2		1-1/2		
632070				2-1/2	2		2		
16-1353				2-1/2	2		5/8		
633050	833050	933050	.875	1/4	2	7RW	1-1/2	7/8	1/2



FLAT NOSE



ELKON® CENTERED INSERT NOSE									
Elkonite® 10W3 Face	Elkon® 100M Face	Elkon® 100W Face	Major Dia. A	Nose Length B	Overall Length C	Taper D	Hole Depth G	Face Dia. H	Water Hole Dia. E
871050	971050		.482	3/8	2	4RW	1-1/2	3/16	9/32
872050	972050		.625	3/8	2	5RW	1-1/4	1/4	3/8



INSERT NOSE






- Electrodes of other tapers and alloys available upon request. For other ELKONITE® and ELKON® materials see page 5 and for other recommended uses see the chart on page 76. Electrodes faced with material other than those shown on this page are available to special order.

CMW®3 single bend electrodes are cold formed from full hard straight electrodes, and have properties superior to those obtained by casting or hot forging methods. Cooling tubes are bent in place, if requested, to provide water flow as near to the welding face as in the case of straight electrodes. These extra values assure you a more efficient, less costly electrode for gun welders and special offset welding applications.

Furnished with water tubes as specials to your order. Other nose types available to order. For dimensions not shown here see straight electrode (round water hole) measurements on page 14, 15, & 16. CMW®28 material available on special order.

SINGLE BEND ELECTRODES

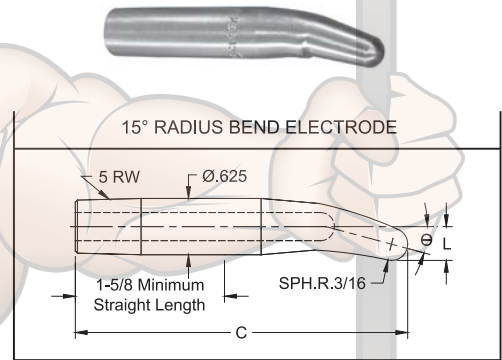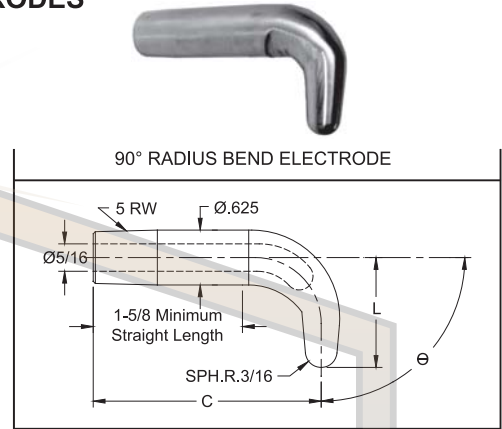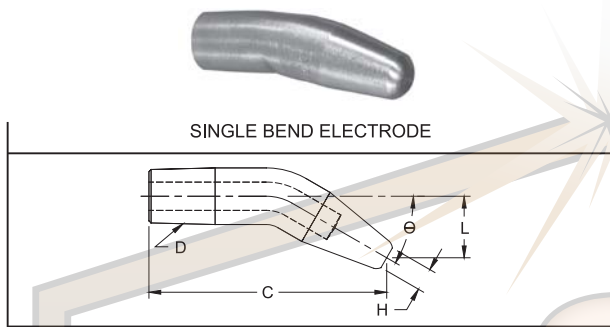


PART No.	Reference Length to ϕ of Face C	Taper D	Offset ϕ of Taper to ϕ of Face L	Bend Angle θ	Bend Weld Face Dia. H			
3214-04-15	1-11/16	4 RW	1/4	15°	3/16			
3219-04-15	2-15/16		1/4					
32118-13-15	3-7/8		13/16					
3225-04-15	1-7/8	5 RW	1/4		30°	1/4		
3229-04-15	2-7/8		1/4					
32218-10-15	3-13/16		5/8					
3215-07-30	1-7/8	4 RW	7/16			45°	3/16	
3219-07-30	2-7/8		7/16					
32118-23-30	3-5/8		1-7/16					
3226-09-30	2-1/16	5 RW	9/16				60°	1/4
32212-09-30	3-1/16		9/16					
32220-24-30	3-13/16		1-1/2					
3215-10-45	1-11/16	4 RW	5/8	75°				3/16
32112-12-45	2-7/8		3/4					
32118-33-45	3-1/8		2-1/16					
3228-17-45	2-1/4	5 RW	1-1/16		90°			1/4
32214-17-45	3		1-1/16					
32220-33-45	3-3/8		2-1/16					
3218-23-60	2	4 RW	1-7/16			60°		3/16
32116-23-60	3		1-7/16					
32118-40-60	2-5/8		2-1/2					
32212-25-60	2-3/8	5 RW	1-9/16				75°	1/4
32218-25-60	3-1/8		1-9/16					
32220-38-60	3		2-3/8					
32216-35-75	2-5/16	5 RW	2-3/16	90°				3/16
32220-37-75	2-11/16		2-5/16					
32220-43-75	2-3/8		2-11/16					

PART No.	O.A.L. C	Offset ϕ of Taper to Top of Radius L	Bend Angle θ
16-26015	3-11/16	3/8	15°
16-26030	3-5/8	33/64	30°
16-26045	3-1/2	43/64	45°
16-26060	3-3/8	27/32	60°
16-26075	3-7/64	1-1/32	75°
16-26090	2-13/16	1-1/4	90°

Radius bend electrodes are designed for use with 18-768 & 18-784 straight universal adapters shown on page 46.


Bend dimensions are for reference only

- See page 6 for Metric Conversion
 - See page 7 for Taper Dimensions

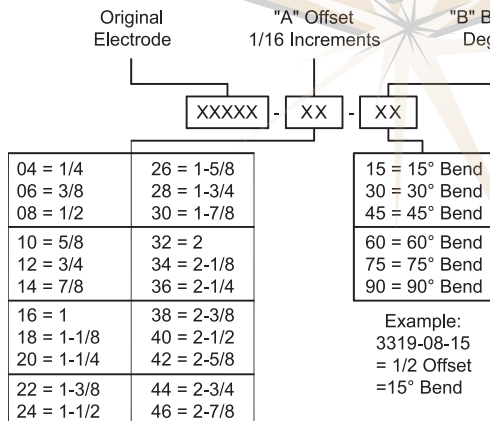

SINGLE BEND ELECTRODE CODING SYSTEM


For electrodes not listed

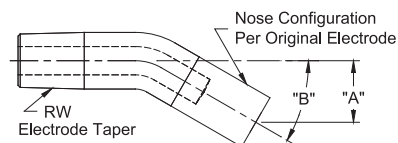

DOUBLE BEND ELECTRODES


CMW double bend electrodes are cold formed from full hard straight electrodes, and have properties superior to those obtainable by casting or hot forging methods. Cooling tubes, unless otherwise specified are bent in place to provide coolant flow near the welding face as in the case of straight electrodes. These extra values assure you of longer electrode life, longer runs between dressings, and highest weld quality. CMW®3 material is standard for these electrodes. CMW®28, CMW®100, available on special order.

Offset D	Taper Size	Nose End N	Taper End T	Dome, Pointed & Flat, O.A.L. C	Pointed Nose Part No.
1/2	4 RW	3/4	7/8	2	321-0832-23
		3/4	7/8	2-1/2	321-0840-23
	2	7/8	3-1/4	321-0852-93	
	5 RW	1	1	2-1/2	322-0840-44
1		1	2-3/4	322-0844-44	
1		1	3-1/4	322-0852-44	
2		1	3-1/2	322-0856-94	
3/4	4 RW	3/4	7/8	2	321-1232-23
		3/4	7/8	2-1/2	321-1240-23
	2	7/8	3-1/2	321-1256-93	
	5 RW	1	1	2-3/4	322-1244-44
1		1	3	322-1248-44	
2		1	3-1/2	322-1256-94	
1	4 RW	3/4	7/8	2-1/4	321-1636-23
		3/4	7/8	2-3/4	321-1644-23
		1-3/4	7/8	3-1/4	321-1652-83
		3/4	7/8	3-1/2	321-1656-23
	5 RW	1	1	2-3/4	322-1644-44
		1	1	3	322-1648-44
		1	1	3-1/2	322-1656-44
		1-3/4	1	3-1/2	322-1656-84
1-1/4	4 RW	3/4	7/8	2-1/2	321-2040-23
		3/4	7/8	3	321-2048-23
		1-1/2	7/8	3	321-2048-73
	5 RW	1	1	2-3/4	322-2044-44
		1	1	3-1/4	322-2052-44
		1	1	3-1/2	322-2056-44
1-1/2	5 RW	1	1	3-1/2	322-2056-74
		1-3/4	1	3-1/2	322-2056-84
		1	1	2-3/4	322-2444-44
		1-1/4	1	3	322-2448-64
1-3/4	5 RW	1	1	2-3/4	322-2844-44
		1-1/4	1	3	322-2848-64

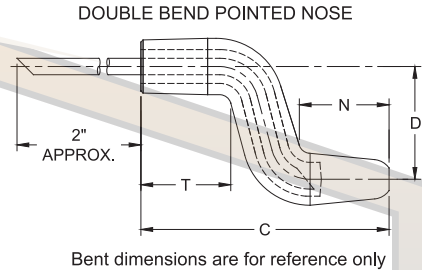


Water Tube Sizes:
4RW = .182 O.D.
5RW = .245 O.D.

DOUBLE BEND ELECTRODE CODING SYSTEM

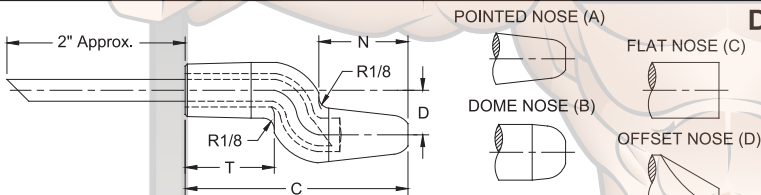

EXAMPLE:
322-0840-44

- 1" TAPER LENGTH (T)
- 1" NOSE LENGTH (N)
- 2 1/2" OVERALL LENGTH (C)
- 1/2" OFFSET (D)
- 5RW TAPER
- POINTED NOSE
- CMW®3 MATERIAL

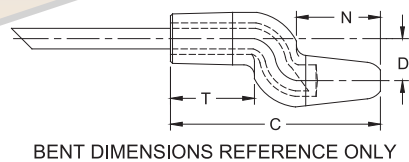

Offset (D)
Overall Length (C)
Nose Length (N)
Taper Length (T)
Optional Without Water Tube

Taper
Nose
Material

X X X - X X X X X - X X Z

1= CMW®28	1= DOME	1= 4RW 1MT	08= 1/2"	32= 2"	2= 3/4"
3= *CMW®3	2= *POINTED	2= 5RW 2MT	12= 3/4"	36= 2 1/4"	3= 7/8"
5= CMW®100	3= FLAT		16= 1"	40= 2 1/2"	4= 1"
*Standard	4= OFFSET		20= 1 1/4"	44= 2 3/4"	** 5= 1 1/8"
			24= 1 1/2"	48= 3"	** 6= 1 1/4"
			28= 1 3/4"	52= 3 1/4"	** 7= 1 1/2"
				56= 3 1/2"	** 8= 1 3/4"
				60= 3 3/4"	** 9= 2"

**May not be a stock item

Standard 4RW nose length = 3/4"

Standard 4RW taper length = 7/8"

Standard 5RW nose & taper length = 1"

Water Tube Sizes:
4RW = .182 O.D.
5RW = .245 O.D.

- See Page 6 for Metric Conversion
- See Page 7 for Taper Dimensions

FEATURES AND SPECIFICATIONS

- Very strong bend electrodes for higher force applications

- Bent & Offset electrodes are for hard to reach locations

- Long lasting heavy duty electrodes

- Works with all industry standard holders



- Use with 4 & 5 R.W.M.A Holders

- Bent dimensions are for reference only


- Electrical conductivity up to 85% IACS for cold formed crank electrodes

- Rockwell hardness up to 83 HRB for cold formed crank electrodes


CRANK ELECTRODES - COLD FORMED

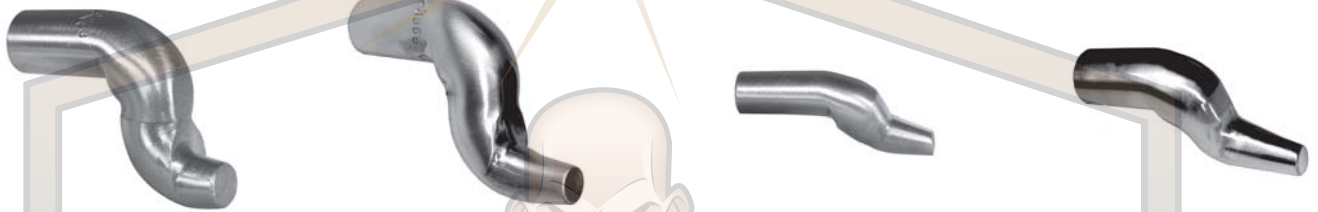


16-38661 CMW°3
COLD FORMED*




16-3866 CMW°3
COLD FORMED*

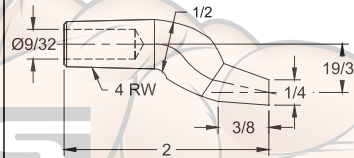


16-3870 CMW°3
COLD FORMED*




16-3871 CMW°3
COLD FORMED*

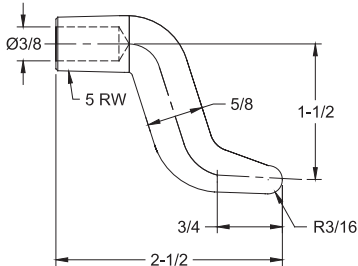


16-38351 CMW°3
COLD FORMED*

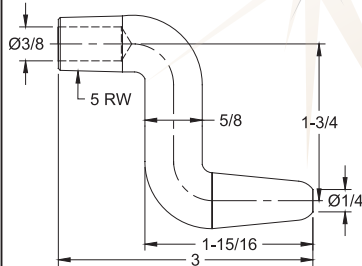

16-38352 CMW°3
COLD FORMED*



16-38353 CMW°3
COLD FORMED*



*Optional materials CMW°28 and CMW°100 available on special order


FEATURES AND SPECIFICATIONS

- Very strong bend electrodes for higher force applications
- Offset electrodes are for hard to reach locations
- Long lasting heavy duty electrodes


- Can be used in many job shop applications
- Works with all industry standard holders
- Use with 4 & 5 R.W.M.A Holders

- Electrical conductivity up to 80% IACS for castings & forged crank electrodes
- Rockwell hardness up to 70 HRB for castings & forged crank electrodes


CRANK ELECTRODES - CASTING, FORGED

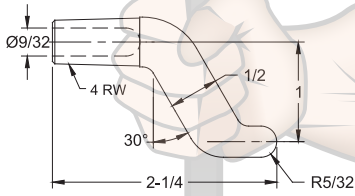


16-3835 CMW[®]3
CASTING

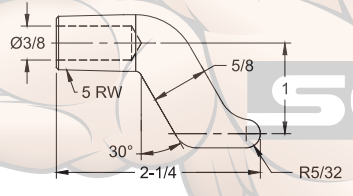


16-3836 CMW[®]3
CASTING




16-3837 CMW[®]3
CASTING




16-3838 CMW[®]3
CASTING

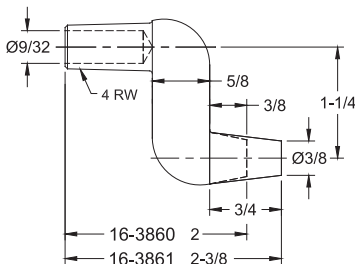


CMW[®]3
FORGED

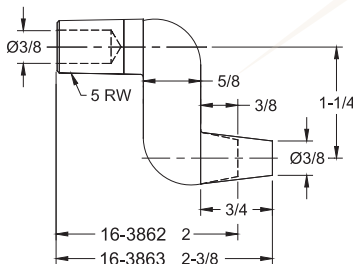

CMW[®]3
FORGED



16-3873 CMW[®]3
CASTING




16-3874 CMW[®]3
CASTING

- See page 6 for
Metric Conversions
- See page 7 for
Taper Dimensions


SPADE ELECTRODES




Bent Dimensions for Reference Only

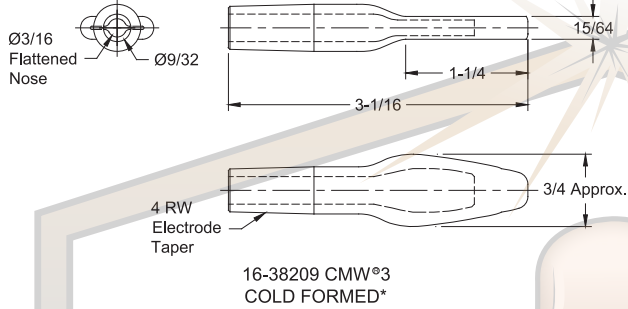


Bent Dimensions for Reference Only

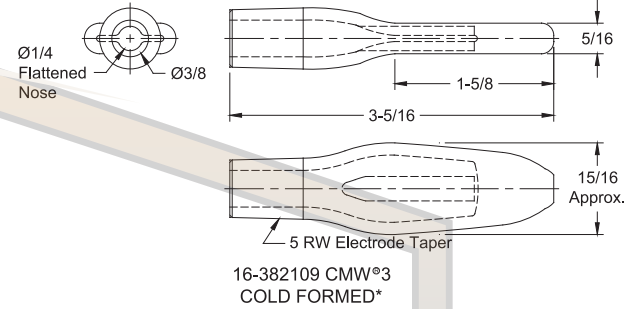


Bent Dimensions for Reference Only

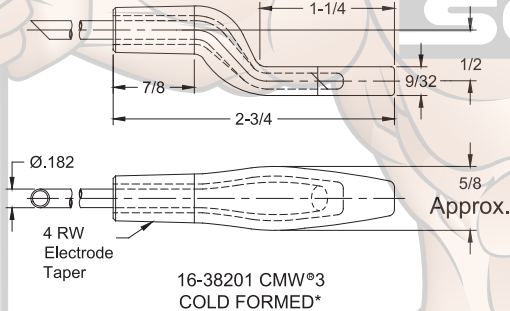


Bent Dimensions for Reference Only

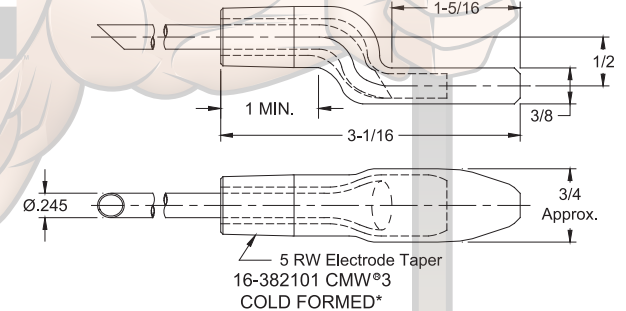

Bent Dimensions for Reference Only

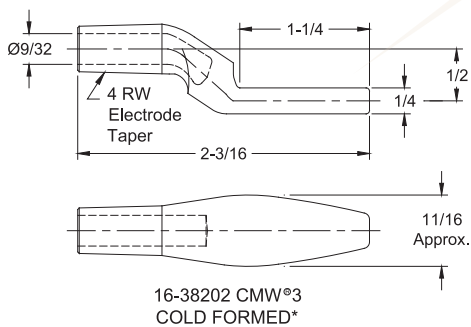


Bent Dimensions for Reference Only

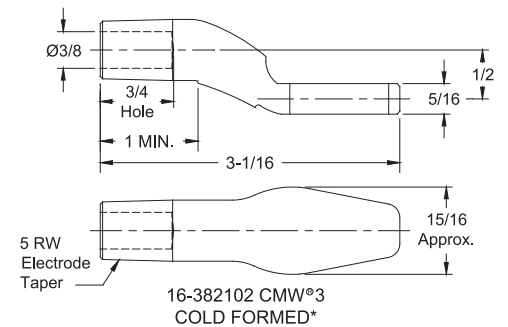


*Optional material available on special order: CMW[®]28 & CMW[®]100

GUN ELECTRODES

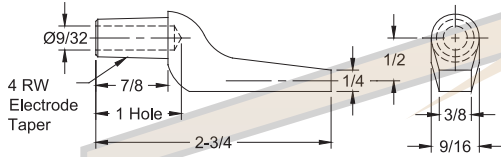


16-3820 CMW[®]3
CASTING

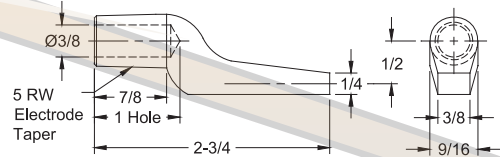


16-3821 CMW[®]3
CASTING

Bent Dimensions for Reference Only

Bent Dimensions for Reference Only

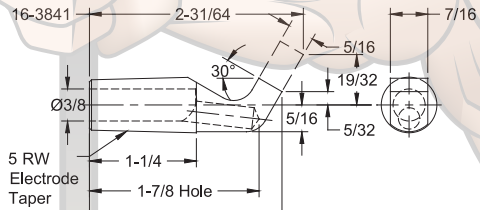


16-3840 & 16-3841 CMW[®]3
COLD FORMED*

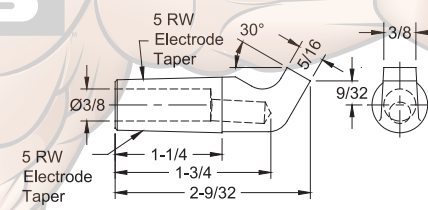

16-3847 CMW[®]3
COLD FORMED*



*Optional material CMW[®]28 & CMW[®]100 available on special order.

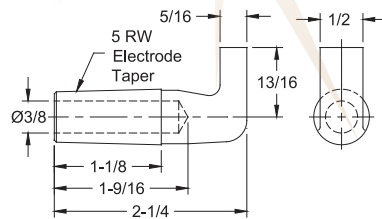



16-382120 CMW[®]3
CASTING

- See page 6 for
Metric Conversions
- See page 7 for
Taper Dimensions



CHAMELEON/MAX-LIFE™ NUT WELDING ELECTRODES

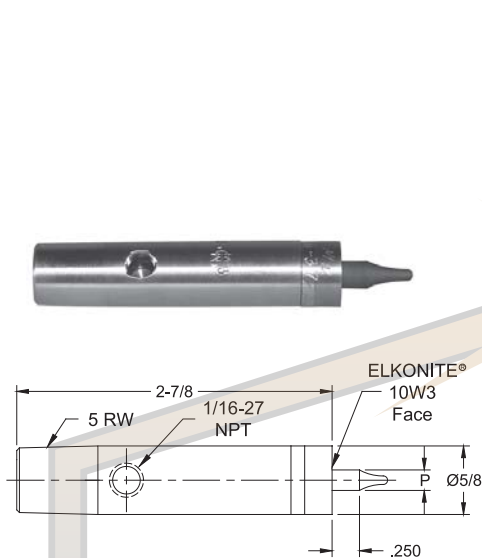


Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37725-04	#4	.142	16-37325	16-950078-01	16-950064-04	16-37725-C04
16-37725-05	#5	.158	16-37325	16-950078-01	16-950064-05	16-37725-C05
16-37725-06	#6	.173	16-37325	16-950078-01	16-950064-06	16-37725-C06
16-37725-M4	4MM	.187	16-37325	16-950078-01	16-950064-M4S	16-37725-CM4
16-37725-08	#8	.198	16-37325	16-950078-01	16-950064-08	16-37725-C08
16-37725-10	#10	.220	16-37325	16-950078-01	16-950064-10	16-37725-C10
16-37725-M5	5MM	.226	16-37325	16-950078-01	16-950064-M5S	16-37725-CM5
16-37725-12	#12	.250	16-37325	16-950078-01	16-950064-12	16-37725-C12
16-37725-M6	6MM	.266	16-37325	16-950078-01	16-950064-M6S	16-37725-CM6
16-37725-25	.250	.283	16-37325	16-950078-01	16-950064-25	16-37725-C25

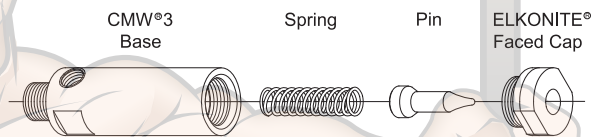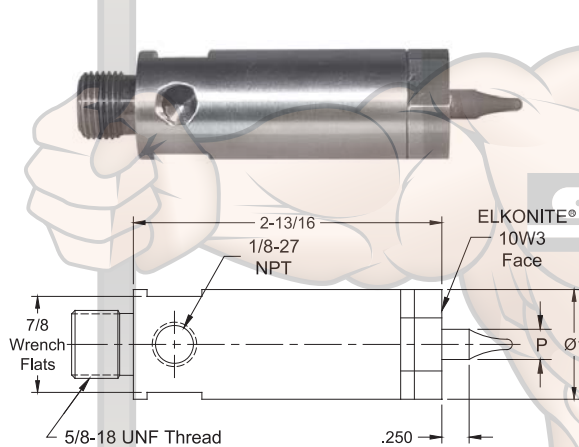

Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37825-M4	4MM	.187	16-37825	16-950065-01	16-950064-M4	16-37825-CM4
16-37825-M5	5MM	.226	16-37825	16-950065-01	16-950064-M5	16-37825-CM5
16-37825-M6	6MM	.266	16-37825	16-950065-01	16-950064-M6	16-37825-CM6
16-37825-M7	7MM	.305	16-37825	16-950065-01	16-950064-M7	16-37825-CM7
16-37825-M8	8MM	.344	16-37825	16-950065-01	16-950064-M8	16-37825-CM8
16-37825-M9	9MM	.384	16-37825	16-950065-01	16-950064-M9	16-37825-CM9

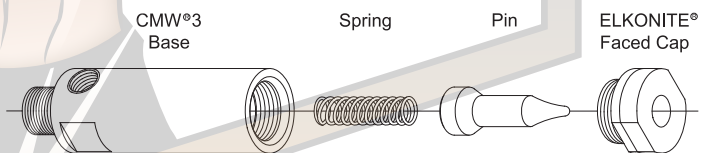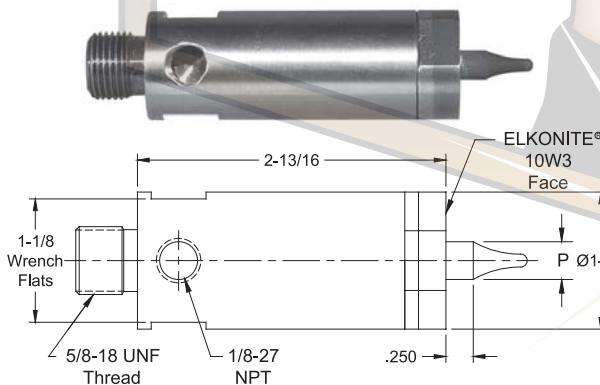


Nut Welding Assemblies	Nut Thread Size	Pin Dia. P	CMW®3 Base	Spring	Ceramic Coated Stainless Steel Pin	ELKONITE® Faced Cap
16-37826-M10	10MM	.423	16-37826	16-950065-01	16-950064-M10	16-37826-CM10
16-37826-M11	11MM	.463	16-37826	16-950065-01	16-950064-M11	16-37826-CM11
16-37826-M12	12MM	.502	16-37826	16-950065-01	16-950064-M12	16-37826-CM12
16-37826-M14	14MM	.581	16-37826	16-950065-01	16-950064-M14	16-37826-CM14



External Electrode Cooling Chamber

Electrode Dia.	Cooling Chamber Part No.	Tapered Adapter Part No.
5/8	18-1340	--
1	18-1342	18-7741
1-1/4	18-1343	18-7742



Tapered Adapter



- Electrode Assemblies 16-37825-XX and 16-37826-XXX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171, shown on page 32

- Electrode Assemblies 16-37825-XX and 16-37826-XXX may be used with Platen Mounted holders (page 61) by using adapter 18-7743 shown on page 31



All dimensions are in inches unless otherwise noted





CHAMELEON/MAX-LIFE™ STUD WELDING ELECTRODES

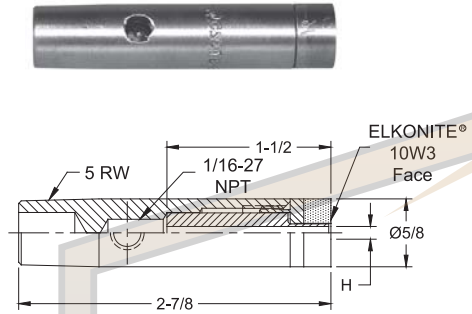


Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW#3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE Faced Cap
16-37325-116	#4	.116	16-37325	16-953116	16-37325-C116
16-37325-132	#5	.132	16-37325	16-953132	16-37325-C132
16-37325-140	#6	.140	16-37325	16-953140	16-37325-C140
16-37325-169	#8	.169	16-37325	16-953169	16-37325-C169
16-37325-169	4MM	.169	16-37325	16-953169	16-37325-C169
16-37325-191	#10	.191	16-37325	16-953191	16-37325-C191
16-37325-204	5MM	.204	16-37325	16-953204	16-37325-C204
16-37325-220	#12	.220	16-37325	16-953220	16-37325-C220
16-37325-243	6MM	.243	16-37325	16-953243S	16-37325-C243
16-37325-254	.250	.254	16-37325	16-953254S	16-37325-C254

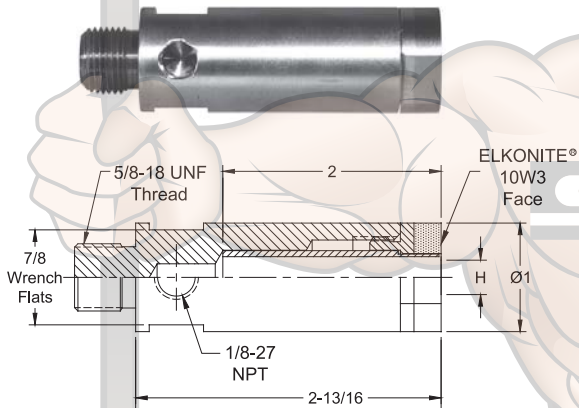

Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW#3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE Faced Cap
16-37525-243	6MM	.243	16-37825	16-953243	16-37525-C243
16-37525-254	.250	.254	16-37825	16-953254	16-37525-C254
16-37525-320	.312	.320	16-37825	16-953320	16-37525-C320
16-37525-320	8MM	.320	16-37825	16-953320	16-37525-C320
16-37525-380	.375	.380	16-37825	16-953380	16-37525-C380

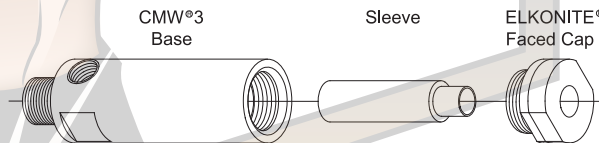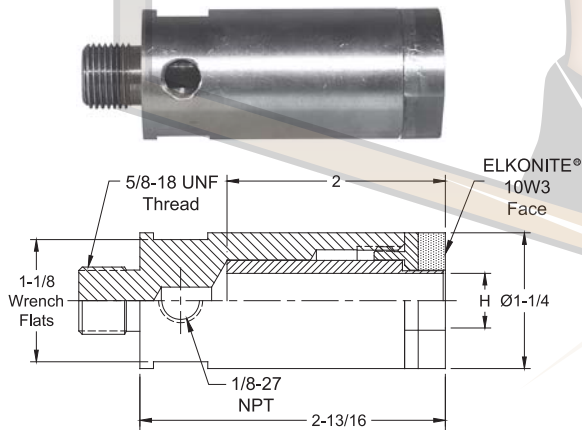


Stud Welding Assemblies	Screw Thread Size	Sleeve I.D. H	CMW#3 Base	Ceramic Coated Stainless Steel Sleeve	ELKONITE Faced Cap
16-37526-399	10MM	.399	16-37526	16-953399	16-37526-C399
16-37526-444	.438	.444	16-37526	16-953444	16-37526-C444
16-37526-477	12MM	.477	16-37526	16-953477	16-37526-C477
16-37526-502	.500	.502	16-37526	16-953502	16-37526-C502
16-37526-630	.625	.630	16-37526	16-953630	16-37526-C630



External Electrode Cooling Chamber

Electrode Dia.	Cooling Chamber Part No.	Tapered Adapter Part No.
5/8	18-1340	--
1	18-1342	18-7741
1-1/4	18-1343	18-7742



Tapered Adapter


- Electrode Assemblies 16-37525-XXX and 16-37526-XXX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171, shown on page 32

- Electrode Assemblies 16-37525-XXX and 16-37526-XXX may be used with Platen Mounted holders (page 61) by using adapter 18-7743 shown on page 31

SELF-PILOTING NUT WELDING ELECTRODES



PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3764-04	5 RW	.082	#4	.093
16-3764-05		.093	#5	
16-3764-06		.100	#6	
16-3764-M3.5		.107	3.5 MM	
16-3764-M4	5 RW	.123	4.0 MM	.156
16-3764-08		.129	#8	
16-3764-10		.143	#10	
16-3764-M5		.156	5.0 MM	




FEATURES AND SPECIFICATIONS


- ELKONITE®10W3 faced CMW® 3 material
- Insulated pin made of anodized aluminum
- Pins are treated to 55 HRC for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes




PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3765-12	5 RW	.166	#12	.375
16-3765-M6		.189	6.0 MM	
16-3765-25		.192	1/4	
16-3765-M7	5 RW	.223	7.0 MM	.375
16-3765-M8		.252	8.0 MM	
16-3765-31		.257	5/16	
16-3765-M9		.291	9.0 MM	



TYPICAL SET-UP FOR SELF PILOTING NUTS

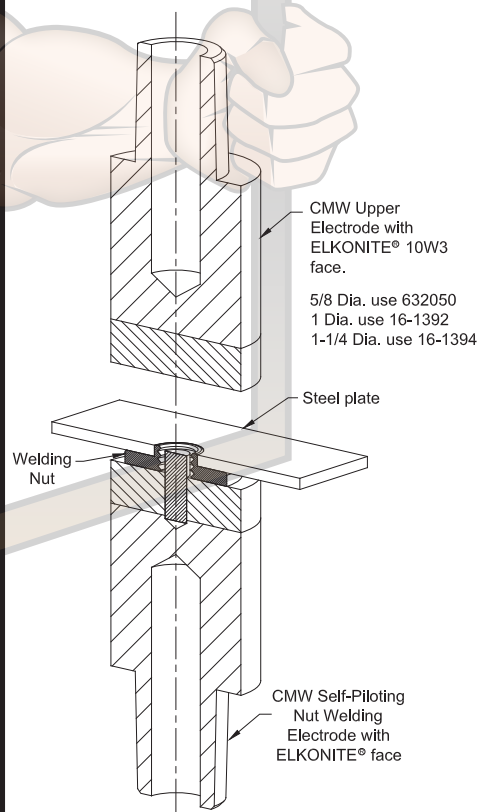

PART No.	Taper Size	Pin Dia. N	For Nut Thread Size	Pin Length L
16-3766-38	5 RW	.306	3/8	.375
16-3766-M10		.320	10 MM	
16-3766-M11		.359	11 MM	
16-3766-44	5 RW	.361	7/16	.375
16-3766-M12		.388	12 MM	
16-3766-50		.415	1/2	
16-3766-M14		.455	14 MM	




- See page 6 for Metric conversions
- See page 7 for Taper dimensions

NON-PILOTING NUT WELDING ELECTRODES




PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3774-04		.082		.142	#4	16-950001-04
16-3774-05		.093		.158	#5	16-950001-05
16-3774-06		.100		.173	#6	16-950001-06
16-3774-08	5RW	.129	.312	.198	#8	16-950001-08
16-3774-10		.143		.220	#10	16-950001-10
16-3774-M6		.186		.250	6MM	16-950001-M6

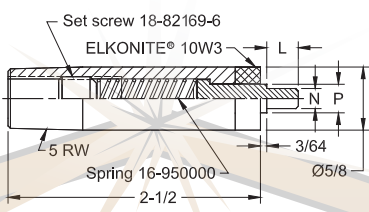


FEATURES AND SPECIFICATIONS



- ELKONITE® 10W3 faced CMW® 3 material
- Insulated pin made of anodized aluminum
- Insulated pins are treated to 55 HRC for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes
- Accepts external cooling chambers




PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3775-12		.166		.250	#12	16-950001-12
16-3775-M6		.186		.250	6MM	16-950001-M6
16-3775-25		.192		.283	1/4	16-950001-25
16-3775-M8	5RW	.252	.312	.283	8MM	16-950001-M8
16-3775-31		.257		.345	5/16	16-950001-31
16-3775-M10		.322		.347	10MM	16-950001-M10

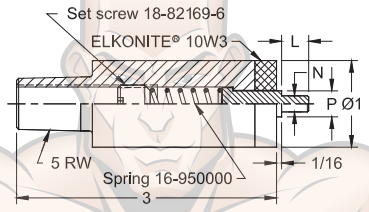


TYPICAL SET-UP FOR NON PILOTING NUTS

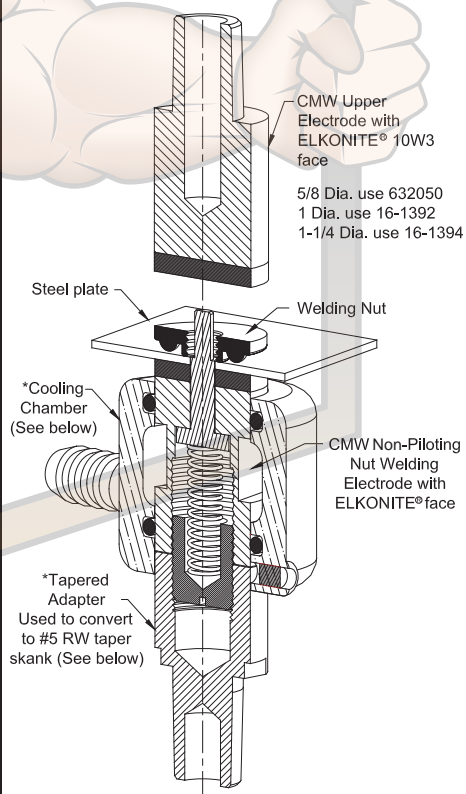

PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3785-12	5/8-18	.166	.375	.250	#12	16-950002-12
16-3785-M6		.186		.269	6MM	16-950002-M6
16-3785-25		.192		.283	1/4	16-950002-25
16-3785-M8	5/8-18	.252	.375	.348	8MM	16-950002-M8
16-3785-31		.257		.345	5/16	16-950002-31
16-3785-M10		.320		.427	10MM	16-950002-M10
16-3785-M11	5/8-18	.359	.375	.466	11MM	16-950002-M11
16-3785-M12		.388		.470	12MM	16-950002-M12

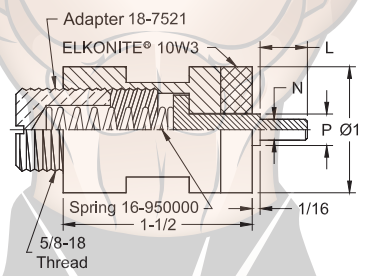

PART No.	Taper or Thd. Size	Pin Dia. N	Pilot Length L	Pilot Dia. P	For Nut Thd. Size N	Pin Part No.
16-3786-12	5/8-18	.166	.375	.250	#12	16-950002-12
16-3786-M6		.186		.269	6MM	16-950002-M6
16-3786-25		.192		.283	1/4	16-950002-25
16-3786-M8	5/8-18	.252	.375	.348	8MM	16-950002-M8
16-3786-31		.257		.345	5/16	16-950002-31
16-3786-38		.306		.408	3/8	16-950002-38
16-3786-M10	5/8-18	.320	.375	.427	10MM	16-950002-M10
16-3786-M11		.359		.466	11MM	16-950002-M11
16-3786-44		.361		.470	7/16	16-950002-44
16-3786-M12	5/8-18	.388	.375	.470	12MM	16-950002-M12
16-3786-50		.415		.533	1/2	16-950002-50

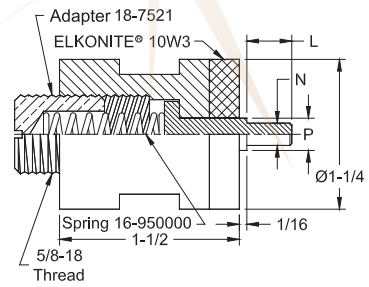

*For additional information on cooling chamber and tapered adapter see page 27

Electrode assemblies 18-3785-XX and 18-3786-XX may be used with 5/8-18 threaded holders 18-169, 18-170, 18-171


FEATURES AND SPECIFICATIONS

- Cooling Chamber recommended for additional cooling capacity on internally cooled applications
- Cooling Chamber is designed to provide supplementary cooling in special, hard to cool applications




- Securely sealed and locked in position with allen head set screw
- Tapered Adapter converts 5/8-18 thread to 5 RW tapers
- Use with Stud/Nut welding applications

WELDING ELECTRODE ACCESSORIES



TAPERED ADAPTER CONVERSION FROM 5/8-18 THREAD TO 5 RW TAPER

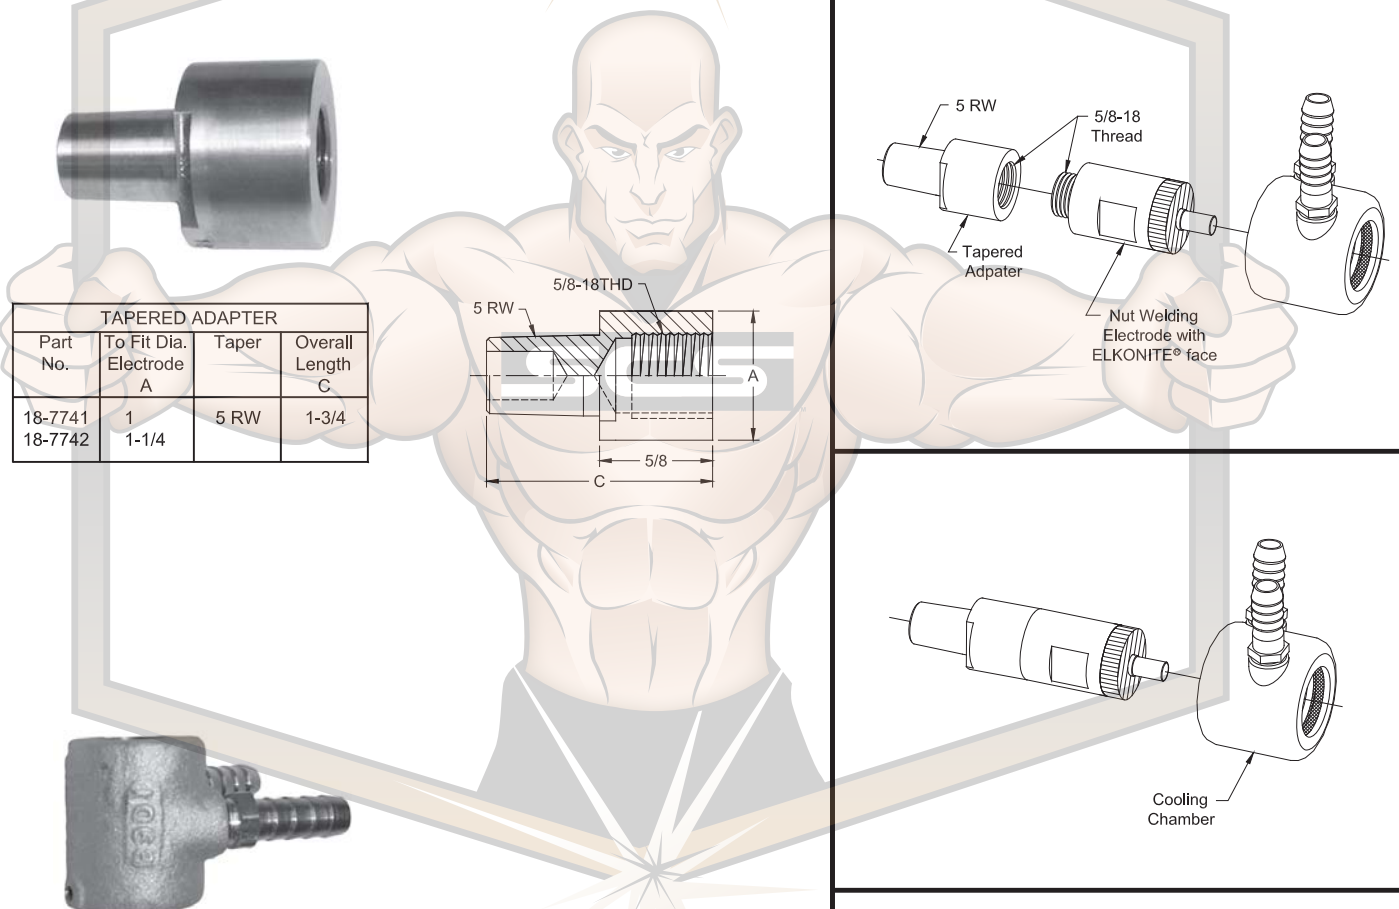

TAPERED ADAPTER			
Part No.	To Fit Dia. Electrode A	Taper	Overall Length C
18-7741	1	5 RW	1-3/4
18-7742	1-1/4	5 RW	1-3/4

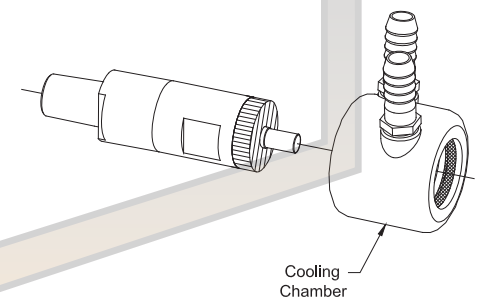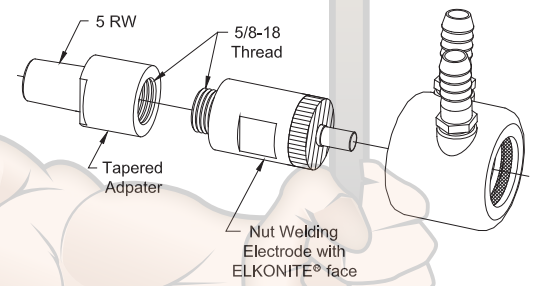

COOLING CHAMBER			
Part No.	To Fit Dia. Electrode A	O.D. B	Overall Length C
18-1340	5/8	1-1/4	1-1/2
18-1341	7/8	1-1/2	1-1/2
18-1342	1	1-3/4	1-1/2
18-1343	1-1/4	2	1-7/8




ASSEMBLED CONVERSION

STUD WELDING ELECTRODES



Assembled Electrode Part Number			Insulation I.D. H	Screw Thread Size
Depth B				
.375	.750	1.125	.116	#4
16-3724-1161	16-3724-1162	16-3724-1163		
16-3724-1321	16-3724-1322	16-3724-1323	.132	#5
.500	1.000	1.500	.140	#6
16-3724-1401	16-3724-1402	16-3724-1403		
16-3724-1501	16-3724-1502	16-3724-1503	.150	--
16-3724-1571	16-3724-1572	16-3724-1573	.157	--
16-3724-1691	16-3724-1692	16-3724-1693	.169	#8
.750	1.500	--	.191	#10
16-3724-1911	16-3724-1912	16-3724-2201		
16-3724-2201	16-3724-2202	16-3724-2541	.220	#12
16-3724-2541	16-3724-2542		.254	.250




FEATURES AND SPECIFICATIONS



- ELKONITE® 10W3 faced CMW®3 material
- Insulated sleeve made of anodized aluminum
- Insulated sleeve are treated to 55 HRC both I.D. & O.D. for wear resistance
- Use with tapered electrode holders
- Use with flat faced electrodes
- Accepts external Cooling Chambers




Assembled Electrode Part Number		Insulation I.D. H	Screw Thread Size
Depth B			
.750	1.500	.254	.250
16-3725-2541	16-3725-2542		
1.000	2.000	.277	.312
16-3725-2771	16-3725-2772		
16-3725-3171	16-3725-3172	.317 (8MM)	--
16-3725-3391	16-3725-3392	.339	--
16-3725-3651	16-3725-3652	.365	--
16-3725-3801	16-3725-3802	.380	.375

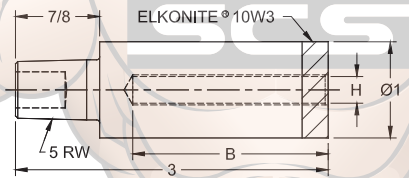

TYPICAL SET-UP FOR STUD WELDING

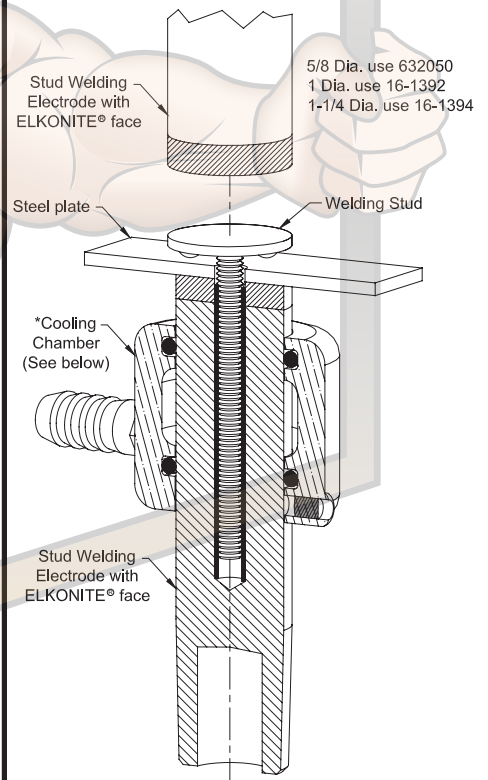

Assembled Electrode Part Number		Insulation I.D. H	Screw Thread Size
Depth B			
1.000	2.000	.401	--
16-3726-4011	16-3726-4012		
16-3726-4271	16-3726-4272	.427	--
16-3726-4441	16-3726-4442	.444	.437
16-3726-5021	16-3726-5022	.502	.500
1.000	2.000	.552	--
16-3726-5521	16-3726-5522		
16-3726-6301	16-3726-6302	.630	.625
16-3726-6761	16-3726-6762	.676	--
16-3726-8011	16-3726-8012	.801	--

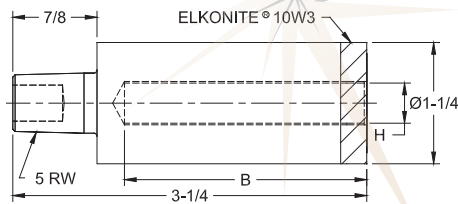

*For additional information on cooling chamber see page 27




Electrode Dia.	Cooling Chamber
5/8	18-1340
1	18-1342
1-1/4	18-1343

SWIVEL HEAD BACK-UP ELECTRODES

PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-2304	4 RW	9/32	7/8	Thru hole with "O" ring
16-2305	5 RW	3/8		
16-2302	4 RW	9/32	1	
16-2303	5 RW	3/8		
16-2300	4 RW	9/32	1-1/4	
16-2301	5 RW	3/8		
16-2306	5 RW	3/8	1-1/2	

PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-2314	4 RW	9/32	7/8	Blind hole
16-2315	5 RW	3/8		
16-2312	4 RW	9/32	1	
16-2313	5 RW	3/8		
16-2310	4 RW	9/32	1-1/4	
16-2311	5 RW	3/8		
16-2316	5 RW	3/8	1-1/2	

PART No.	Taper D	Water Hole Dia. F	Face Dia. H	Type
16-23129	4 RW	9/32	1	Blind hole with spring and ball
16-23139	5 RW	3/8		
16-23109	4 RW	9/32	1-1/4	
16-23119	5 RW	3/8		
16-23169	4 RW	9/32	1-1/2	
16-23179	5 RW	3/8		

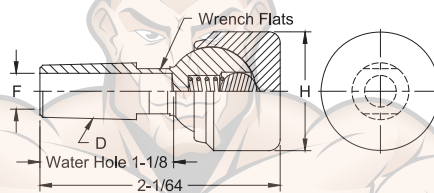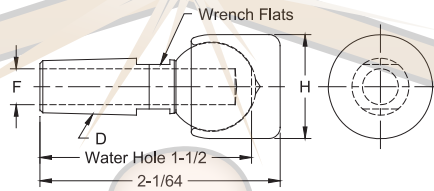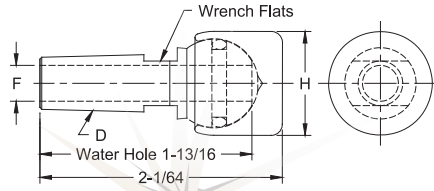

Standard material: Shank - CMW®3
 Cap - CMW®3
 Optional material available on special order:
 Cap-CMW®100, ELKONITE® & ELKON® facing







LARGE DIAMETER FLAT FACED BACK-UP ELECTRODES

PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-3012	CMW®3	1-1/4	4 RW	9/32	7/8	3/4
16-3010						1
16-3030						1-1/4

PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-3021	CMW®3	1-1/2	5 RW	3/8	1-1/8	7/8
16-3020						1
16-3040						1-1/4
16-3050						1-1/2


PART No.	Weld Face Material	O.A.L. C	Taper D	Water Hole		Weld Face Dia. H
				Dia. F	Depth G	
16-1392	ELKONITE® 10W3	2	5 RW	3/8	1-1/2	1
16-1393						5/8
16-1394						1-1/2
16-1395						5/8
16-1395						1-1/4

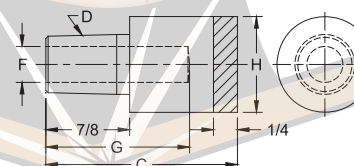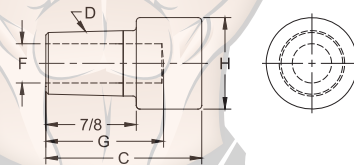

SQUARE & RECTANGULAR FACED BACK-UP ELECTRODES


PART No.	Weld Face Material	O.A.L. C	Taper D	Shank Length E	Water Hole Dia. F	Weld Face Lgth. A	Weld Face Width B
16-382158	CMW®3 Casting	1-5/8	4 RW	7/8	9/32	1-1/2	1/2
16-3111						2	5/8
16-382160						1-1/2	1/2
16-3121						2	5/8

PART No.	Weld Face Material	O.A.L. C	Taper D	Shank Length E	Water Hole Dia. F	Weld Face Lgth. A	Weld Face Width B
16-3110	CMW®3	1-1/2	4 RW	13/16	9/32	1/2	1/2
16-3120	Cold Formed	1-3/4	5 RW	7/8	3/8	5/8	5/8
16-384110	Formed	1-5/8	5 RW	7/8	3/8	15/16	1/2

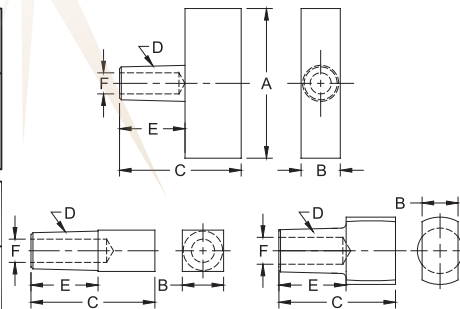


Other tapers and alloys available to special order

THREADED ELECTRODES




FEMALE FLAT




FEMALE TRUNCATED

CMW®3 FEMALE THREADED ELECTRODES											
CMW®3 PART No.	Type	O.A.L. C	Thread D	Major Dia. A	Thread Depth E	Water Hole Depth G	Water Hole Dia. F	Over Wrench Flats	Wrench Flat Length K	Welding Face Dia. H	
336508	Female Flat	2	5/8-18	1	3/4	1-1/4	37/64	7/8	3/4	1	
336510				1-1/4	3/4			1-1/4	1	3/4	1-1/4
336512				1-1/2	7/8			1-1/2	1-1/4	7/8	1-1/2
326508	Female Truncat.	2	5/8-18	1	3/4	1-1/4	37/64	7/8	3/4	3/8	
326510				1-1/4	3/4			1-1/4	1	3/4	1/2
326512				1-1/2	7/8			1-1/2	1-1/4	7/8	5/8




MALE FLAT




MALE TRUNCATED


CMW®3 MALE THREADED ELECTRODES										
CMW®3 PART No.	Type	O.A.L. C	Thread D	Major Dia. A	Thread Depth E	Water Hole Depth G	Water Hole Dia. F	Over Wrench Flats	Wrench Flat Length K	Welding Face Dia. H
330507	Male Flat	2	5/8-18	7/8	9/16	1-1/4	5/16	3/4	5/8	7/8
330508			5/8-18	1	9/16		5/16	7/8	5/8	1
335506			5/8-11	3/4	15/32		5/16	5/8	1/2	3/4
335507			5/8-11	7/8	15/32		5/16	3/4	3/4	7/8
335508			3/4-10	1	5/8		3/8	7/8	7/8	1
335510			3/4-10	1-1/4	5/8		3/8	1	3/4	1-1/4
335512	7/8-9	1-1/2	3/4	1/2	1-1/4	7/8	1-1/2			
325506	Male Truncat.	2	5/8-11	3/4	15/32	1-1/4	5/16	5/8	1/2	1/4
325507			5/8-11	7/8	15/32		5/16	3/4	5/8	5/16
325508			3/4-10	1	5/8		3/8	7/8	5/8	3/8
325510			3/4-10	1-1/4	5/8		3/8	1	3/4	1/2



ELKONITE® FACED FEMALE FLAT



ELKONITE® FACED FEMALE CENTERED




ELKONITE® FACED MALE CENTERED


ELKONITE® FACED MALE & FEMALE THREADED ELECTRODES											
ELKONITE® 10W3 PART No.	Type	O.A.L. C	Thread D	Major Dia. A	Thread Depth E	Water Hole Depth G	Water Hole Dia. F	Over Wrench Flats	Wrench Flat Length K	Welding Face Dia. H	ELKONITE® Thickness B
636308	Female Flat	1-1/2	5/8-18	1	3/4	1	37/64	7/8	1/2	1	1/4
636310				1-1/4	3/4			1	1/2	1-1/4	
636312				1-1/2	7/8			1-1/2	1-1/4	7/8	
626308	Female Centered	1-1/2	5/8-18	1	3/4	1	37/64	7/8	13/16	5/8	1/4
626310				1-1/4	3/4			1	11/16	5/8	
620307	Male Centered	1-1/2	5/8-18	7/8	9/16	1	5/16	3/4	3/4	1/2	1/4
625206		1-1/4	5/8-11	3/4	15/32	7/8	5/16	5/8	3/4	1/2	3/16
625308		1-5/8	3/4-10	1	5/8	1-3/16	3/8	7/8	7/8	5/8	1/4




FEMALE FLAT

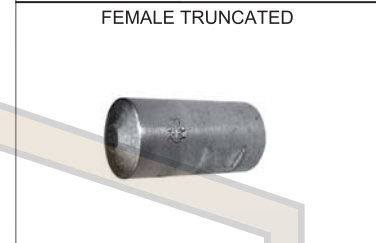

FEMALE TRUNCATED

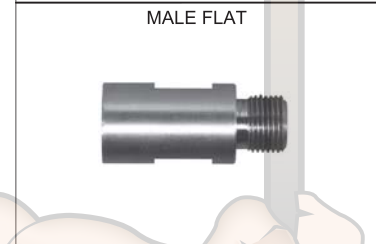

MALE FLAT

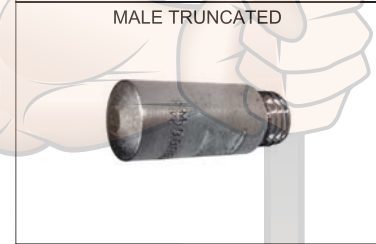

MALE TRUNCATED



ELKONITE® FACED FEMALE FLAT




ELKONITE® FACED FEMALE CENTERED




ELKONITE® FACED MALE CENTERED

ADAPTERS

MALE TAPER TO FEMALE TAPER ADAPTERS								
Adapter Part No.	Male Taper			Female Taper		Length Under Head M	Hex. Over Flats H	Overall Length C
	Size L	Minor Dia. J	Dia. at 1/2 K	Size D	Major Dia. A			
18-741	5 RW	.588	.613	4 RW	.463	7/8	7/8	1-3/16
18-742	7 RW	.819	.844	5 RW	.625	1-3/16	1	1-1/2
18-7414	6 RW	.706	.731	5 RW	.625	7/8	1	1-3/16
18-7415	4 RW	.438	.463	5 RW	.625	5/8	7/8	1-3/4
18-7416	5 RW	.588	.613	6 RW	.750	7/8	1	2-1/4





MALE PIPE THREAD TO FEMALE TAPER ADAPTERS						
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Head M	Hex. Over. Flats H	Overall Length C
		Size D	Major Dia. A			
18-746-07	1/2-14 pipe	4 RW	.463	5/8	1	7/8
18-747-07	1/2-14 pipe	5 RW	.625	5/8	1	7/8
18-7465-07	1/2-14 pipe	5 RW Male Cap	.414	9/16	7/8	7/8
18-748-06	5/8-14 pipe	4 RW	.463	9/16	1	3/4
18-749-06	5/8-14 pipe	5 RW	.625	9/16	1	3/4
18-756-09	3/4-14 pipe	4 RW	.463	7/8	1-1/4	1-1/8
18-757-09	3/4-14 pipe	5 RW	.625	7/8	1-1/4	1-1/8
18-7576-09	3/4-14 pipe	6 RW	.750	7/8	1-1/4	1-1/8




*Adapters of longer lengths available in 1/8" increments upon request

MALE THREAD TO FEMALE TAPER ADAPTERS							
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Head M	Hex or Dia. Over. Flats H	Overall Length C	Sealing Ring Part No.
		Size D	Major Dia. A				
18-750	5/8-18	4 RW	.463	9/16	7/8 Hex	13/16	18-10060-11
18-751	5/8-18	5 RW	.625	9/16	1 Hex	1-11/16	18-10060-11
18-755*	3/4-10	5 RW	.625	9/16	1 Dia.	1-9/16	18-10060-12
18-770	7/8-14	4 RW	.463	5/8	1 Hex	13/16	18-76460
18-771	7/8-14	5 RW	.625	5/8	1 Hex	13/16	18-76460
18-7743	1-14	5/8-18 Thd.	-	5/8	1-1/4 Hex	1	18-10060-17
18-785	1-14	4 RW	.463	9/16	1-1/4 Hex	13/16	18-10060-17
18-786	1-14	5 RW	.625	9/16	1-1/4 Hex	13/16	18-10060-17
18-7863	1-14	6 RW	.750	3/4	1-1/4 Hex	1-3/4	18-10060-17
18-787	1-14	7 RW	.875	3/4	1-1/4 Hex	2-1/8	18-10060-17
18-7875	1-14	5 RW	.625	9/16	1-1/4 Dia.	11/16	18-10060-17
18-7876	1-14	6 RW	.750	5/8	1-1/4 Dia.	7/8	18-10060-17



*This part has 3/4" wrench flats


FEMALE THREAD TO FEMALE TAPER ADAPTERS						
Adapter Part No.	Female Thd. Size L	Female Taper		Outside Dia. B	Over Wrench Flats H	Overall Length C
		Size D	Major Dia. A			
18-753	5/8-18	4 RW	.475	1	3/4	1-5/8
18-754	5/8-18	5 RW	.625	1	3/4	1-5/8
18-7591	3/4-10	4 RW	.463	1-1/4 Hex.	1-1/4	1-3/4
18-7592	3/4-10	5 RW	.625	1-1/4 Hex.	1-1/4	1-3/4

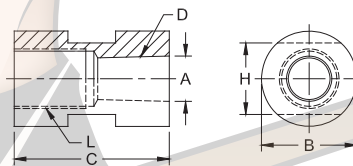



See page 6 for Metric Conversions
See page 7 for Taper Dimensions
See page 34 for ejector type adapters

CONVERSION FROM 5/8-18 THREAD INTO 4, 5, 6, RW TAPER



Part No. 18-752




Threaded adapter used with tapered adapter to convert holder to use tapered electrodes.



CONVERSION FROM THREADED ADAPTER INTO 4, 5, 6, RW TAPER




Part No. 18-82650

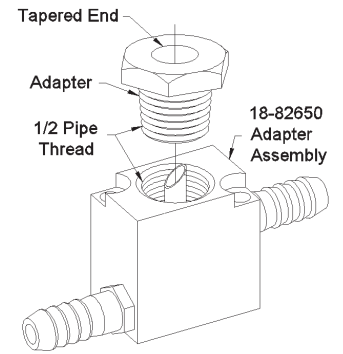




100 SERIES (NON-EJECTOR) WATER COOLED ELECTRODE HOLDER

100 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-101	.463	3/4	3	4 RW	1/2
18-102		7/8			
18-103		1			
18-104		1-1/4			
18-106	.625	1	8	5 RW	3/4
18-107		1-1/4			
18-108		1-1/2			
18-111	.463	3/4	12	4 RW	1/2
18-112		7/8			
18-113		1			
18-114		1-1/4			
18-116	.625	1	8	5 RW	3/4
18-117		1-1/4			
18-118		1-1/2			
18-119	.875	1-1/4	12	7 RW	1-1/8
18-120	1-1/2				
18-131	.463	3/4	12	4 RW	1/2
18-132		7/8			
18-133		1			
18-134		1-1/4			
18-136	.625	1	12	5 RW	3/4
18-137		1-1/4			
18-138		1-1/2			

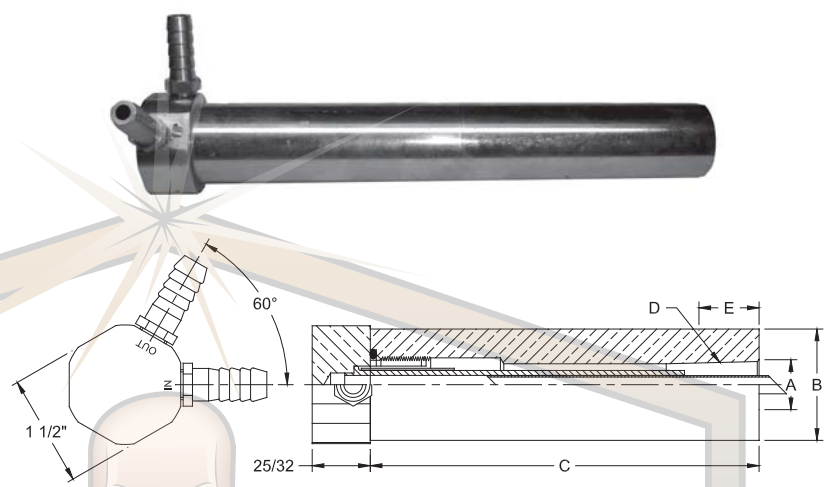



100 SERIES THREADED HOLDER					
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Electrode E	
18-169	1	8	5/8-18	9/16	
18-170					1-1/4
18-171					1-1/2
18-172	1	8	7/8-14	9/16	
18-173					1-1/4
18-174					1-1/2
18-175	1-1/4	8	1-14	3/4	
18-176	1-1/2				

See available adapters in table below.




ADAPTERS USED WITH THREADED HOLDERS

100 SERIES THREADED HOLDER ADAPTERS					
Holder Assembly No.		Adapter Part No.	Page No.	Attachment Description	
18-169	Use with	18-750	31	4 RW Female	May also be used with universal Adapters having 7/8-14 Male thread See page 46
18-170		18-751	31	5 RW Female	
18-171		18-752	31	5/8-18 M. Thread	
18-171		18-811	48	#1 Size Nu-Twist®	
18-172	Use with	18-770	31	4 RW Female	May also be used with universal Adapters having 1-14 Male thread See page 46
18-173		18-771	31	5 RW Female	
18-174					
18-175	Use with	18-785	31	4 RW Female	May also be used with universal Adapters having 1-14 Male thread See page 46
18-176		18-786	31	5 RW Female	
18-176		18-7863	31	6 RW Female	
18-176		18-787	31	7 RW Female	
18-176		18-812	48	#2 Size Nu-Twist®	

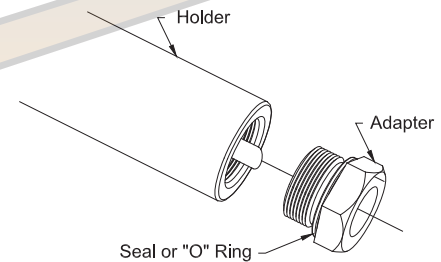

100 SERIES (NON-EJECTOR) WATER COOLED ELECTRODE HOLDER

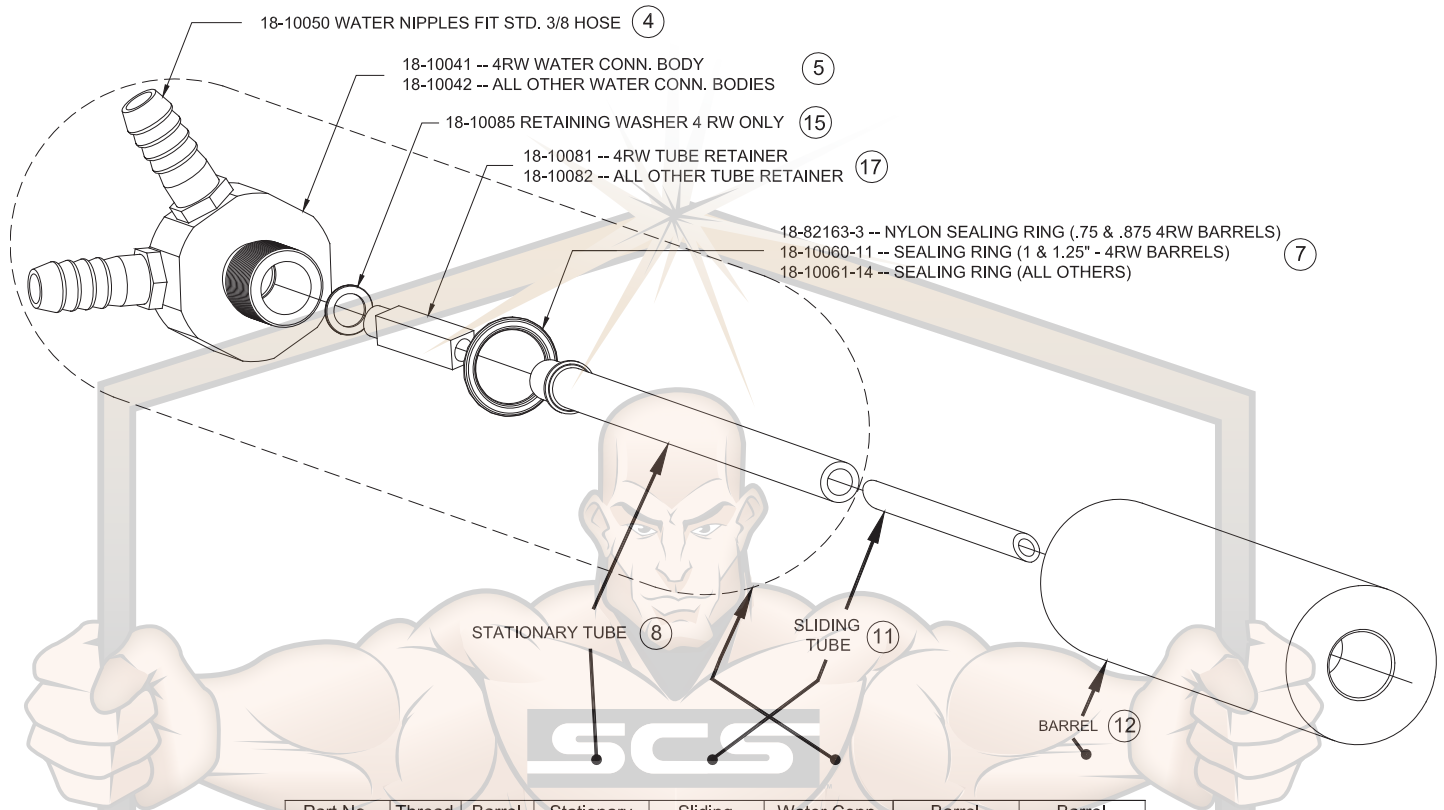

Part No. Holder Assy.	Thread Or Taper	Barrel Length	Stationary Tube 8	Sliding Tube 11	Water Conn. HD. Sub-Assy. Include Parts: 4 5 7 8 15 17	Barrel Diameter	Barrel 12
18-101 18-102 18-103 18-104	4 RW	3	18-10044-3	18-10046-3	18-10091-3	3/4 7/8 1 1-1/4	18-11110-3 18-11210-3 18-11310-3 18-11410-3
18-106 18-107 18-108	5 RW	3	18-10045-3	18-10047-3	18-10092-3	1 1-1/4 1-1/2	18-11610-3 18-11710-3 18-11810-3
18-111 18-112 18-113 18-114	4 RW	8	18-10044-8	18-10046-8	18-10091-8	3/4 7/8 1 1-1/4	18-11110-8 18-11210-8 18-11310-8 18-11410-8
18-116 18-117 18-118	5 RW	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-11610-8 18-11710-8 18-11810-8
18-119 18-120	7 RW	8	18-10045-8	18-10047-8	18-10092-8	1-1/4 1-1/2	18-11910-8 18-12010-8
18-131 18-132 18-133 18-134	4 RW	12	18-10044-12	18-10046-8	18-10091-12	3/4 7/8 1 1-1/4	18-11110-12 18-11210-12 18-11310-12 18-11410-12
18-136 18-137 18-138	5 RW	12	18-10045-12	18-10047-8	18-10092-12	1 1-1/4 1-1/2	18-11610-12 18-11710-12 18-11810-12
18-169 18-170 18-171	5/8-18	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-16910-8 18-17010-8 18-17110-8
18-172 18-173 18-174	7/8-14	8	18-10045-8	18-10047-8	18-10092-8	1 1-1/4 1-1/2	18-17210-8 18-17310-8 18-17410-8
18-175 18-176	1-14	8	18-10045-8	18-10047-8	18-10092-8	1-1/4 1-1/2	18-17510-8 18-17610-8



SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

200 SERIES (EJECTOR) WATER COOLED ELECTRODE HOLDER

200 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-201	.463	3/4	3	4 RW	1/2
18-202		7/8			
18-203		1			
18-204		1-1/4			
18-206	.625	1	5 RW	3/4	3/4
18-207		1-1/4			
18-208		1-1/2			
18-211	.463	3/4	8	4 RW	1/2
18-212		7/8			
18-213		1			
18-214		1-1/4			
18-216	.625	1	5 RW	3/4	3/4
18-217		1-1/4			
18-218		1-1/2			
18-219*	.875	1-1/4	7 RW	1-1/8	1-1/8
18-220*		1-1/2			
18-231	.463	3/4	12	4 RW	1/2
18-232		7/8			
18-233		1			
18-234		1-1/4			
18-236	.625	1	5 RW	3/4	3/4
18-237		1-1/4			
18-238		1-1/2			
18-236-18	.625	1	18	5 RW	3/4
18-237-18		1-1/4			
18-238-18		1-1/2			

*Must use knockout adapter 18-20033

200 SERIES THREADED HOLDER				
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Elect. E
18-272	1	8	7/8-14	9/16
18-273	1-1/4			
18-274	1-1/2			
18-275	1-1/4	1-14	1-14	3/4
18-276	1-1/2			

200 Series Threaded Holder can use Male Threaded to Female Taper Universal Adapters on page 46.

EJECTOR TYPE ADAPTERS

EJECTOR TYPE ADAPTERS 7/8-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia. A					
18-7702	7/8-14	4 RW	.463	5/8	1	13/16	18-76460	18-78501
18-7712	7/8-14	5 RW	.625	1/2	1	1-1/16	18-76460	18-7712-3








Use with Threaded Ejector Holder to make Replaceable Taper Holders

Part No.	Female Thd. Size	Barrel Dia.
18-272	7/8-14	1
18-273	7/8-14	1-1/4
18-274	7/8-14	1-1/2


EJECTOR TYPE ADAPTERS 1-14 THREAD								
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats H	Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia. A					
18-7852	1-14	4 RW	.463	9/16	1-1/4	13/16	18-10060-17	18-78501
18-7862	1-14	5 RW	.625	7/16	1-1/4	1-1/16	18-10060-17	18-7712-3
18-7864	1-14	6 RW	.750	3/4	1-1/4	1-3/4	18-10060-17	18-78650
18-7872	1-14	7 RW	.875	3/4	1-1/4	2-1/8	18-10060-17	18-78701

Use with Threaded Ejector Holder to make Replaceable Taper Holders

Part No.	Female Thd. Size	Barrel Dia.
18-275	1-14	1-1/4
18-276	1-14	1-1/2

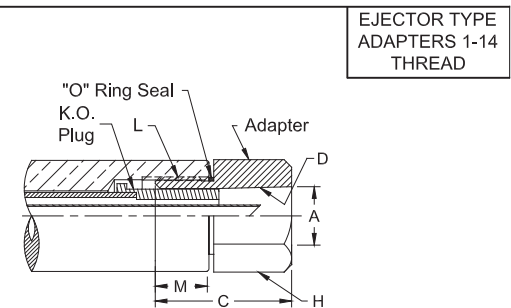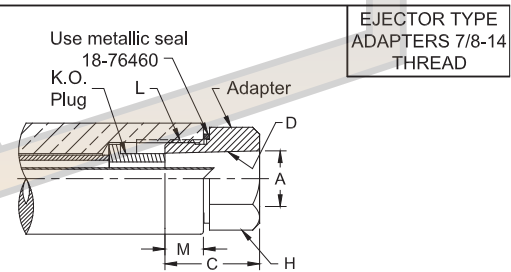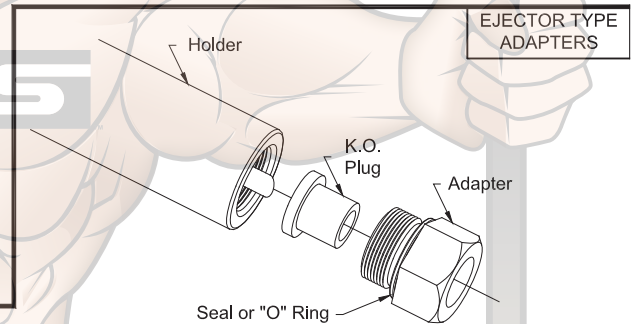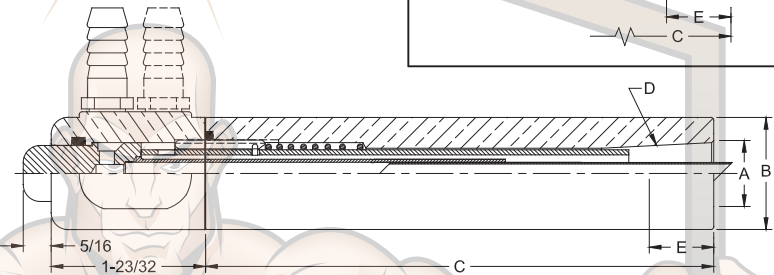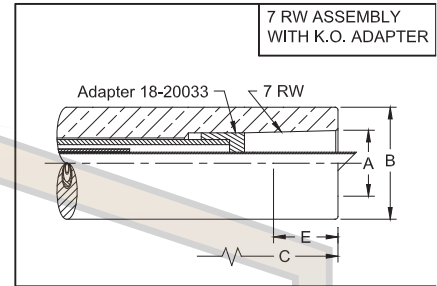

200 SERIES (EJECTOR) WATER COOLED ELECTRODE HOLDER

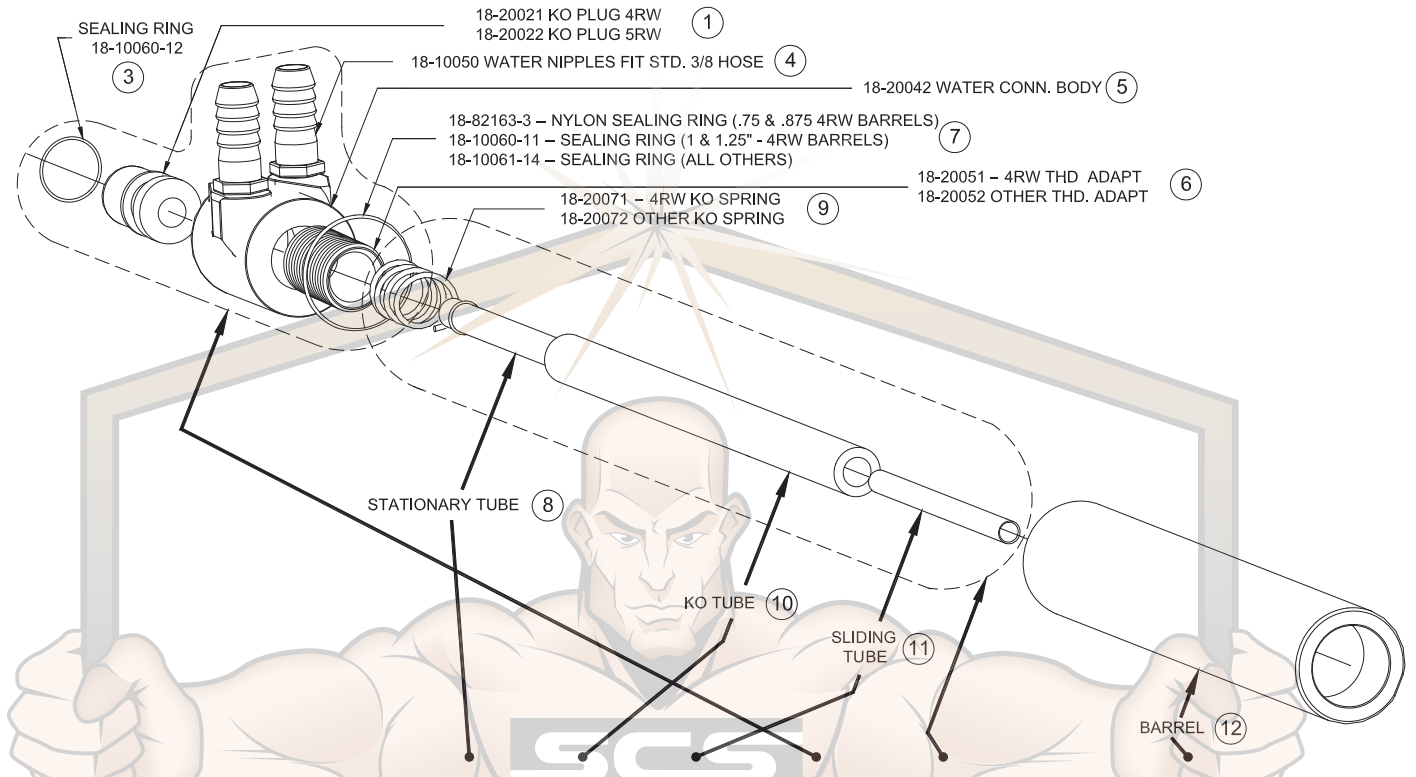

Part No. Holder Assy.	Thread Or Taper	Barrel Length	Stationary Tube	K.O. Tube	Sliding Tube	Water Conn. HD. Sub-Assy. Include Parts: 1 3 4 5 6 7	K.O. Tube Sub-Assy. Include Parts: 8 9 10 11	Barrel Diameter	Barrel
18-201 18-202 18-203 18-204	4 RW	3	18-10044-3	18-20031-3	18-10046-3	18-20091	18-20095-3	3/4 7/8 1 1-1/4	18-11110-3 18-11210-3 18-11310-3 18-11410-3
18-206 18-207 18-208	5 RW	3	18-10045-3	18-20032-3	18-10047-3	18-20092	18-20096-3	1 1-1/4 1-1/2	18-11610-3 18-11710-3 18-11810-3
18-211 18-212 18-213 18-214	4 RW	8	18-10044-8	18-20031-8	18-10046-8	18-20091	18-20095-8	3/4 7/8 1 1-1/4	18-11110-8 18-11210-8 18-11310-8 18-11410-8
18-216 18-217 18-218	5 RW	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4 1-1/2	18-11610-8 18-11710-8 18-11810-8
18-219* 18-220*	7 RW	8	18-10045-8	18-20032-58 & 18-20033*	18-10047-8	18-20092	18-20096-58	1-1/4 1-1/2	18-11910-8 18-12010-8
18-231 18-232 18-233 18-234	4 RW	12	18-10044-12	18-20031-12	18-10046-8	18-20091	18-20095-12	3/4 7/8 1 1-1/4	18-11110-12 18-11210-12 18-11310-12 18-11410-12
18-236 18-237 18-238	5 RW	12	18-10045-12	18-20032-12	18-10047-8	18-20092	18-20096-12	1 1-1/4 1-1/2	18-11610-12 18-11710-12 18-11810-12
18-236-18 18-237-18 18-238-18	5 RW	18	18-10045-12	18-20032-18	18-10047-29	18-20092	18-20096-18	1 1-1/4 1-1/2	18-11610-18 18-11710-18 18-11810-18
18-272 18-273 18-274	7/8-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4 1-1/2	18-17210-8 18-17310-8 18-17410-8
18-275 18-276	1-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-17510-8 18-17610-8

*Must use knockout adapter 18-20033



SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728



300 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDER

CMW Premium holder barrels are made from high strength CMW^{®3} material, centerless ground within .002" tolerance on diameter and nickel plated to resist wear and assure uniform contact resistance of a low magnitude



300 SERIES TAPERED HOLDER					
Part No. Holder Assy.	Major Taper Dia. A	Barrel Dia. B	Barrel Length C	RW Taper D	Engagement With Std. Elect. E
18-317 18-318	.625	1-1/4 1-1/2	8	5 RW	3/4
18-319* 18-320*	.875	1-1/4 1-1/2		7 RW	1-1/8
18-337 18-338	.625	1-1/4 1-1/2	12	5 RW	3/4
18-339* 18-340*	.875	1-1/4 1-1/2		7 RW	1-1/8



*Must use knockout adapter 18-20033

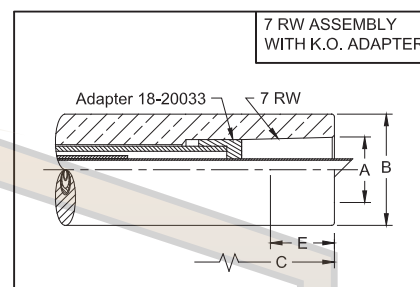

300 SERIES THREADED HOLDER				
Part No. Holder Assy.	Barrel Dia. B	Barrel Length C	Thread Size D	Engagement With Std. Elect. E
18-372 18-373	1-1/4	8	7/8-14	9/16
18-375 18-376	1-1/4 1-1/2		1-14	3/4

300 Series Threaded Holder can use Male Threaded to Female Taper Universal Adapters on page 46.

Note: These threaded holder barrels are the same as on 600 series holders on page 44.

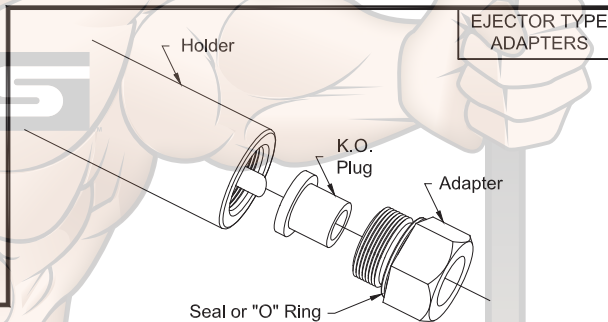


EJECTOR TYPE ADAPTERS

EJECTOR TYPE ADAPTERS 7/8-14 THREAD									
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats		Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia.		H	H			
18-7702	7/8-14	4 RW	.463	5/8	1	13/16	18-76460	18-78501	
18-7712	7/8-14	5 RW	.625	1/2	1	1-1/16	18-76460	18-7712-3	

Use with Threaded Ejector Holder to make Replaceable Taper Holders


Part No.	Female Thd. Size	Barrel Dia.
18-372	7/8-14	1
18-373	7/8-14	1-1/4

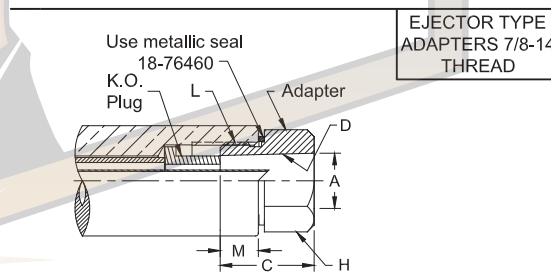


EJECTOR TYPE ADAPTERS 1-14 THREAD									
Adapter Part No.	Male Thd. Size L	Female Taper		Length Under Hd. M	Hex. Over Flats		Overall Length C	Sealing Ring Part No.	K.O. Plug Part No.
		Size D	Major Dia.		H	H			
18-7852	1-14	4 RW	.463	9/16	1-1/4	13/16	18-10060-17	18-78501	
18-7862	1-14	5 RW	.625	7/16	1-1/4	1-1/16	18-10060-17	18-7712-3	
18-7864	1-14	6 RW	.750	3/4	1-1/4	1-3/4	18-10060-17	18-78650	
18-7872	1-14	7 RW	.875	3/4	1-1/4	2-1/8	18-10060-17	18-78701	

Use with Threaded Ejector Holder to make Replaceable Taper Holders

Part No.	Female Thd. Size	Barrel Dia.
18-375	1-14	1-1/4
18-376	1-14	1-1/2

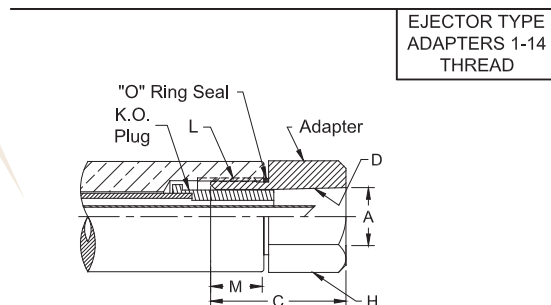

300 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDER

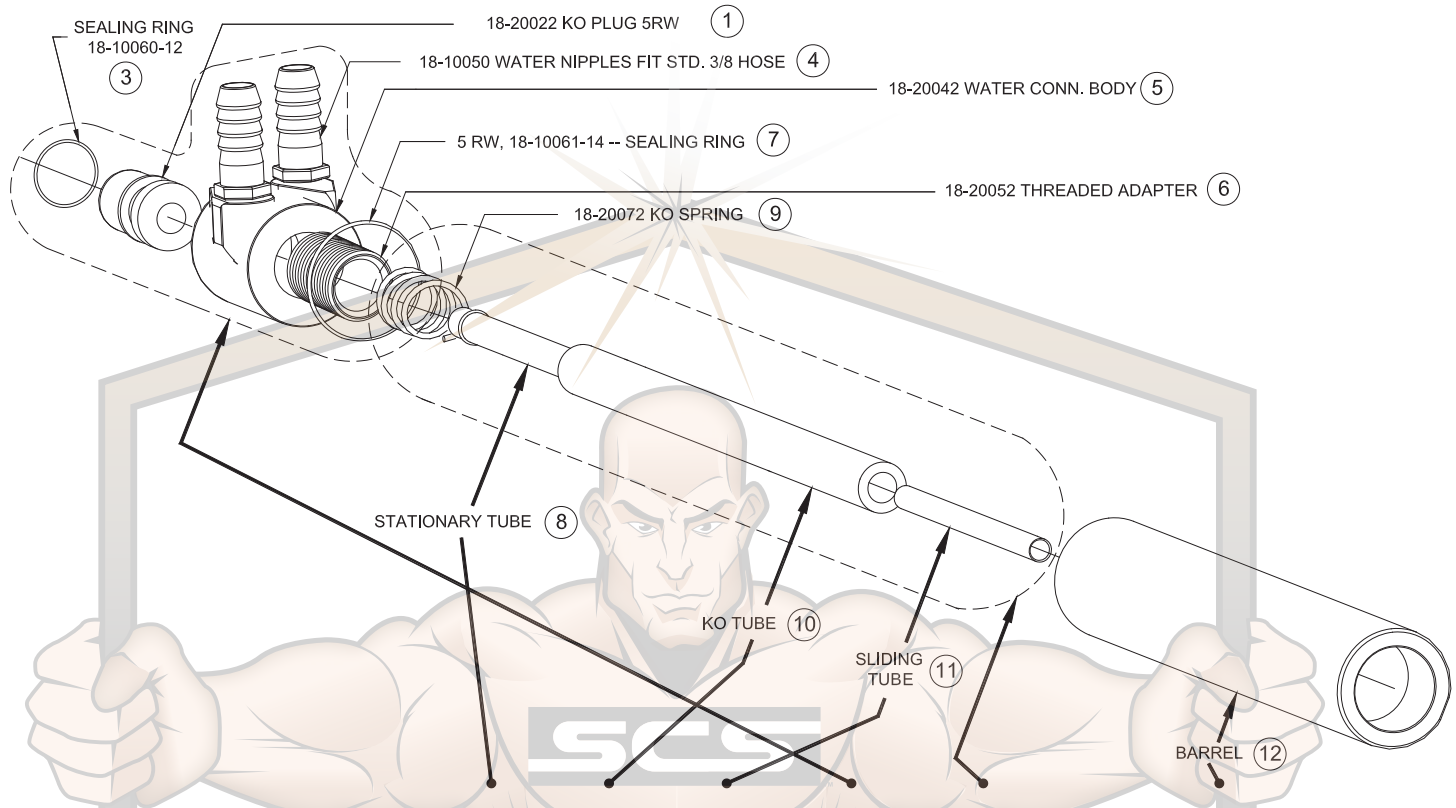

Part No. Holder Assy.	Thread Or Taper	O.A.L	Stationary Tube 8	K.O. Tube 10	Sliding Tube 11	Water Conn. HD. Sub-Assy. Include Parts: 1 3 4 5 6 7	K.O. Tube Sub-Assy Include Parts: 8 9 10 11	Barrel Diameter	Barrel 12
18-317 18-318	5 RW	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-31710-8 18-31810-8
18-319* 18-320*	7 RW	8	18-10045-8	18-20032-58 & 18-20033*	18-10047-8	18-20092	18-20096-58	1-1/4 1-1/2	18-31910-8 18-32010-8
18-337 18-338	5 RW	12	18-10045-12	18-20032-12	18-10047-8	18-20092	18-20096-12	1-1/4 1-1/2	18-31710-12 18-31810-12
18-339* 18-340*	7 RW	12	18-10045-12	18-20032-62 & 18-20033*	18-10047-8	18-20092	18-20096-62	1-1/4 1-1/2	18-31910-12 18-32010-12
18-372 18-373	7/8-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1 1-1/4	18-37210-8 18-37310-8
18-375 18-376	1-14	8	18-10045-8	18-20032-8	18-10047-8	18-20092	18-20096-8	1-1/4 1-1/2	18-37510-8 18-37610-8













*Must use knockout adapter 18-20033




SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

**COMBINATIONS OF CMW
HOLDERS, ADAPTERS AND
ELECTRODES CAN
PERFORM MOST RESISTANCE
WELDING APPLICATIONS**

Many of these combinations make possible welding operations that could have been done heretofore only by the use of "expensive and special" holders and electrodes. A few ideas of the many possible combinations are shown for your guidance.

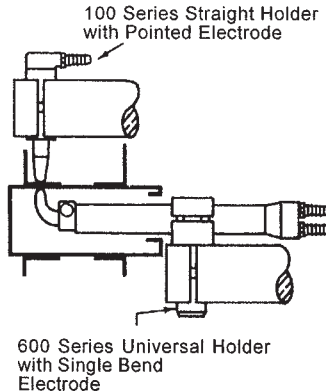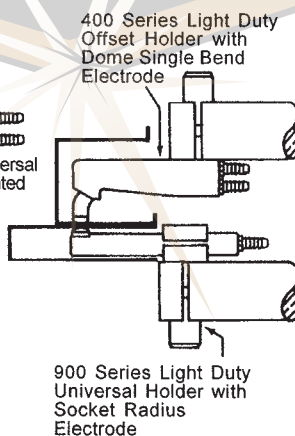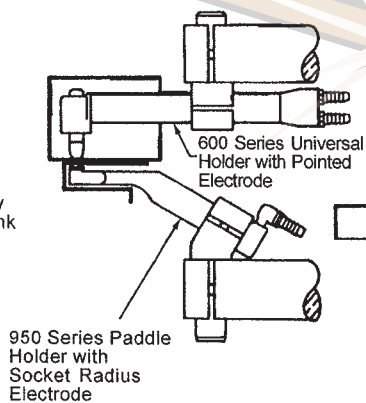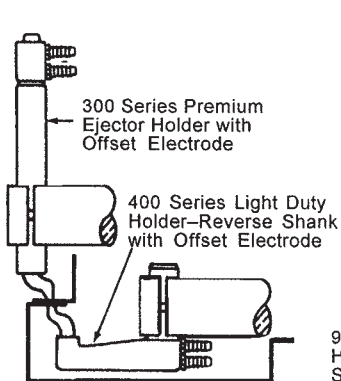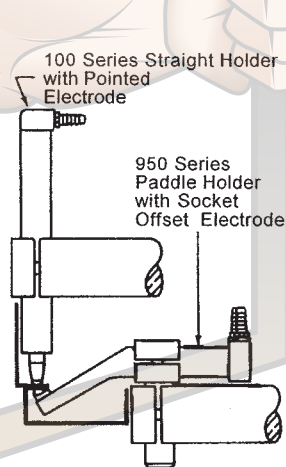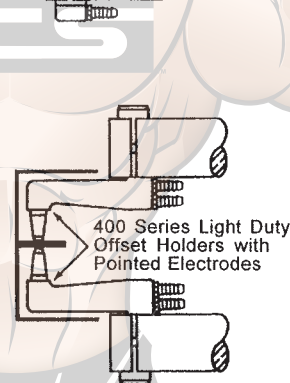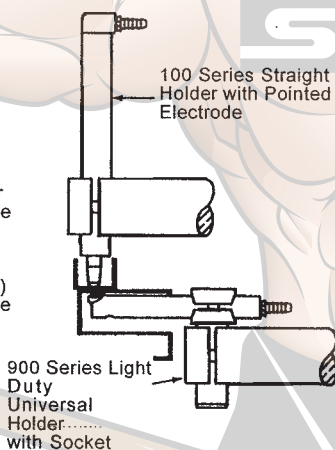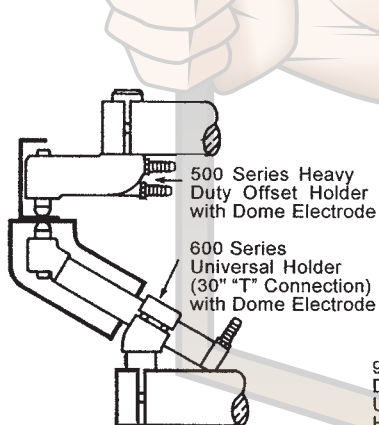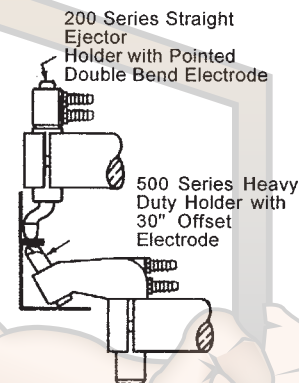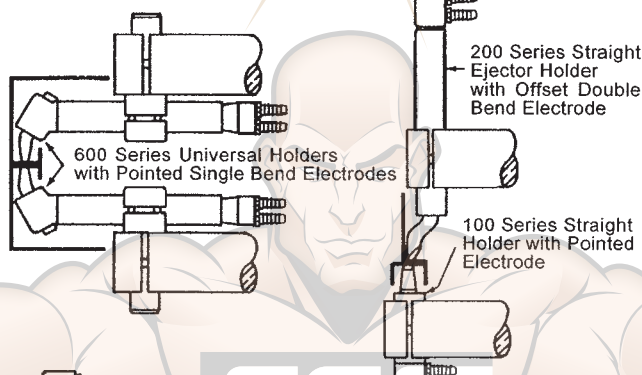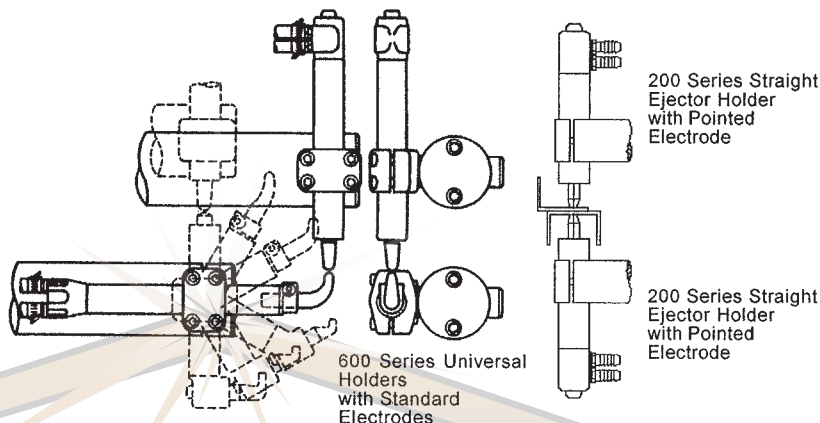


400 SERIES OFFSET (NON-EJECTOR) WATER COOLED ELECTRODE HOLDERS

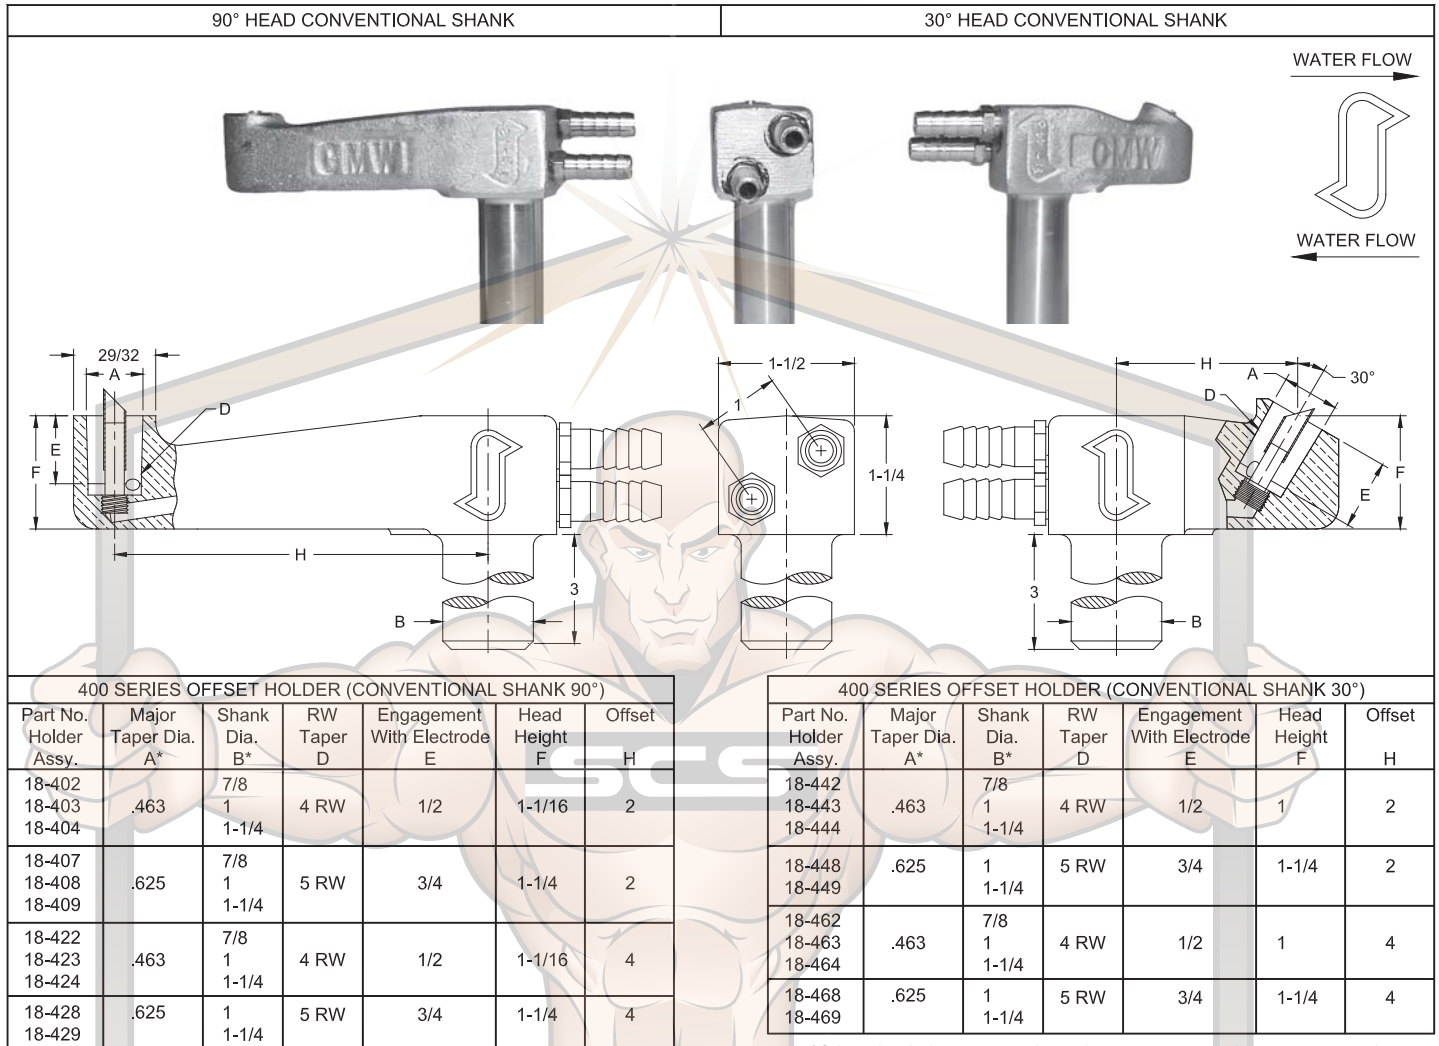

*Other shank diameters and lengths or tapers available on special order

*Other shank diameters and lengths or tapers available on special order

400 SERIES OFFSET (NON-EJECTOR) WATER COOLED ELECTRODE HOLDERS

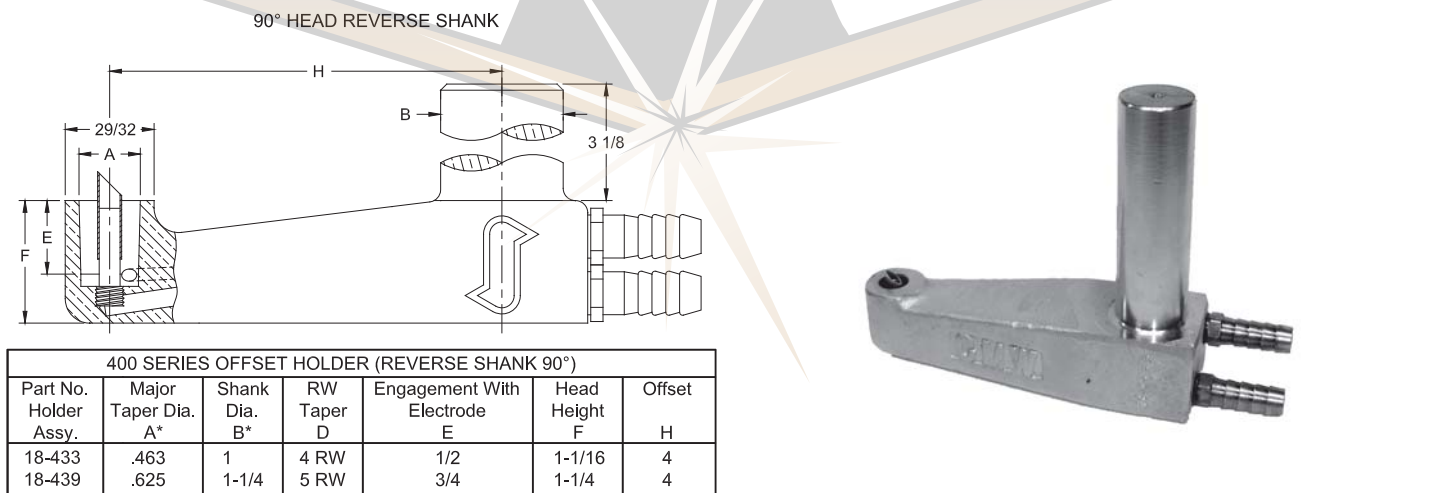


*Other shank diameters and lengths or tapers available on special order

400 SERIES OFFSET (NON-EJECTOR) REPLACEMENT PARTS



SOUTHERN COPPER & SUPPLY
 COMPANY, INC.
 800-289-2728


400 SERIES OFFSET (NON-EJECTOR) REPLACEMENT PARTS

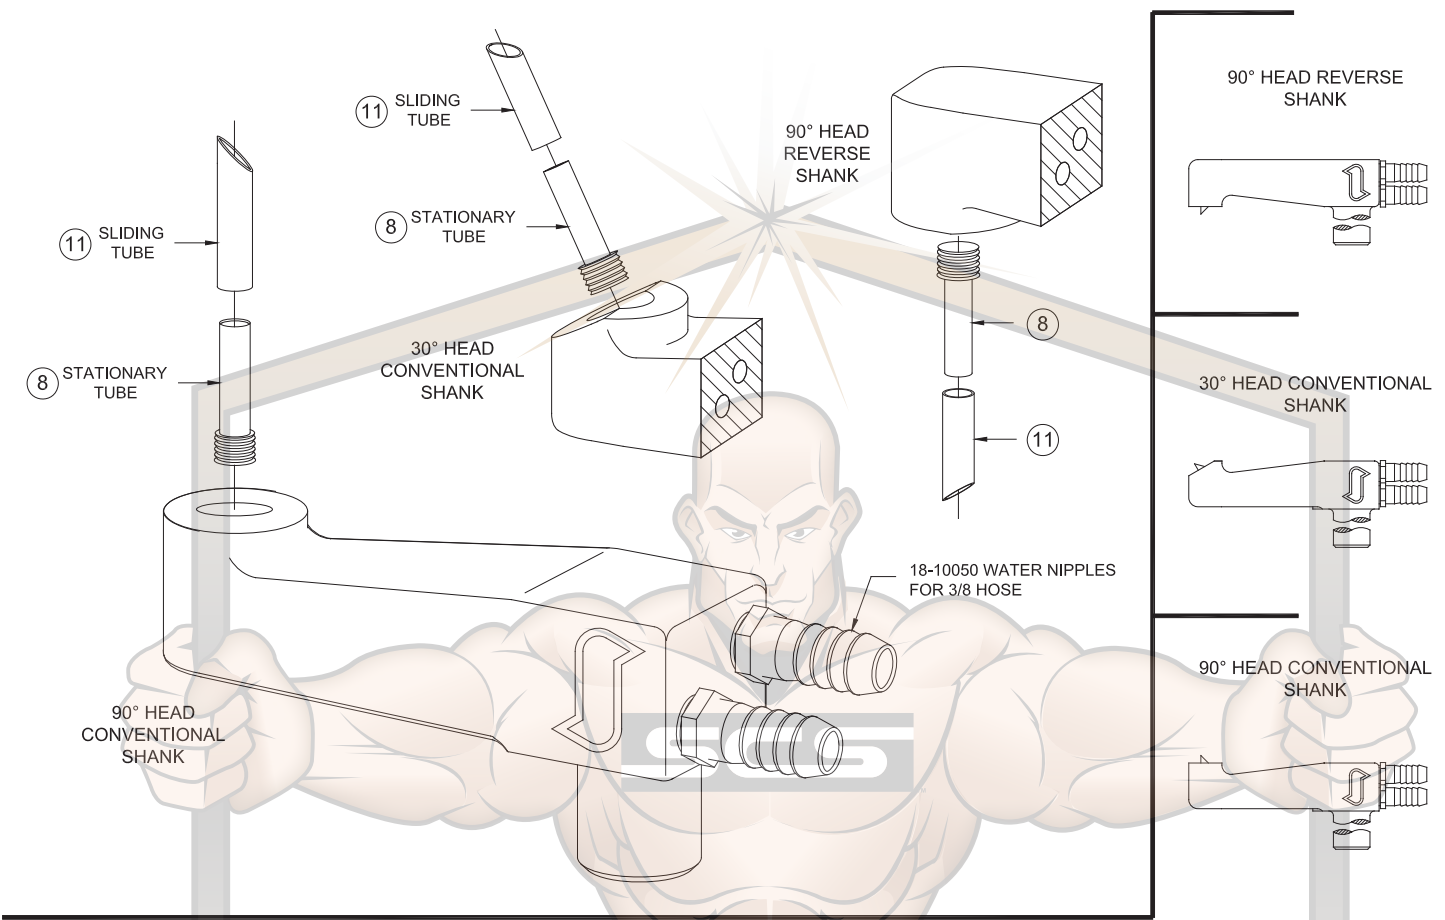

Part No. Holder Assy.	Taper	Angle Of Head	Stationary Tube 8	Sliding Tube 11	Shank Dia.
18-402	4 RW	90°	18-40041-1	18-40043-1	7/8
18-403					1
18-404					1-1/4
18-407	5 RW	90°	18-40041-1	18-40043-2	7/8
18-408					1
18-409					1-1/4
18-422	4 RW	90°	18-40041-1	18-40043-1	7/8
18-423					1
18-424					1-1/4
18-433*					1
18-428	5 RW	90°	18-40041-1	18-40043-2	1
18-429					1-1/4
18-439*					1-1/4
18-442	4 RW	30°	18-40041-1	18-40043-1	7/8
18-443					1
18-444					1-1/4
18-448	5 RW	30°	18-40041-1	18-40043-2	1
18-449					1-1/4
18-462	4 RW	30°	18-40041-1	18-40043-1	7/8
18-463					1
18-464					1-1/4
18-468	5 RW	30°	18-40041-1	18-40043-2	1
18-469					1-1/4

*Reverse shank

500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS

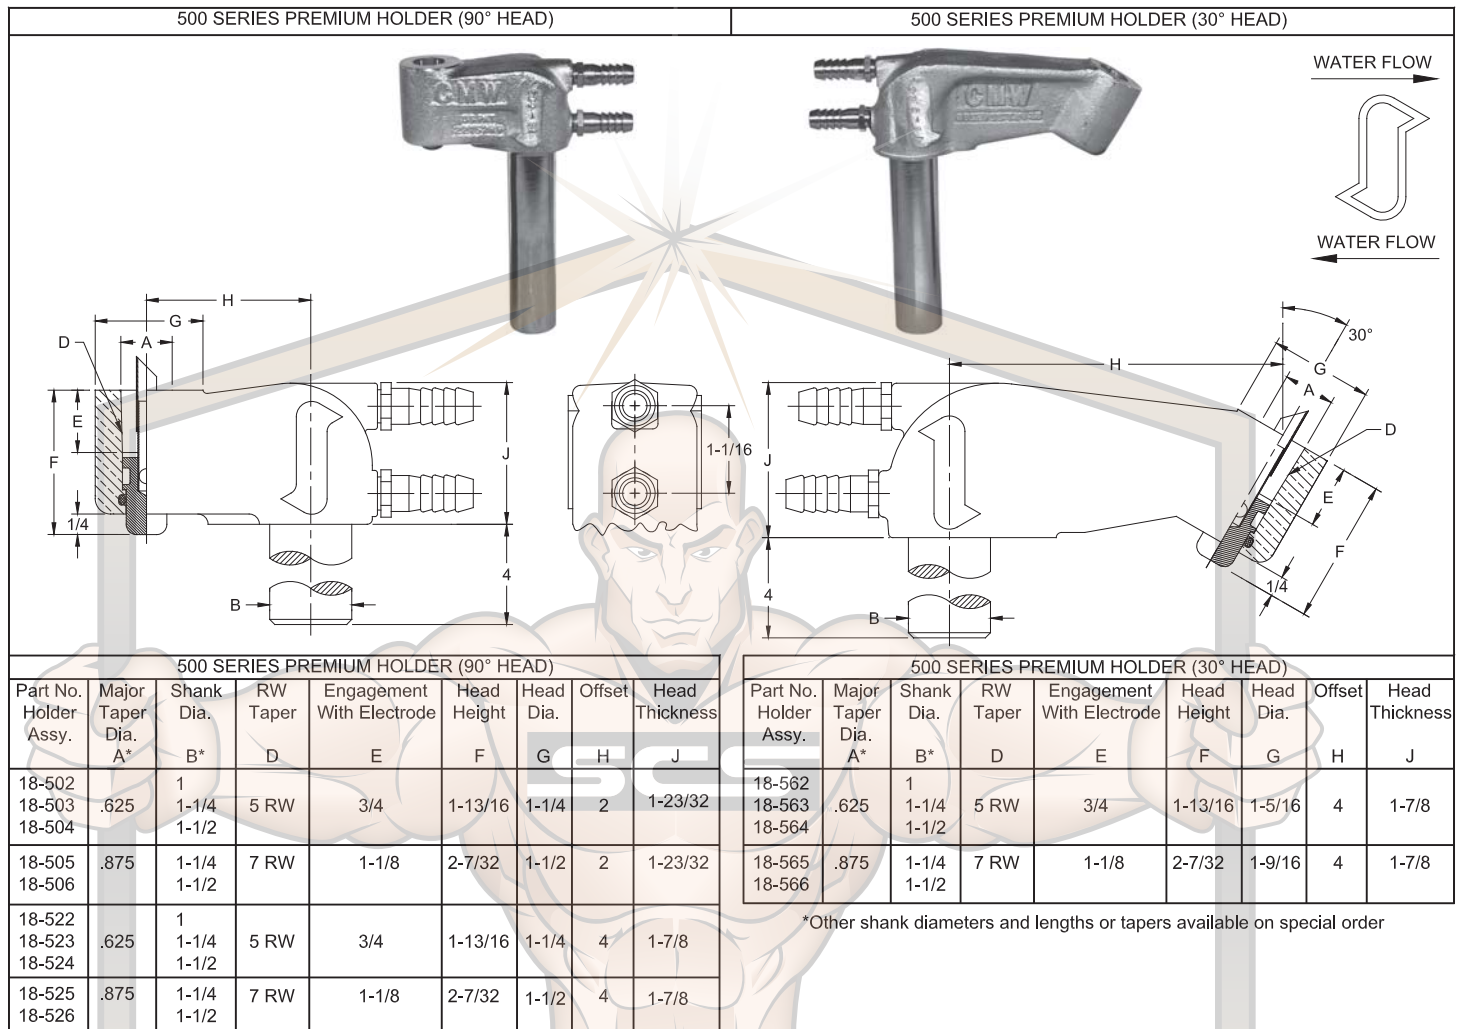


*Other shank diameters and lengths or tapers available on special order

500 SERIES PREMIUM (EJECTOR) WATER COOLED ELECTRODE HOLDERS WITH THREADED ADAPTERS


500 SERIES PREMIUM HOLDER WITH THREADED ADAPTERS										
Part No. Holder Assy.	Head Angle	Major Taper Dia. A*	Shank Dia. B*	RW Taper D	Engagement With Electrode E	Head Height F	Head Dia. G	Offset H	Head Thickness J	Part No. Threaded Adapter
18-5035	90°	.625	1-1/4	5 RW	3/4	1-13/16	1-1/4	2	1-23/32	18-7875
18-5036		.750		6 RW	7/8	1-15/16				18-7876
18-5045	90°	.625	1-1/2	5 RW	3/4	1-13/16	1-1/4	2	1-23/32	18-7875
18-5046		.750		6 RW	7/8	1-15/16				18-7876
18-5235	90°	.625	1-1/4	5 RW	3/4	1-13/16	1-1/4	4	1-7/8	18-7875
18-5236		.750		6 RW	7/8	1-15/16				18-7876
18-5245	90°	.625	1-1/2	5 RW	3/4	1-13/16	1-1/4	4	1-7/8	18-7875
18-5246		.750		6 RW	7/8	1-15/16				18-7876
18-5635	30°	.625	1-1/4	5 RW	3/4	1-13/16	1-1/4	4	1-7/8	18-7875
18-5636		.750		6 RW	7/8	1-15/16				18-7876
18-5645	30°	.625	1-1/2	5 RW	3/4	1-13/16	1-1/4	4	1-7/8	18-7875
18-5646		.750		6 RW	7/8	1-15/16				18-7876

*Other shank diameters and lengths or tapers available on special order

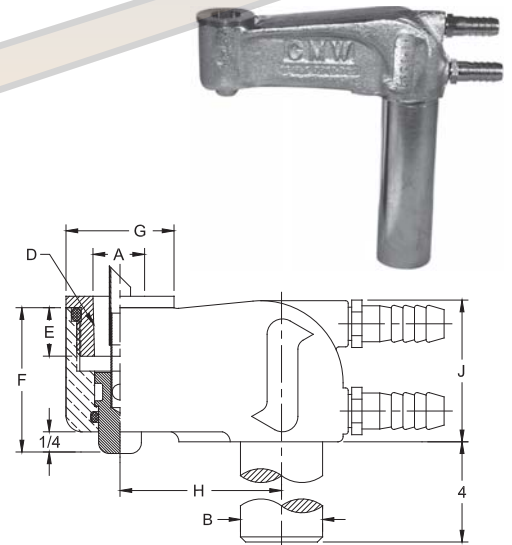




500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS

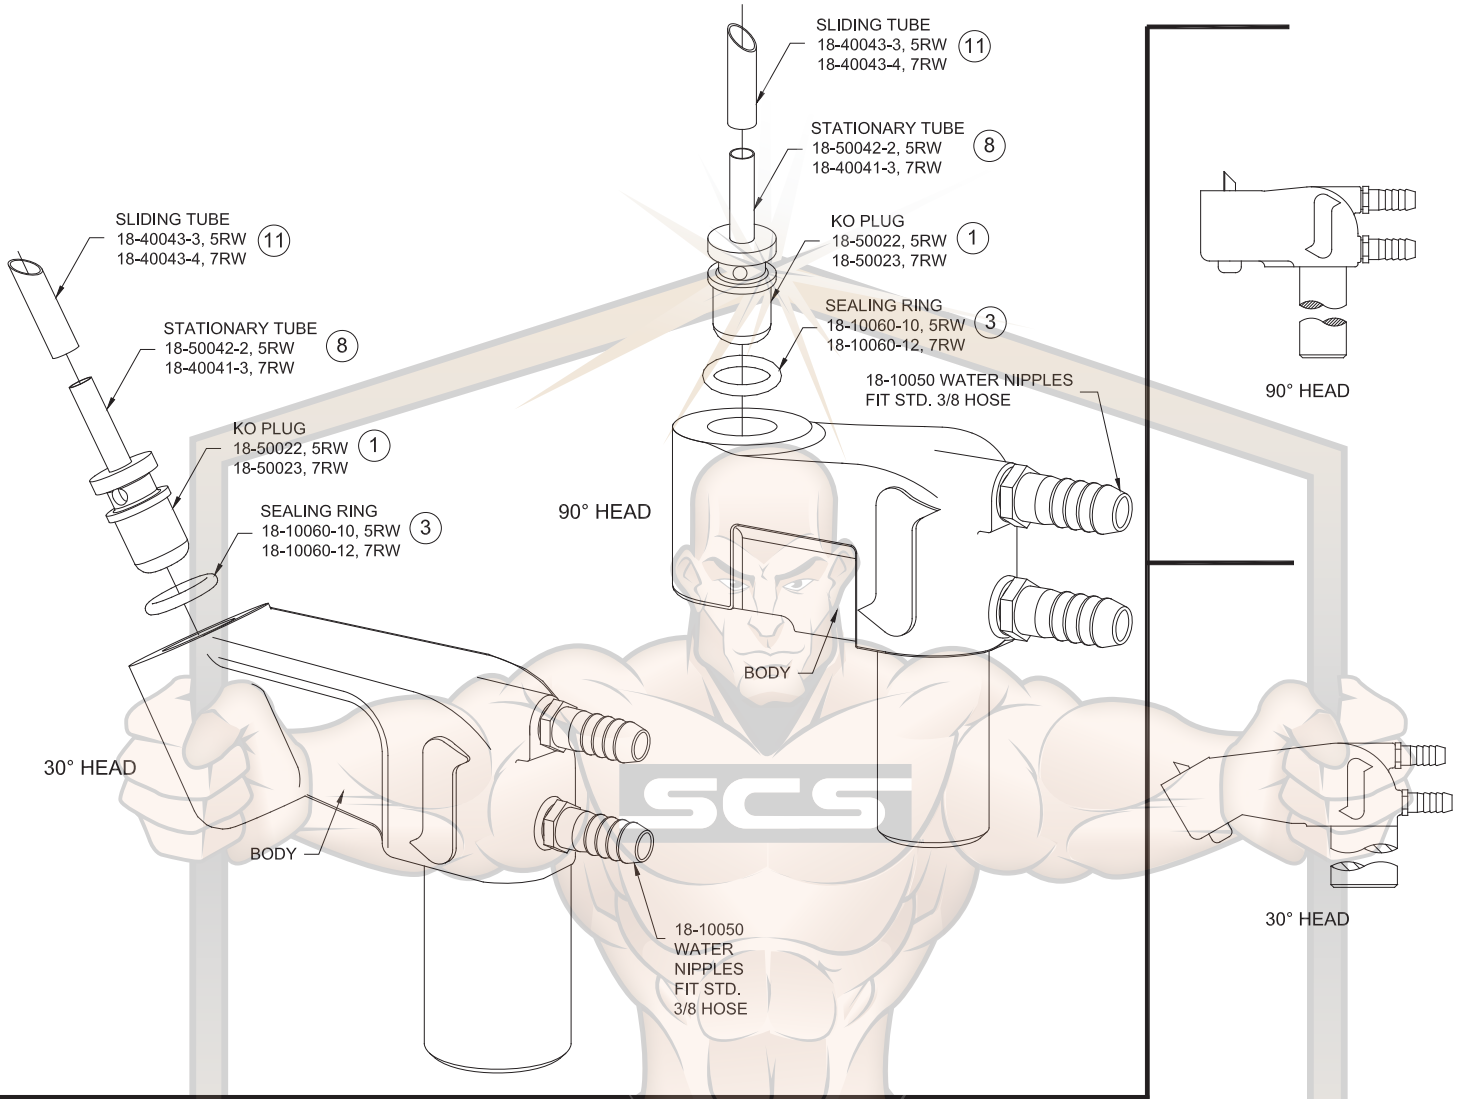

Part No. Holder Assy.	Taper	Angle Of Head	KO Plug 1	Sealing Ring 3	Stationary Tube 8	Sliding Tube 11	Shank Dia.
18-502							1
18-503	5 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4
18-504							1-1/2
18-505	7 RW	90°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4
18-506							1-1/2
18-522							1
18-523	5 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4
18-524							1-1/2
18-525	7 RW	90°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4
18-526							1-1/2
18-562							1
18-563	5 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4
18-564							1-1/2
18-565	7 RW	30°	18-50023	18-10060-12	18-40041-3	18-40043-4	1-1/4
18-566							1-1/2

500 SERIES PREMIUM (EJECTOR) WATER COOLED OFFSET HOLDERS WITH THREADED ADAPTER

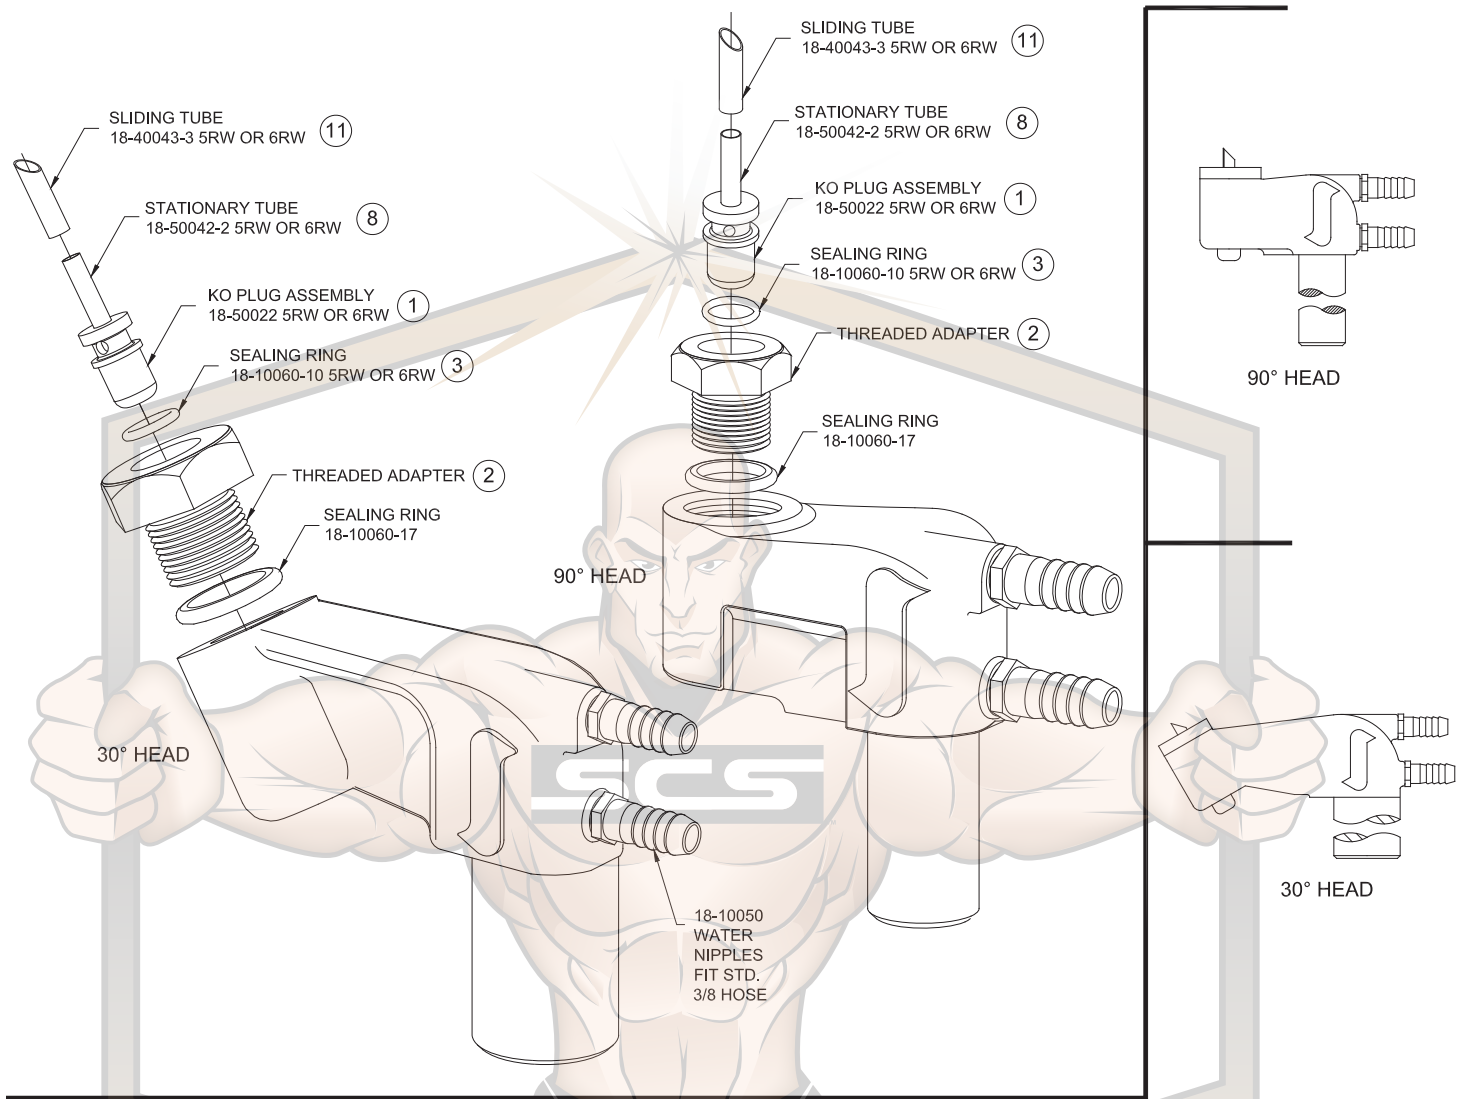




Part No. Holder Assy.	Taper	Angle Of Head	KO Plug ** 1	Sealing Ring 3	Stationary Tube 8	Sliding Tube 11	Shank Dia.	Threaded Adapter* 2
18-5035 18-5036	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5045 18-5046	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876
18-5235 18-5236	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5245 18-5246	5 RW 6 RW	90°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876
18-5635 18-5636	5 RW 6 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/4	18-7875 18-7876
18-5645 18-5646	5 RW 6 RW	30°	18-50022	18-10060-10	18-50042-2	18-40043-3	1-1/2	18-7875 18-7876

* Threaded adapter includes sealing ring 18-10060-17

** KO Plug assembly includes stationary tube 18-50042-2



600 SERIES UNIVERSAL WATER COOLED ELECTRODE HOLDERS

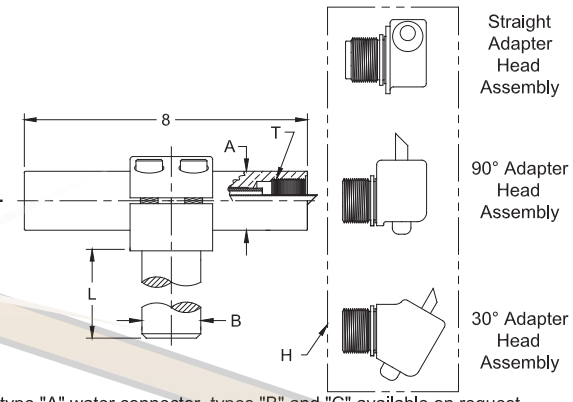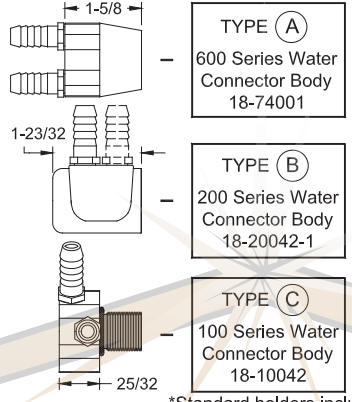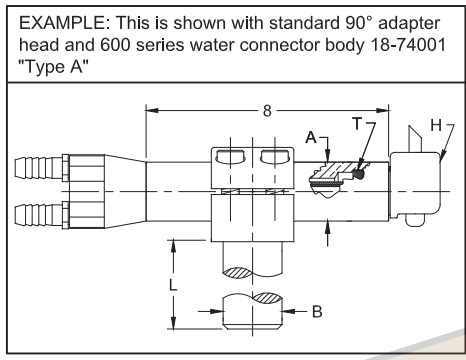

*Standard holders include type "A" water connector, types "B" and "C" available on request. See page 46 for adapter head details and page 47 for additional "T" connector information.


600 SERIES UNIVERSAL HOLDER (90° ADAPTER HEAD)						
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-601 18-603	4 RW	1	7/8	3	18-764	7/8-14
18-605 18-607		1-1/4	1-1/4	3-1/2	18-764	7/8-14
18-611 18-613	5 RW	1	7/8	3	18-766	7/8-14
18-615 18-617		1-1/4	1-1/4	3-1/2	18-766	7/8-14
18-651 18-657		1-1/4	1-1/4	3-1/2	18-780	1-14
18-655 18-653		1-1/2	1-1/4	4	18-780	1-14
18-661 18-665 18-663	7 RW	1-1/4	1-1/4	3-1/2	18-782	1-14

600 SERIES UNIVERSAL HOLDER (STRAIGHT ADAPTER HEAD)						
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-621 18-622	4 RW	1	7/8	3	18-768	7/8-14
18-623 18-671		1-1/4	1-1/4	3-1/2	18-768	7/8-14
18-624 18-674	5 RW	1-1/4	1-1/2	4	18-768	7/8-14
18-672 18-673		1-1/2	1-1/2	4	18-784	1-14

600 SERIES UNIVERSAL HOLDER (30° ADAPTER HEAD)						
Part No. Holder Assy.*	Taper	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-602 18-604	4 RW	1	7/8	3	18-765	7/8-14
18-606 18-608		1-1/4	1-1/4	3-1/2	18-765	7/8-14
18-612 18-614	5 RW	1	7/8	3	18-767	7/8-14
18-616 18-618		1-1/4	1-1/4	3-1/2	18-767	7/8-14
18-652 18-658		1-1/4	1-1/4	3-1/2	18-781	1-14
18-656 18-654		1-1/2	1-1/4	4	18-781	1-14
18-662 18-666 18-664	7 RW	1-1/4	1-1/4	3-1/2	18-783	1-14


600 SERIES UNIVERSAL WATER COOLED ELECTRODE HOLDER (THREADED ADAPTER HEAD)

600 SERIES UNIVERSAL HOLDER (THREADED ADAPTER HEAD)							
Part No. Holder Assy.*	Taper	Head Angle	Barrel Dia. A	Shank Dia. B	Shank Length L	Head Assy. H	Barrel Thread Size T
18-6515 18-6535	5 RW	90°	1-1/4	1-1/4	3-1/2	18-7805	1-14
18-6525 18-6545		30°	1-1/4	1-1/4	3-1/2	18-7815	1-14
18-6516 18-6536	6 RW	90°	1-1/4	1-1/4	3-1/2	18-7806	1-14
18-6526 18-6546		30°	1-1/4	1-1/4	3-1/2	18-7816	1-14

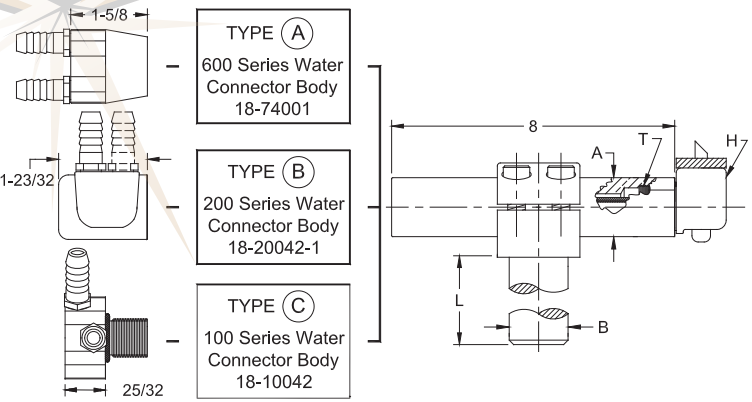

*Standard holders include type "A" water connector, types "B" and "C" available on request

600 SERIES UNIVERSAL WATER COOLED OFFSET HOLDERS

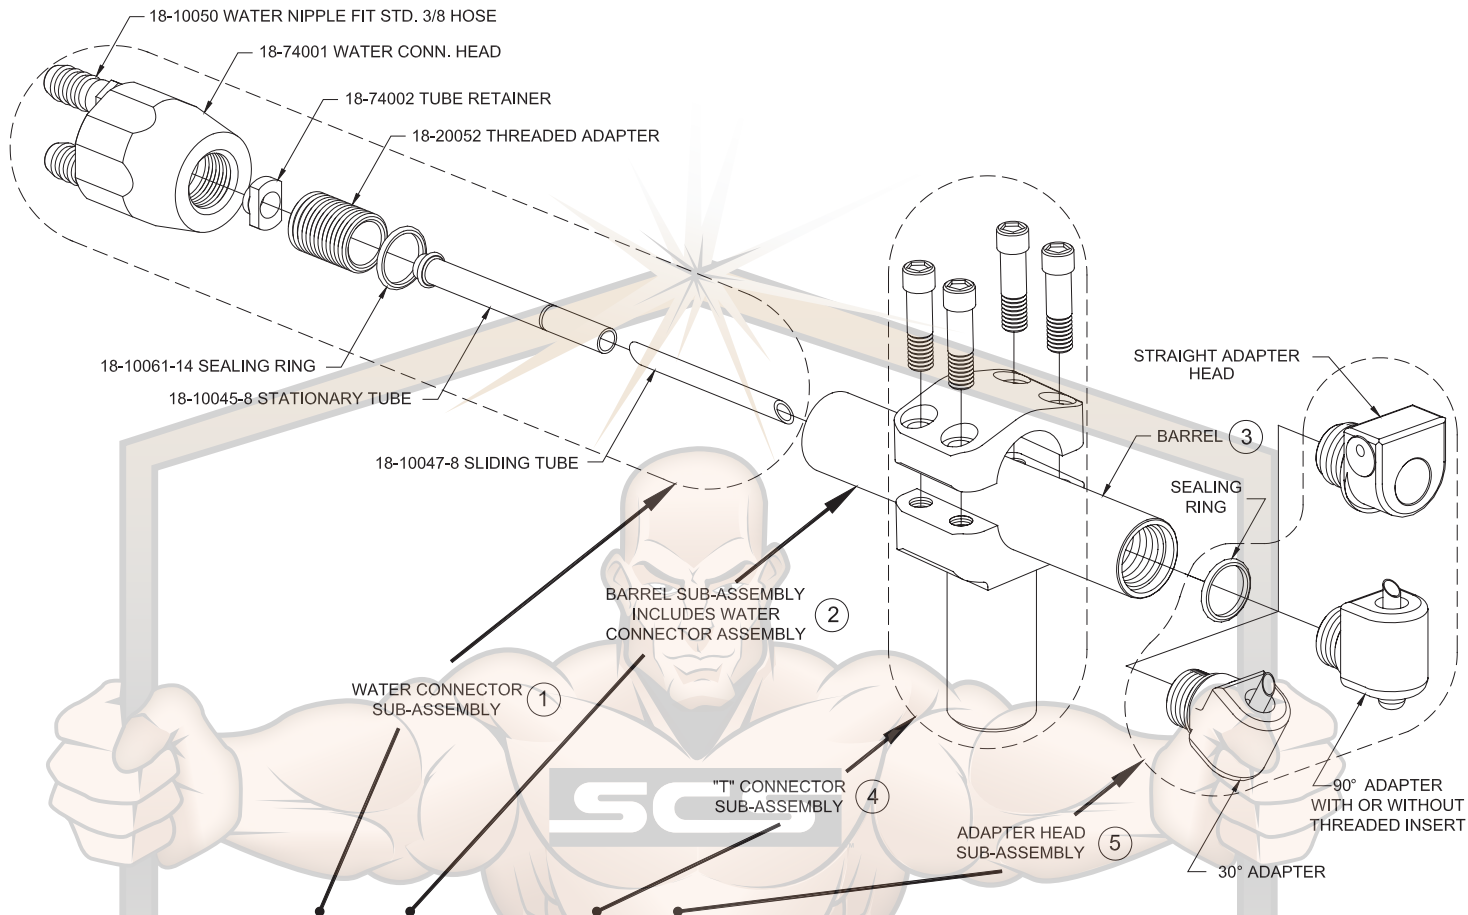

Part No. Holder Assy.	Taper	Angle Of Head	Water Conn. Assembly 1	Barrel Assy. 2	Barrel 3	"T" Conn. Assy. * 4	Adapter Head Assy.* 5	Part No. Holder Assy.	Taper	Angle Of Head	Water Conn. Assembly* 1	Barrel Assy. 2	Barrel 3	"T" Conn. Assy. * 4	Adapter Head Assy.* 5
18-601 18-602	4 RW	90°	18-74000-8	18-701	18-37210-8	18-725	18-764 18-765	18-655 18-656	5 RW	90°	18-74000-8	18-705	18-37610-8	18-728	18-780 18-781
18-603 18-604		30°								18-726					
18-605 18-606		90°	18-74000-8	18-702	18-37310-8	18-727	18-764 18-765			STR.	18-74000-8	18-704 18-705	18-37510-8 18-37610-8	18-727 18-729	18-784
18-607 18-608		30°								18-730					
18-611 18-612	5 RW	90°	18-74000-8	18-701	18-37210-8	18-725	18-766 18-767	18-6515 18-6525	5 RW THD.	90°	18-74000-8	18-704	18-37510-8	18-727	18-7805 18-7815
18-613 18-614		30°								18-726					
18-615 18-616		90°	18-74000-8	18-702	18-37310-8	18-727	18-766 18-767			6 RW	18-74000-8	18-704	18-37510-8	18-727	18-7806 18-7816
18-617 18-618		30°								18-730					
18-621 18-622	7 RW	STR.	18-74000-8	18-701	18-37210-8	18-725 18-726	18-768	18-661 18-662	7 RW	90°	18-74000-8	18-704	18-37510-8	18-727	18-782 18-783
18-623 18-624		STR.								18-727 18-730					
18-651 18-652		90°	18-74000-8	18-704	18-37510-8	18-727	18-780 18-781			90°	18-74000-8	18-705	18-37610-8	18-729	18-782 18-783
18-657 18-658		30°								18-730					

* See page 46 for adapter head details and page 47 for additional "T" connector information.

MALE THREAD TO FEMALE TAPER UNIVERSAL ADAPTERS





SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

MALE THREAD TO FEMALE TAPER UNIVERSAL ADAPTERS




MALE THREAD TO FEMALE TAPER 90° TYPE

MALE THREAD TO FEMALE TAPER 90° TYPE (ADAPT WITH INSERT)

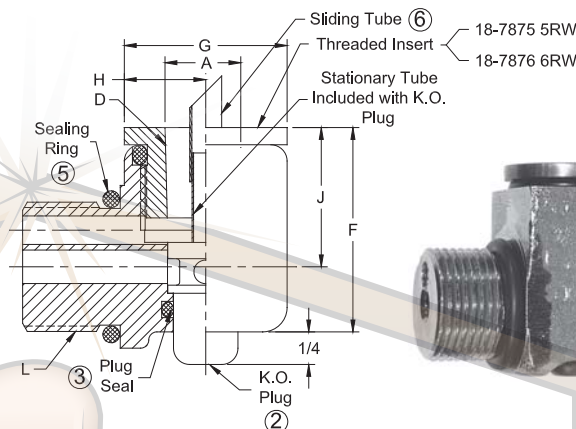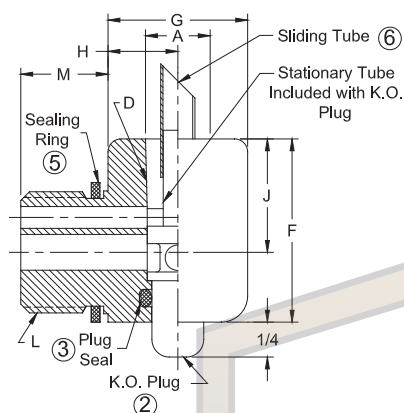

MALE THREAD TO FEMALE TAPER 30° TYPE

MALE THREAD TO FEMALE TAPER STRAIGHT TYPE

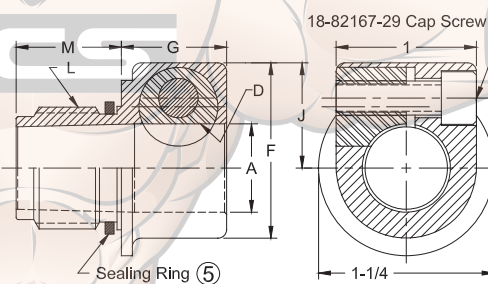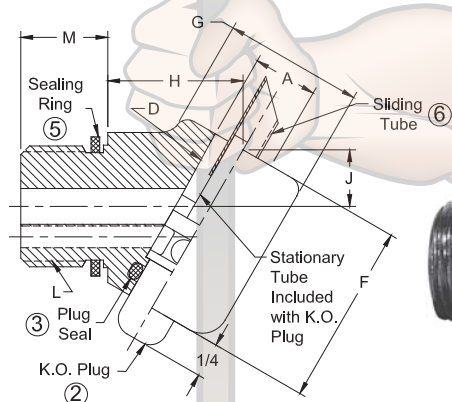

MALE THREAD TO FEMALE TAPER UNIVERSAL ADAPTERS





Adapter Part No.	Adapter Angle	Male Thread		Female Taper		Overall Head Height F	Head Diameter or Length G	End Barrel to C.L. of Taper H	C.L. Barrel to C.L. of Taper J	K.O. Plug Part No. 2	K.O. Plug Seal Ring Part No. 3	Sealing Ring Part No. 5	Sliding Tube Part No. 6
		Thread Size L	Length M	Taper Size D	Major Dia. A								
18-764 18-765	90° 30°	7/8-14	9/16	4 RW	.463	1-9/16	1	19/32 1-1/16	13/16 15/32	18-50021	18-10060-8	18-76460	18-50041-1
18-766 18-767 18-768	90° 30° Str.	7/8-14	9/16	5 RW	.625	1-13/16 1-13/16 1-1/4	1 1-1/16 3/4	19/32 1-11/32 --	1-1/16 53/64 3/4	18-50022 18-50022 --	18-10060-10 --	18-76460	18-40043-3 18-40043-3 --
18-780 18-781 18-784	90° 30° Str.	1-14	3/4	5 RW	.625	1-13/16 1-13/16 1-1/4	1-1/4 1-5/16 3/4	21/32 1-3/8 --	1-1/16 13/16 3/4	18-50022 18-50022 --	18-10060-10 --	18-10060-17	18-40043-3 18-40043-3 --
18-782 18-783	90° 30°	1-14	3/4	7 RW	.875	2-3/16	1-1/2 1-9/16	25/32 1-3/8	1-3/16 13/16	18-50023	18-10060-12	18-10060-17	18-40043-4
18-7805* 18-7815*	90° 30°	1-14	3/4	5 RW	.625	1-13/16	1-1/4 1-5/16	21/32 1-3/8	1-1/16 13/16	18-50022	18-10060-10	18-10060-17	18-40043-3
18-7806* 18-7816*	90° 30°	1-14	3/4	6 RW	.750	1-15/16	1-1/4 1-5/16	21/32 1-7/16	1-3/16 59/64	18-50022	18-10060-10	18-10060-17	18-40043-3

*These adapters have threaded inserts 18-7875 (5RW) or 18-7876 (6RW) taper

"T" CONNECTORS FOR HOLDERS

90° HEAVY DUTY "T" CONNECTORS

30° HEAVY DUTY "T" CONNECTORS

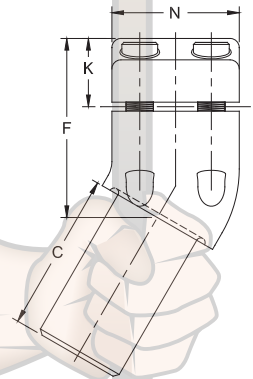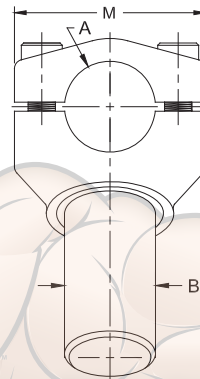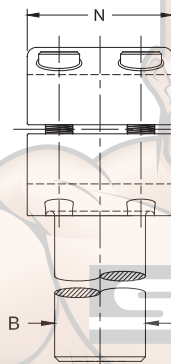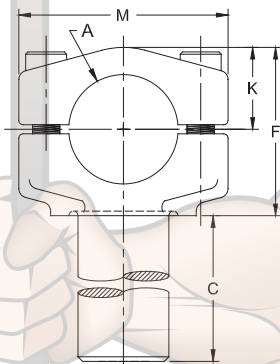

Available as cast
 CMW®353
 material

HEAVY DUTY 90° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B*	Shank Length C	Head Height F	Hole C.L. Over Top K	Length M	Width N	Number of Bolts
18-725 18-726	1	7/8 1	3	1-3/4	3/4	2-5/16	1-1/2	2 Bolt
18-727 18-728	1-1/4 1-1/2	1-1/4	3-1/2 4	2 2-5/16	15/16 1-1/8	2-5/8 2-7/8	1-3/4 2	4 Bolt
18-729 18-730	1-1/2 1-1/4	1-1/2	4	2-5/16	1-1/8	2-7/8	2	

HEAVY DUTY 30° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B	Shank Length C	Head Height F	Hole C.L. Over Top K	Length M	Width N	Number of Bolts
18-731 18-732	1	7/8 1	3	2	3/4	2-5/16	1-1/2	2 Bolt
18-733 18-734	1-1/4 1-1/2	1-1/4 1-1/2	3-1/2 4	2-13/32 2-47/64	15/16 1-1/8	2-5/8 2-7/8	1-3/4 2	4 Bolt

These 30° "T" Connectors may be interchanged with the 90° universal type "T" Connectors. See page 38 for suggested setups.


"T" Connectors of other shank diameters and lengths may be ordered upon request.

Available as cast CMW®3 material

SMALL BARREL 90° "T" CONNECTORS

"T" Connector Assy. No.	Hole Dia. A	Shank Dia. B	Shank Length C	Head Height F	Hole C.L. Over Top K	Dia. M	Number of Bolts
18-720 18-721	3/4	3/4 7/8	3	1-1/4	5/8	1-1/2	1 Bolt
18-722 18-723 18-724		1 1-1/4 1-1/2					

"T" Connectors of other shank diameters and lengths may be ordered upon request.

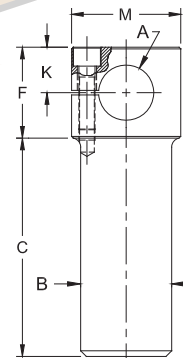

800 SERIES "NU-TWIST"® ADAPTERS


CMW "NU-TWIST"® FEATURES

1. Hex locking nut may be tightened or loosened effectively by hand or wrench for easy replacement of electrodes.
2. "O" ring seals provide water tight connections.
3. Double groove construction in bore or locking nut accurately aligns and locks the

electrode in position with a maximum of a turn and one half.

4. Through use of baffles in adapters and in electrodes over 1" long efficient cooling is effectively achieved.
5. All components are of corrosion-resistant alloys.
6. Maintenance costs are unusually low.
7. Adapter bases are CMW®3 material.

SURFACE MOUNTED ADAPTERS

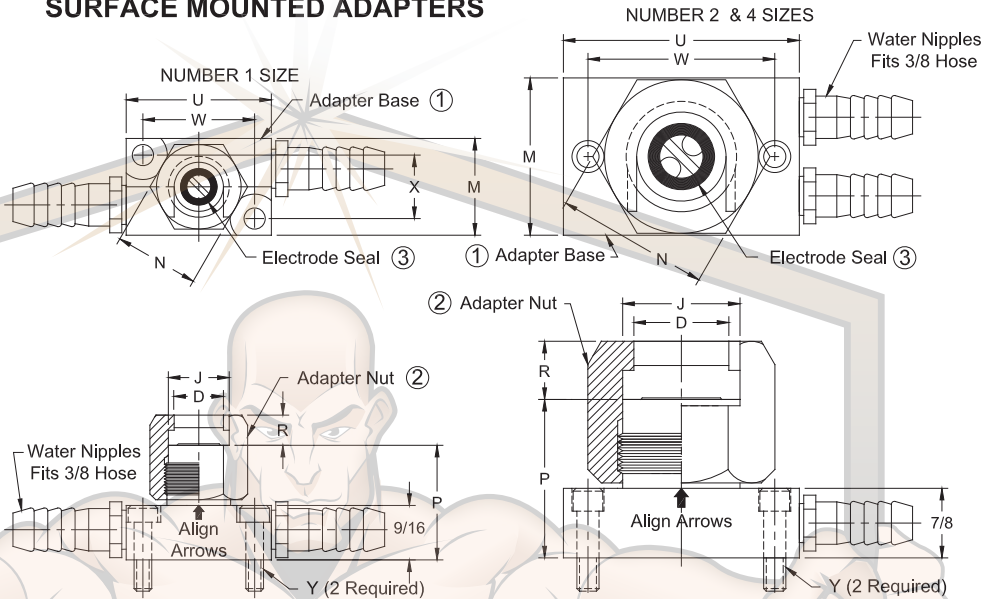





800 SERIES "NU-TWIST"® SURFACE MOUNTED											
Size	Adapter Part No.	Adapter Size									
		D	J	M	N	P	R	U	W	X	Y
1	18-801	1/2	5/8	1	7/8	1-1/4	1/4	1-1/2	1-5/32	21/32	No. 10-24 Scr.
2	18-802	15/16	1-1/8	1-1/2	1-1/2	1-13/16	7/16	2-1/2	2	--	No. 1/4-20 Scr.
4	18-804	1-7/16	1-5/8	2	2	1-13/16	7/16	3	2-3/8	--	No. 1/4-20 Scr.

REPLACEMENT PARTS				
Adapter Part No.	Water Nipples	Adapter Base 1	Adapter Nut 2	Electrode Seals 3
18-801		18-80110	18-80150	18-10060-5
18-802	18-10050	18-80210	18-80250	18-10060-1
18-804		18-80410	18-80450	18-10061-14

For replacement parts see page 49

800 SERIES "NU-TWIST"® THREADED ADAPTERS & MOUNTING INFORMATION

May use with 100, 200, and 300 series holders to make "NU-TWIST"® holders

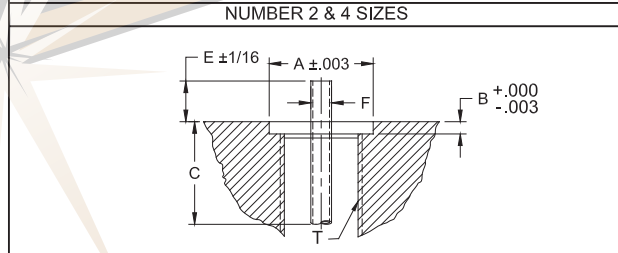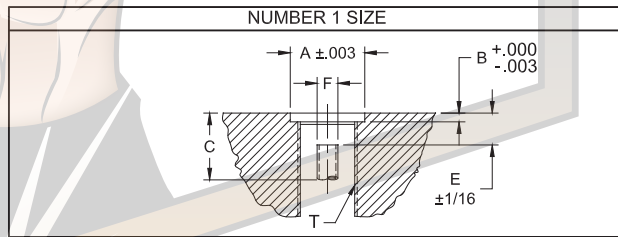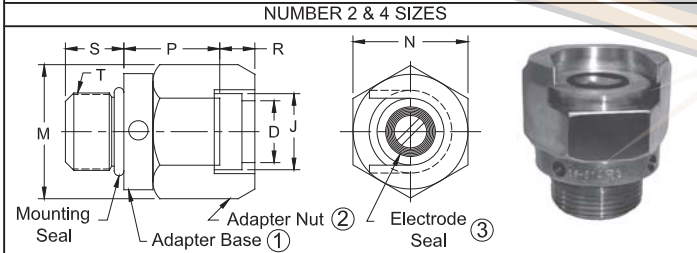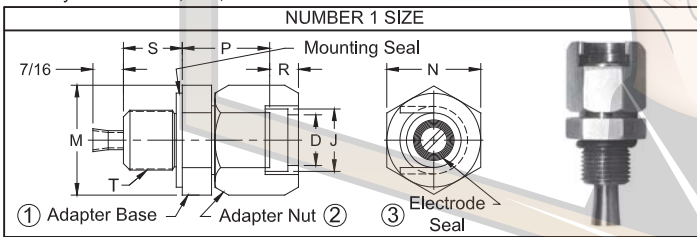


800 SERIES "NU-TWIST"® THREADED									
Size	Adapter Part No.	Adapter Size							
		D	J	M	N	P	R	S	T (Thread)
1	18-811	1/2	5/8	1	7/8	15/16	1/4	9/16	5/8-18
2	18-812	15/16	1-1/8	1-1/2	1-1/2	1-5/16	7/16	3/4	1-14
4	18-814	1-7/16	1-5/8	2	2	1-5/16	7/16	3/4	1-1/2-12

MOUNTING INFORMATION FOR THREADED ADAPTERS							
Size	Thd. Adapter Assy. No.	C'bore Dia. A	C'bore Depth B	Thread Depth Min. C	Tube Height E	Tube Dia. F	Thread T
1	18-811	.750	.083	5/8	3/8	.244	5/8-18
2	18-812	1.126	.113	13/16	15/16	.244	1-14
4	18-814	1.626	.173	13/16	15/16	.375	1-1/2-12

For replacement parts see page 49


800 SERIES "NU-TWIST"[®] THREADED ADAPTERS

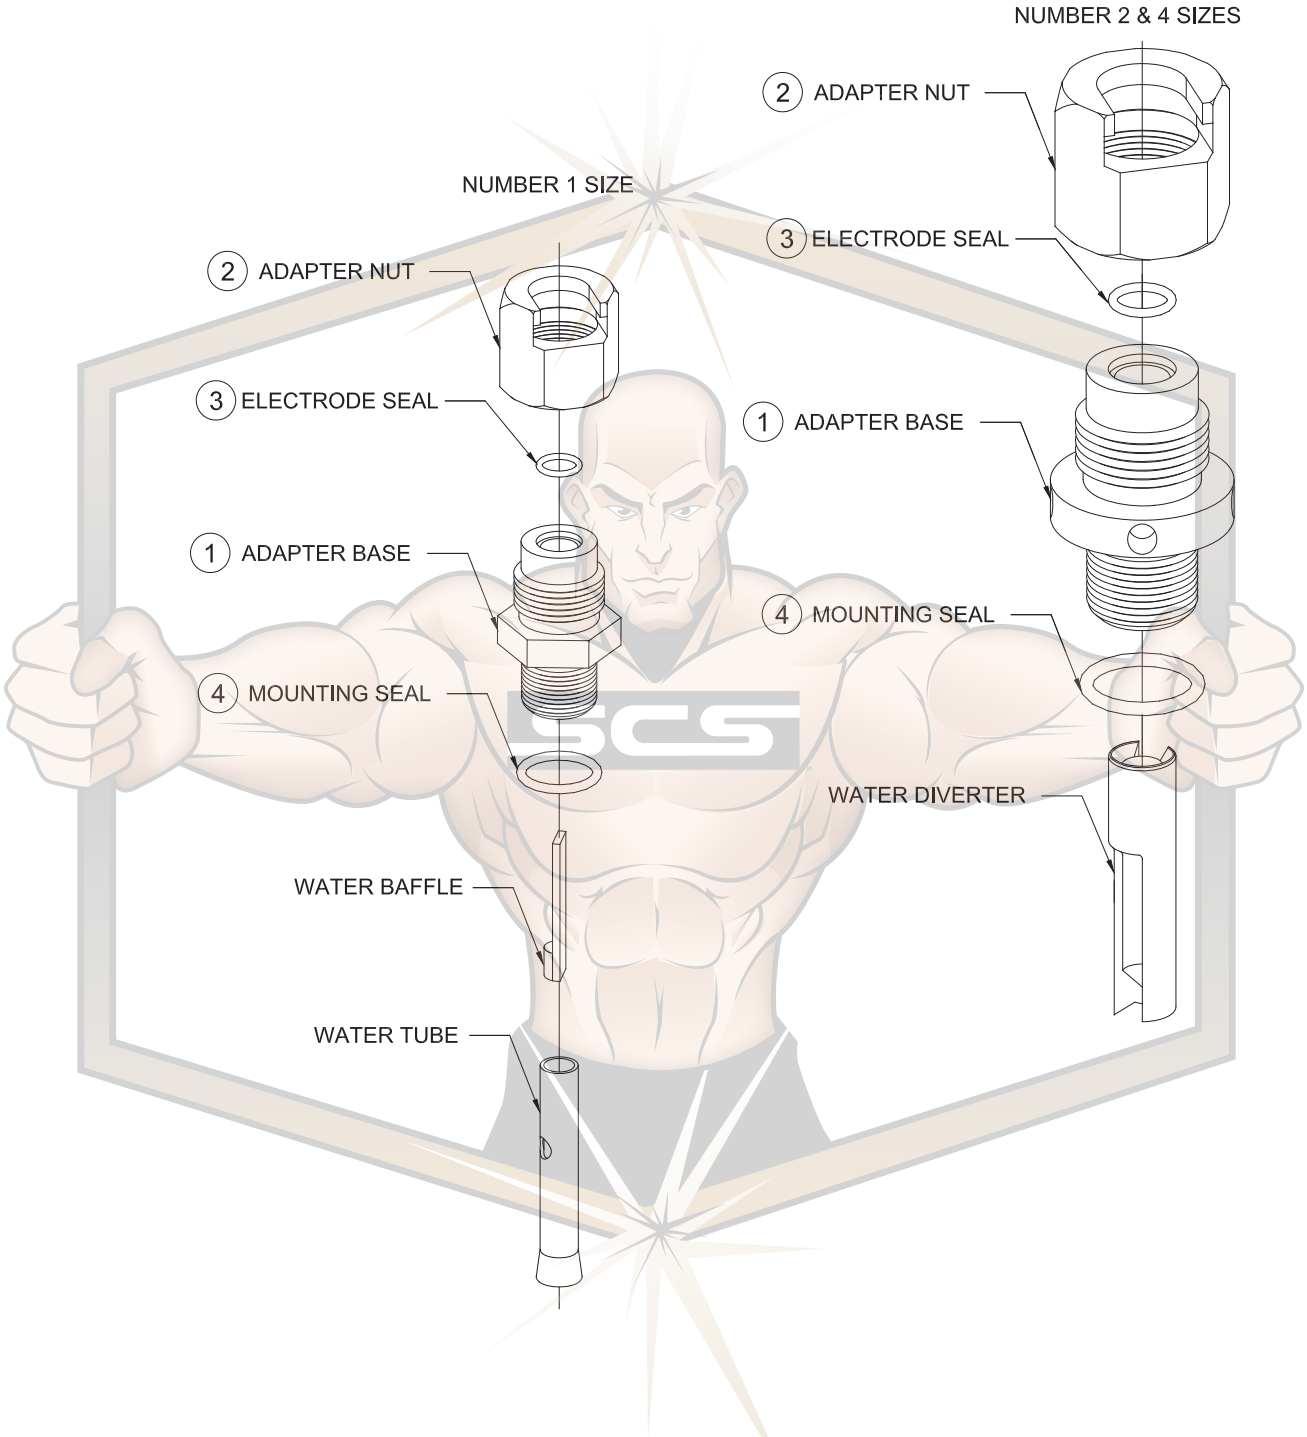

Adapter Assembly Part No.	Adapter Base* 1	Adapter Nut 2	Electrode Seal 3	Mounting Seal 4
18-811	18-81110	18-80150	18-10061-5	18-10060-11
18-812	18-81210	18-80250	18-10061-10	18-10060-17
18-814	18-81410	18-80450	18-10061-14	18-10060-25

* Adapter base includes water tube & baffle or water diverter

"NU-TWIST"[®] ELECTRODES

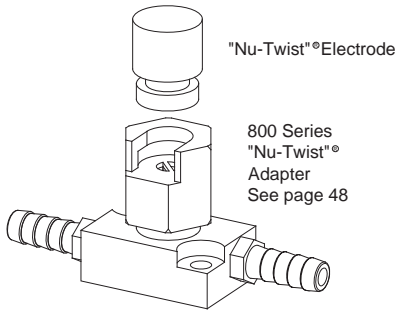

FLAT FACE "NU-TWIST" [®] ELECTRODE				TYPE 0 FLAT & 0 TRUNCATED "NU-TWIST" [®] ELECTRODE							
Size	Type	Electrode Part No.		Body Dia. H	Weld Face Dia. A	Overall Length C	Adapter Clearance E	Water Hole Dia. F	Water Hole Depth G	Electrode Seat Dia. J	Elect. Ext. From Adapt. K
		CMW [®] 3	CMW [®] 100								
1	0 Flat	338750	538750	1/2	1/2	3/4	--	1/4	3/8	.625	1/2
		338030	538030	1/2	1/2	1-1/2	--	1/4	1-1/8	.625	1-1/4
1	0 Trunc.	378750	578750	1/2	1/4	3/4	--	1/4	3/8	.625	1/2
		378030	578030	1/2	1/4	1-1/2	--	1/4	1-1/8	.625	1-1/4
1	Flat	338751	538751	5/8	5/8	3/4	5/16	1/4	3/8	.625	1/2
		338031	538031	5/8	5/8	1-1/2	5/16	1/4	1-1/8	.625	1-1/4
2	Flat	338012	538012	1-1/4	1-1/4	1	5/8	1/2	1/2	1.125	1/2
		338052	538052	1-1/4	1-1/4	2	5/8	1/2	1-1/2	1.125	1-1/2
4	Flat	338014	538014	1-3/4	1-3/4	1	5/8	3/4	1/2	1.625	1/2
		338054	538054	1-3/4	1-3/4	2	5/8	3/4	1-1/2	1.625	1-1/2

- No tapers or threads
- Can be extracted with a simple turn of hexagon locking nut
- Any contour in electrode face can be located or relocated in a given position
- Water circulated to end of electrode for maximum cooling
- Silver plated contact surfaces on electrode and base for maximum conductivity
- Provides a simple, low-cost electrode for most applications
- Electrodes shown can be modified with contours to provide faces required for most resistance welding applications

Special face contours, lengths and diameters available on special order

THREADED SOCKET (OR BUTTON) ELECTRODES

(USE WITH 900 AND 950 SERIES HOLDERS ON PAGE 51)

ALL DIMENSIONS WITH AN (*) ARE COMMON TO EACH CAP IN A HORIZONTAL LINE.



FLAT FACE	TRUNCATED FACE	RADIUS FACE	OFFSET FACE	30° OFFSET FACE
<p>CMW[®]28 18-970 CMW[®]3 18-980 CMW[®]100 18-990</p>	<p>CMW[®]28 18-971 CMW[®]3 18-981 CMW[®]100 18-991</p>	<p>CMW[®]28 18-972 CMW[®]3 18-982 CMW[®]100 18-992</p>	<p>CMW[®]28 18-973 CMW[®]3 18-983 CMW[®]100 18-993</p>	<p>CMW[®]28 18-974 CMW[®]3 18-984 CMW[®]100 18-994</p>

MALE THREADED BUTTON ELECTRODES

CMW shall supply a variety of nose configurations (examples shown below) made to your specifications. These electrodes are available in CMW[®]100, CMW[®]28 and CMW[®]3 materials to meet your various applications. Threads in both Unified (inch) or metric sizes can be supplied.




900 SERIES LIGHT DUTY WATER COOLED UNIVERSAL HOLDER

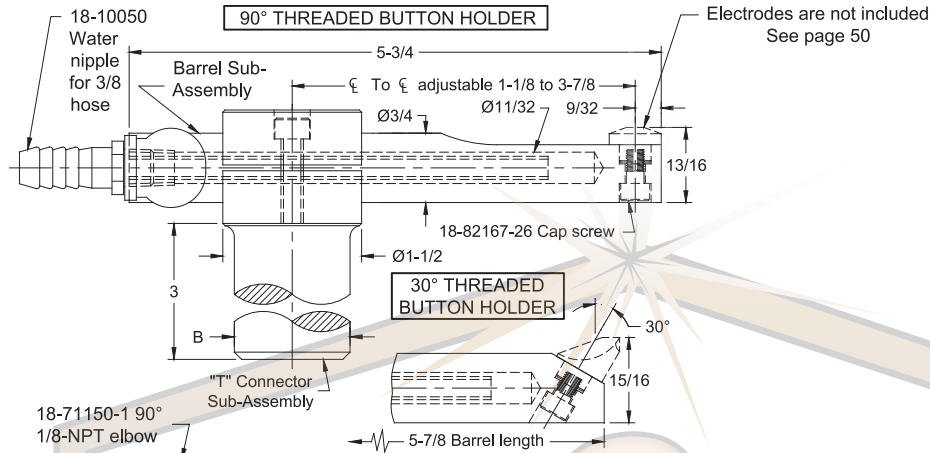


Holder Type	Holder Assembly Part No.	Holder Angle	Shank Dia. B	Barrel Sub-Assy.	Barrel	"T" Conn.
Threaded Button	18-901	90°	3/4	18-709	18-70910-1	18-720
	18-902	30°	3/4	18-710	18-71010-1	18-720
	18-903	90°	7/8	18-709	18-70910-1	18-721
	18-904	30°	7/8	18-710	18-71010-1	18-721
	18-905	90°	1	18-709	18-70910-1	18-722
	18-906	30°	1	18-710	18-71010-1	18-722
	18-907	90°	1-1/4	18-709	18-70910-1	18-723
	18-908	30°	1-1/4	18-710	18-71010-1	18-723
	18-909	90°	1-1/2	18-709	18-70910-1	18-724
	18-900	30°	1-1/2	18-710	18-71010-1	18-724

950 SERIES WATER COOLED PADDLE HOLDERS FOR THREADED BUTTON ELECTRODES

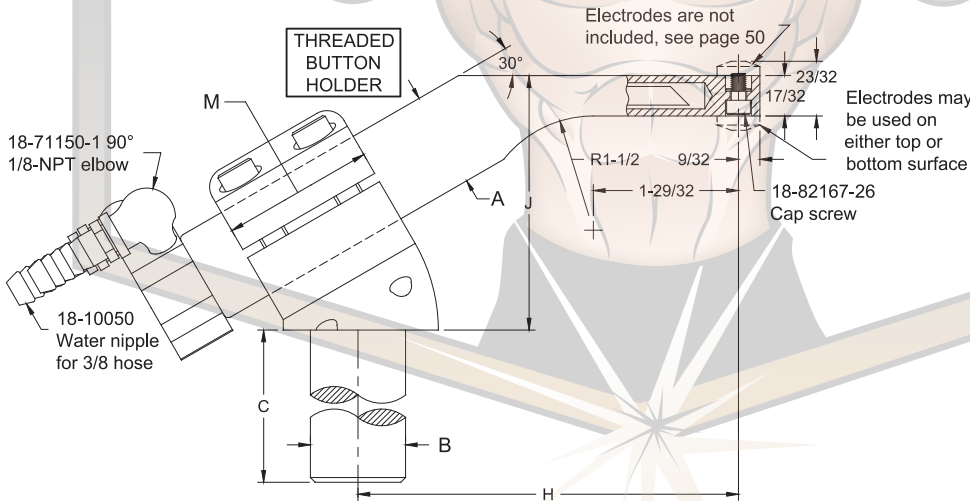

Holder Type	Holder Assembly Part No.	Barrel Dia. A	Shank Dia. B	Shank Length C	Offset Range H	Height Range J	Width M	Barrel Sub-Assy.	"T" Conn.
Threaded Button	18-952	1	7/8	3	3-3/8 to 5-3/32	2-1/16 to 3-1/16	1-1/2	18-713	18-731
	18-953	1	1	1	3-3/8 to 5-3/32	2-1/16 to 3-1/16	1-1/2	18-713	18-732
	18-954	1-1/4	1-1/4	3-1/2	4 to 5-23/32	2-3/4 to 3-3/4	1-3/4	18-714	18-733
	18-955	1-1/2	1-1/2	4	4-7/32 to 5-15/16	2-7/8 to 3-7/8	2	18-715	18-734

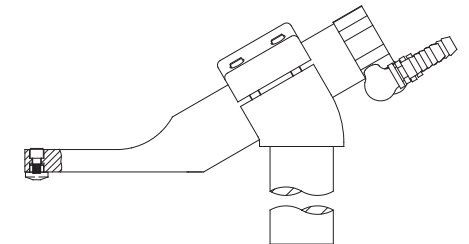


VIEW IS SHOWING BARREL SUB-ASSY AND ELECTRODE REVERSED IN SHANK




HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

18-826 #1 SIZE UNIT WITH NU-TWIST® SHOWN

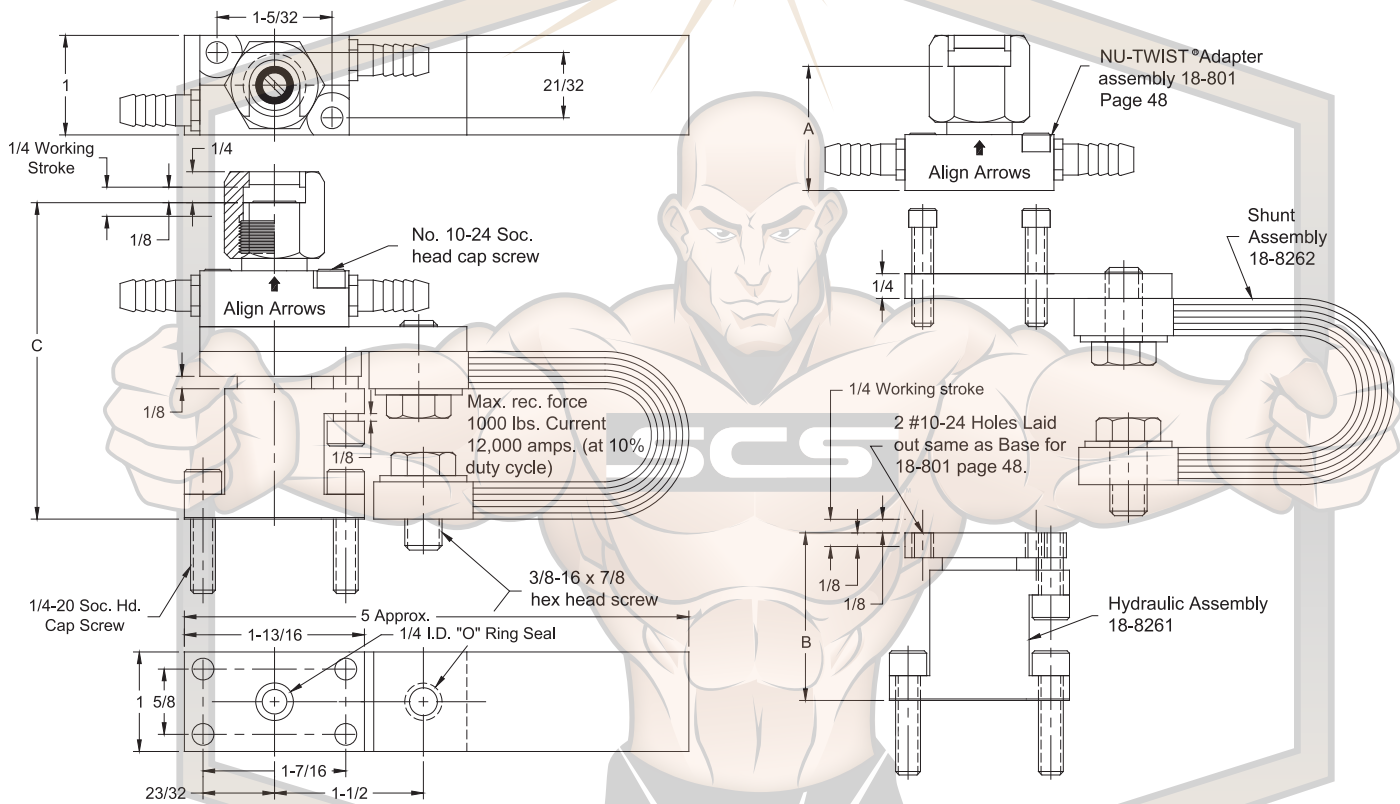


Complete Unit Part No.	Unit Size.	Electrode Attachment	Included Tapered Adapters	Height A	Mean Height B	Mean Electrode Engagement Height C
18-826	#1	NU-TWIST®	--	1-1/4		3-13/64
18-82650	#1	1/2-14 Pipe Thd.	--	1-1/2		3-29/64
18-82651	#1 with adapters	5 RW Male cap	18-7465-07	1-59/64	1-43/64	3-7/8
18-82652		4 RW	18-746-07	1-51/64		3-3/4
18-82653		5 RW	18-747-07	1-51/64		3-3/4

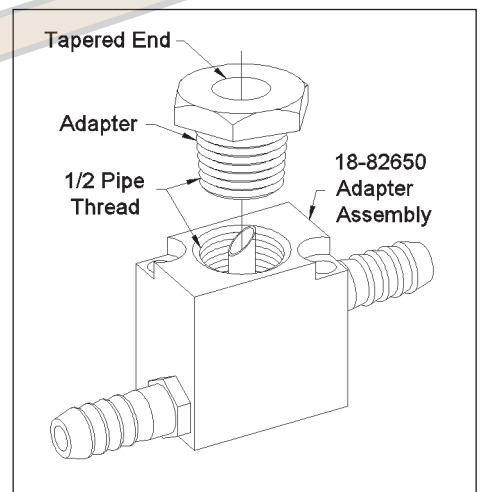

SOUTHERN COPPER & SUPPLY
 COMPANY, INC.
 800-289-2728

HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES


18-826 COMPLETE #1 SIZE "NU-TWIST"® ASSEMBLY

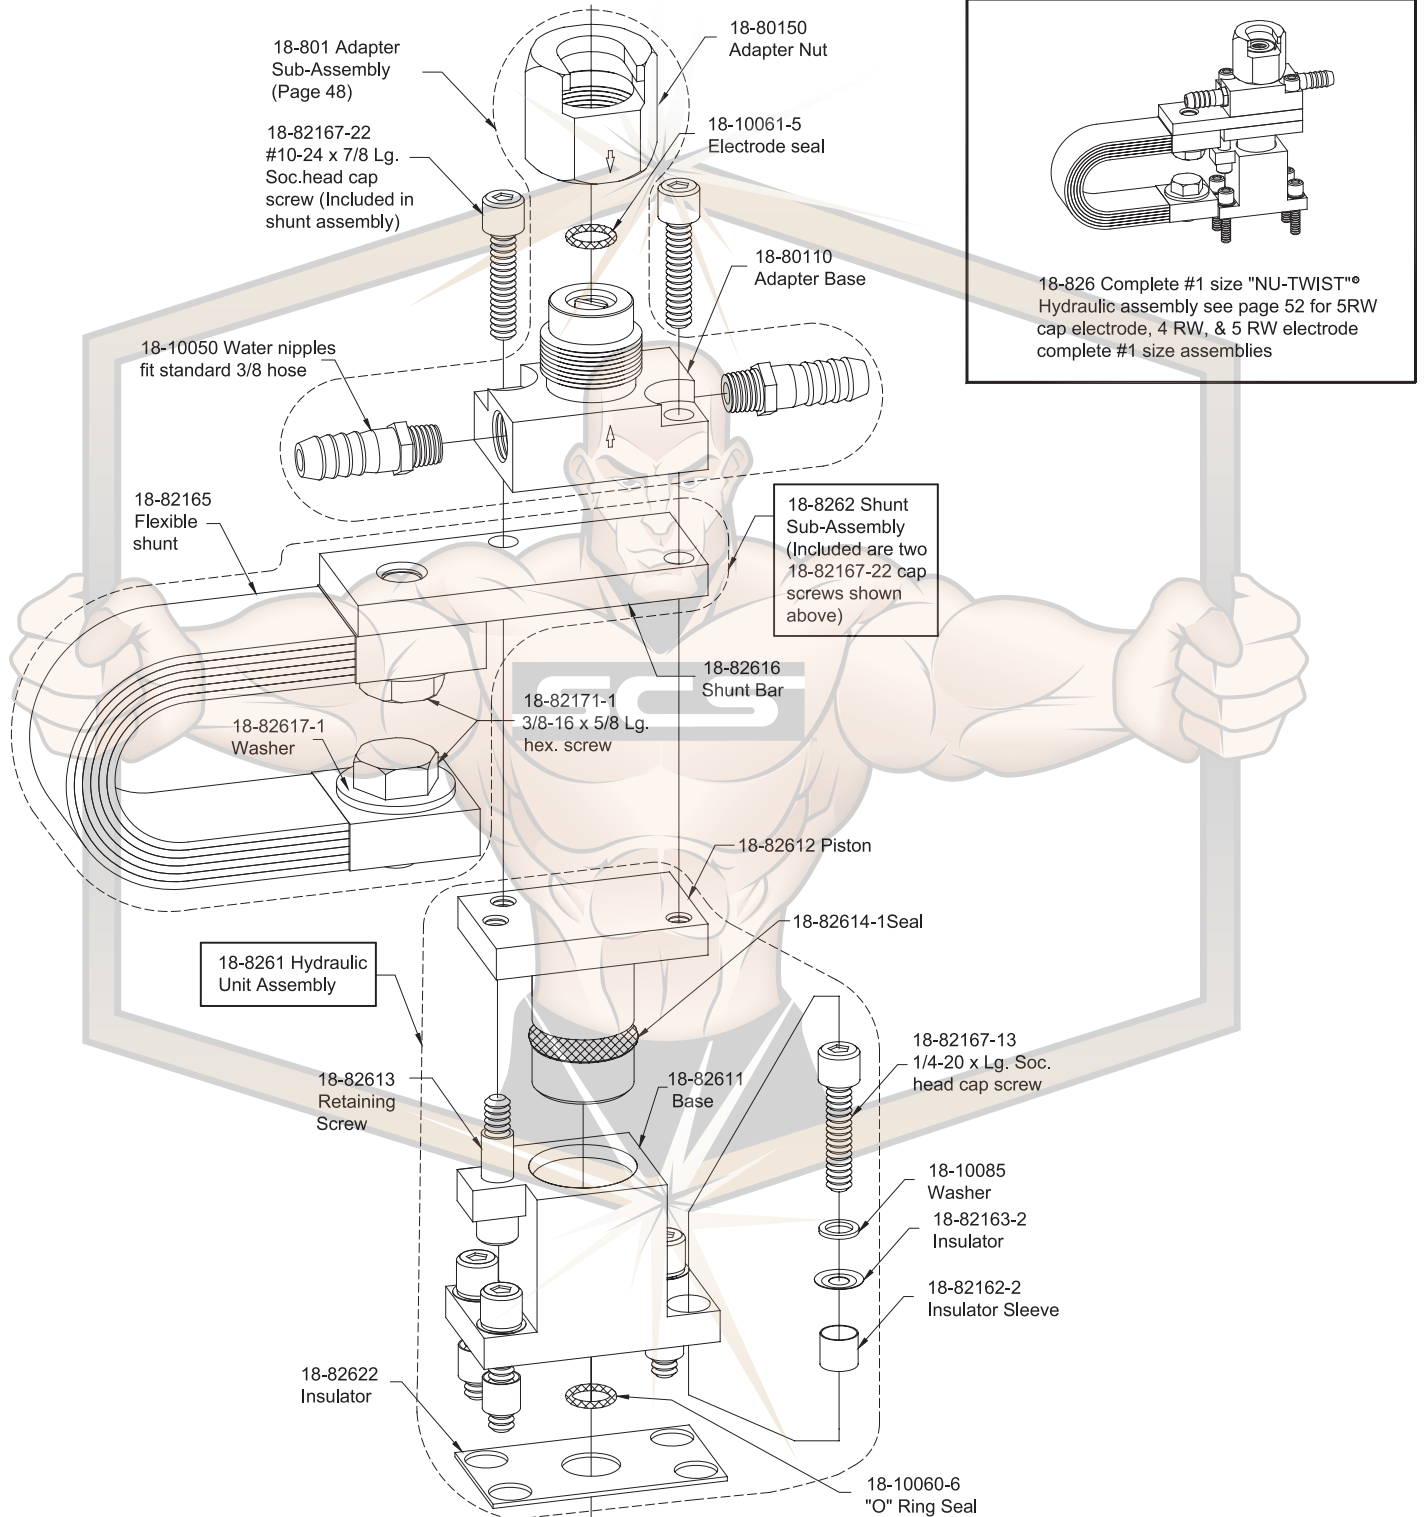

HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.


18-827 #2 SIZE UNIT WITH "NU-TWIST"® SHOWN

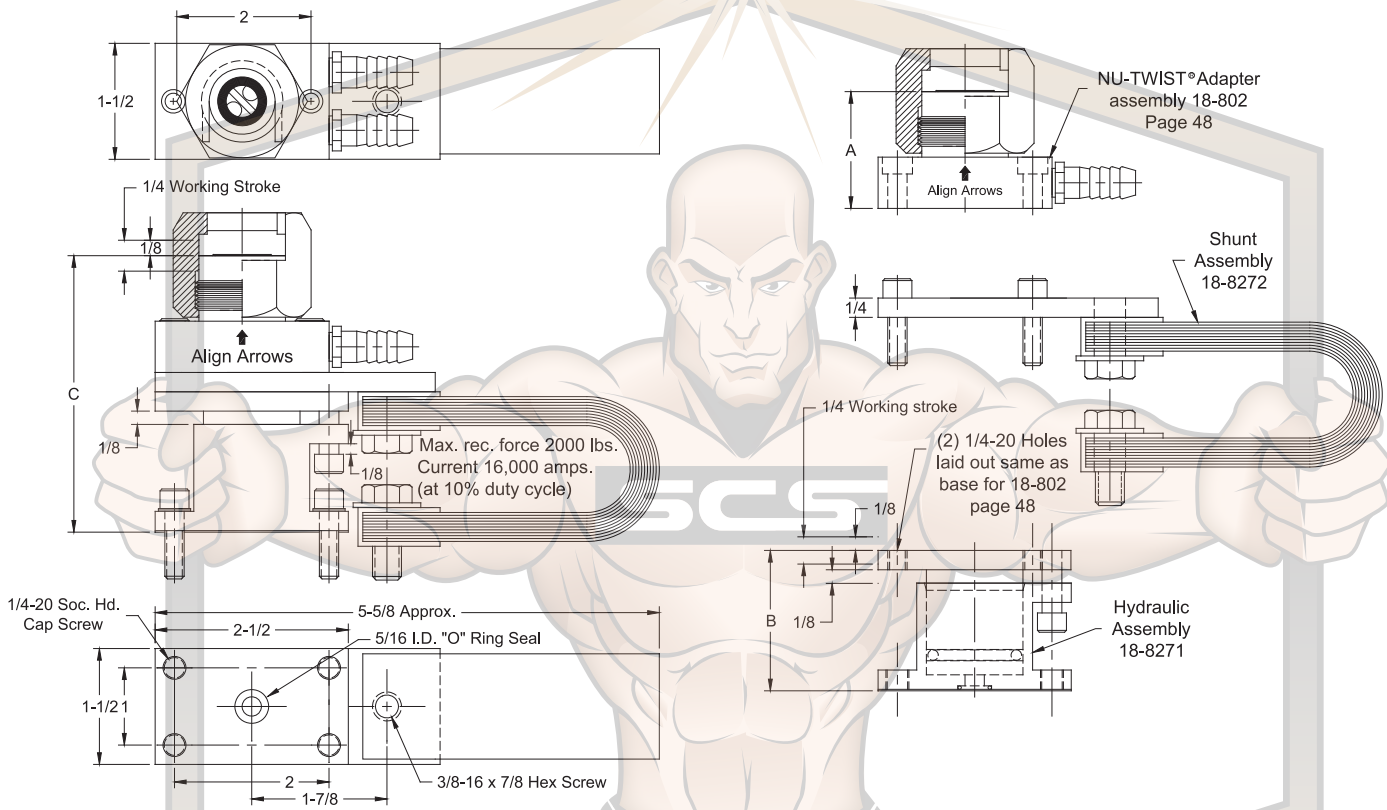

Complete Unit Part No.	Unit Size.	Electrode Attachment	Height A	Mean Height B	Mean Electrode Base Height C
18-827	#2	NU-TWIST	1-13/16	1-49/64	3-53/64

HYDRAULIC EQUALIZING ADAPTERS AND ASSEMBLIES


18-827 COMPLETE #2 SIZE "NU-TWIST" ASSEMBLY

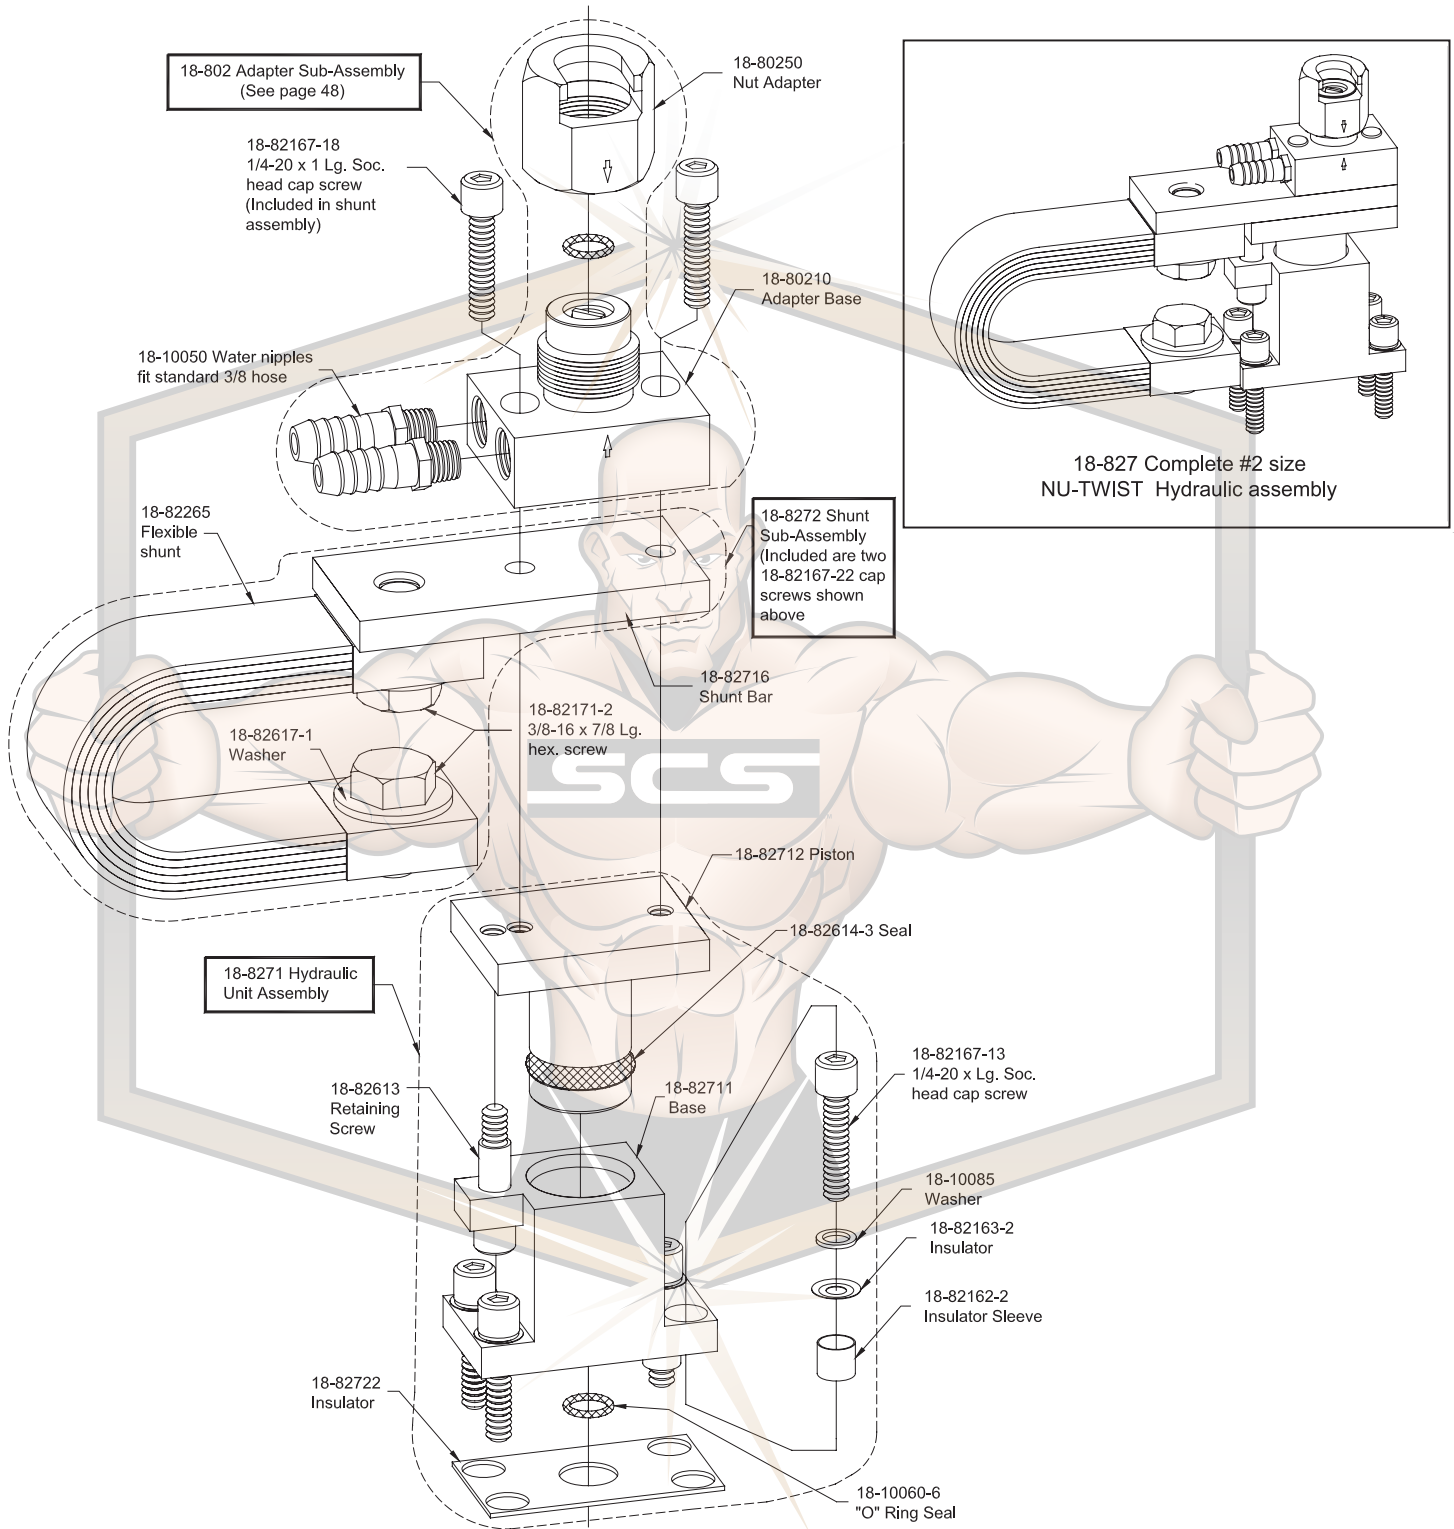

FIXED UNIT HYDRAULIC EQUALIZING ASSEMBLIES

CMW Hydraulic Equalizing adapter units are used to equalize the weld force when two or more welds are required simultaneously. The equalizing action is developed in a closed hydraulic system - and is accomplished by hydraulically interconnecting two or more units. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

TWO #1 OR #2 SIZE HYDRAULIC UNITS MOUNTED TO CUSTOMER'S DESIRED ELECTRODE SPACING.*

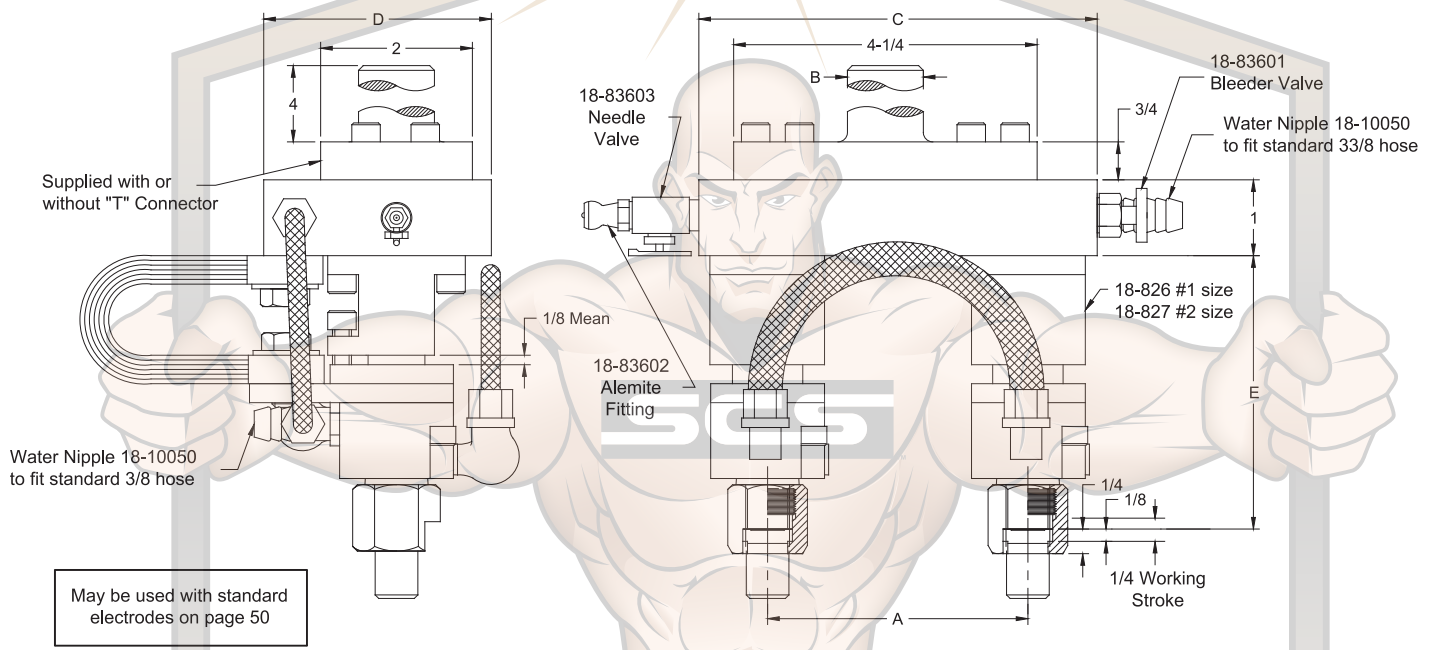

Assembly Unit Part No.	Unit Size	"T" Connector Shank Dia. B	Base Plate Length C	Base Plate Width D	Spacing* (Specify on Order) A	Max. Recommended Weld force Per Electrode LBS	Mean Height to Electrode Base E
18-846 18-84601-01	#1	None 1"	6	3	1-1/32" to 5"	1000 (12,000 Amps @ 10% duty cycle)	3-13/64
18-84601-02 18-84601-03		1-1/4" 1-1/2"					
18-847 18-84701-01	#2	None 1"	7-1/2	3-1/2	1-3/4" to 6"	2000 (16,000 Amps @ 10% duty cycle)	3-61/64
18-84701-02 18-84701-03		1-1/4" 1-1/2"					

Note:

- Multiple units of 2-8 can also be supplied on custom designed base plates with or without "T" Connectors.
- Units may be modified with adapters for RW tapered caps and electrodes


ADJUSTABLE HYDRAULIC EQUALIZING ASSEMBLY 18-836



SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

ADJUSTABLE HYDRAULIC EQUALIZING ASSEMBLY 18-836

Part No. 18-836 (shown below) is a typical assembly using two 18-826 assemblies set up as a complete self-contained unit for making two spot welds at one time. **This unit is so arranged as to allow the center distances to be readily adjusted from 1-3/32" centers to 2-1/4" centers or by rearrangement of the same parts centers may be adjusted from 2-1/4" to 3-1/2"**. This setup also include facilities for filling and bleeding the hydraulic units. "T" Mounting 18-83614 is available to order for assembly 18-836. We recommend using fire resistant hydraulic fluid compatible with BUNA "N" such as HOUGHTO-SAFE #620, 1120 or equivalent. Consult your local industrial lubricant distributor.

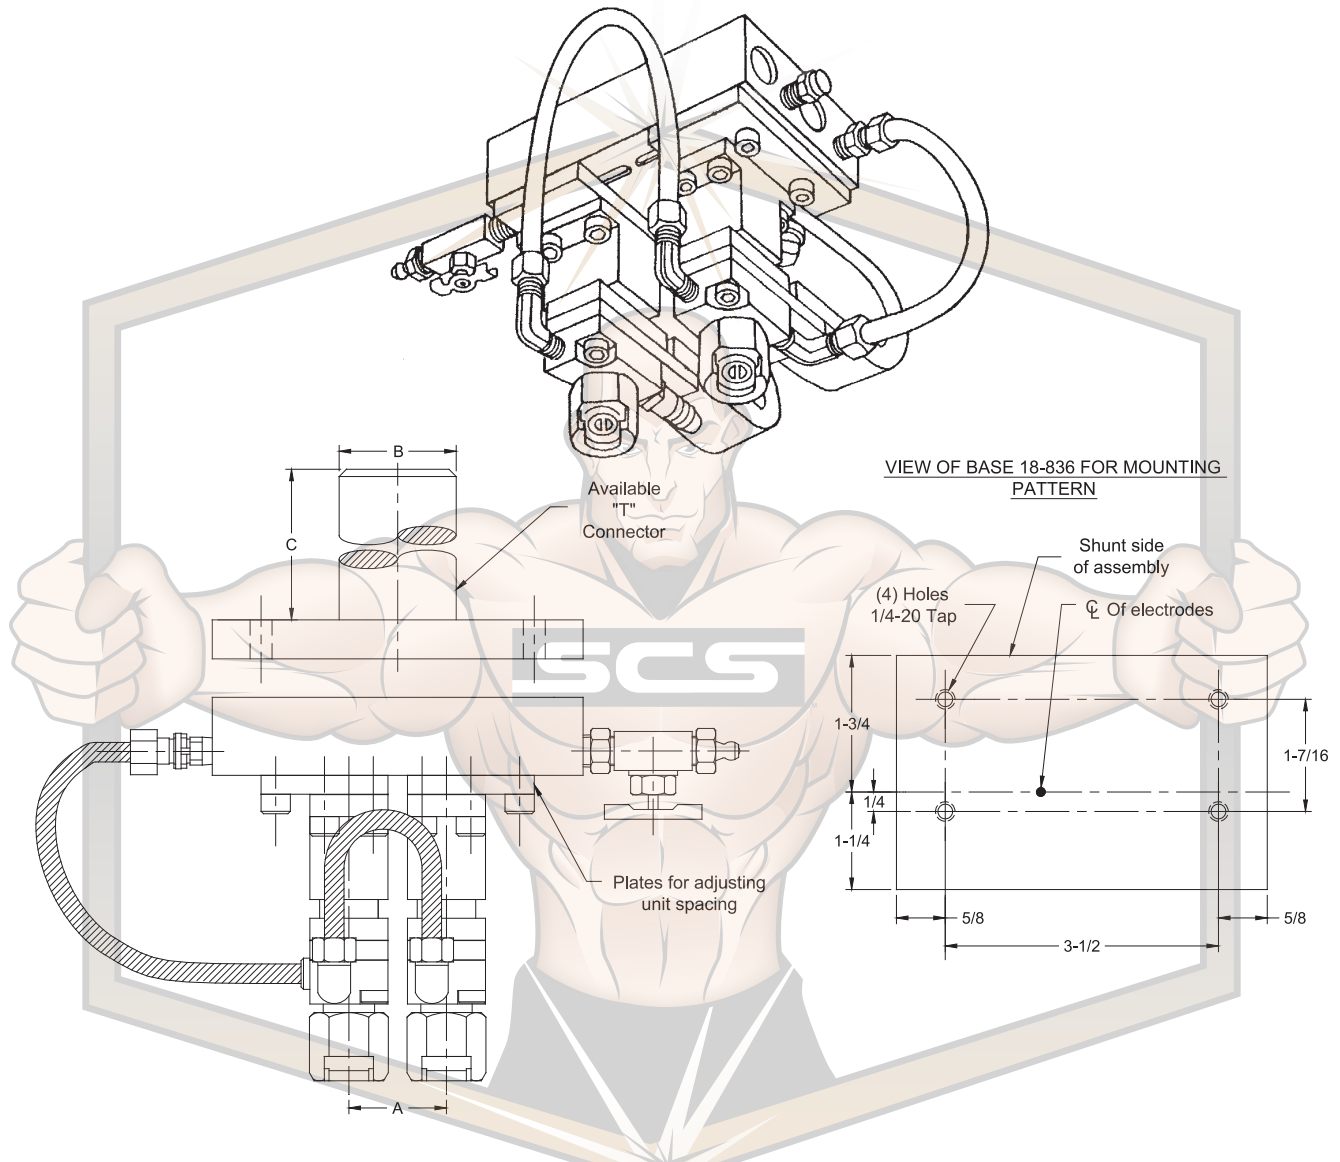

Assembly Part No.	Hydraulic Unit Size	Electrode Attachment ***	Adjustable Spacing Range A	"T" Connector	Max. Recommended Weld force Per Electrode LBS	
18-836	#1	#1 NU-TWIST®	1-1/32 - 2-1/4 2-1/4 - 3-1/2*	NONE	1000 (12000 AMPS @ 10% Duty Cycle)	
				Available	Dia. B	Length C
				18-83614-01	**	4
				18-83614-03	**	**

* Partial disassembly, rearrangement of plates, and bleeding of unit will be necessary to switch centerline ranges.


** Customer must specify dimensions desired.

*** Other attachments available on request



SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS

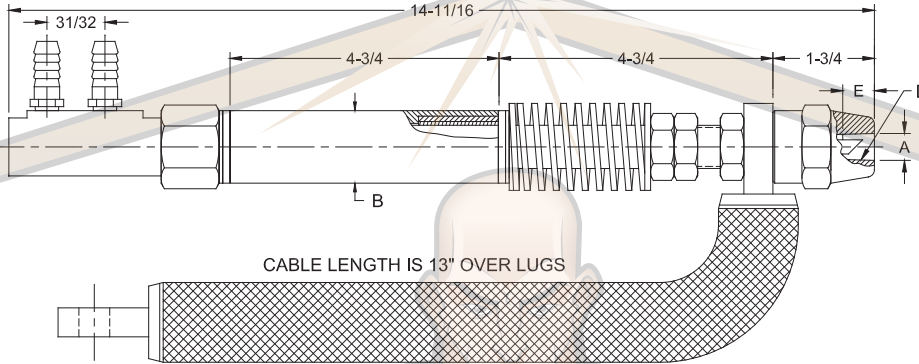


Like other low-inertia holders the heavy duty Adjust-A-Pressure Holders are used for multiple spot and projection welding, and are excellent for indirect welding when mounted in the Adjust-A-Angle Adapter.

Electrical current is conducted through heavy flexible cables and holder is installed to prevent any damaging effects to the spring mechanism. Light duty springs supplied to order.

Part No. Holder Assy.*	Major Taper Dia. A	Barrel Dia. B	Taper D	Standard Electrode Taper Engagement E	Pressure Range (Pounds)
18-1101	.463	1-1/4	4 RW	1/2	to 500
18-1102	.625	1-1/4	5 RW	3/4	
18-1103	.463	1-1/2	4 RW	1/2	to 1000
18-1104	.625	1-1/2	5 RW	3/4	


* Standard holder uses 18-110006-1 spring. A heavy duty holder is available with spring 18-110006-2 for pressure to 1000 lbs. For additional holder information and replacement parts see page 59.

1150 SERIES ADJUST-A-ANGLE ADAPTERS

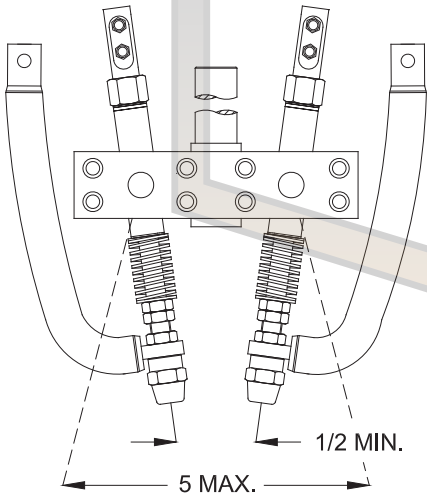

1100 SERIES HOLDERS ASSEMBLED IN 1150 SERIES ADAPTER

1150 SERIES ADJUST-A-ANGLE ADAPTERS ARE ADAPTABLE FOR USE WITH SPRING TYPE LOW INERTIA HOLDERS 1100 SERIES AS WELL AS STRAIGHT HOLDERS 100, 200, AND 300 SERIES.

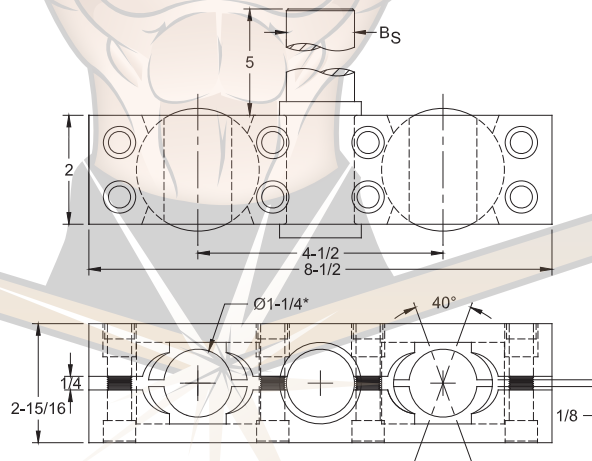

Adapter Assembly Part No.	Shank Dia. BS
18-1154	1
18-1155	1-1/4
18-1156	1-1/2


* Adapters for barrel sizes other than 1-1/4 dia. available as special order

1100 SERIES ADJUST-A-PRESSURE HOLDER REPLACEMENT PARTS



SOUTHERN COPPER & SUPPLY
 COMPANY, INC.
 800-289-2728

1100 SERIES ADJUST-A-PRESSURE WATER COOLED LOW INERTIA ELECTRODE HOLDERS

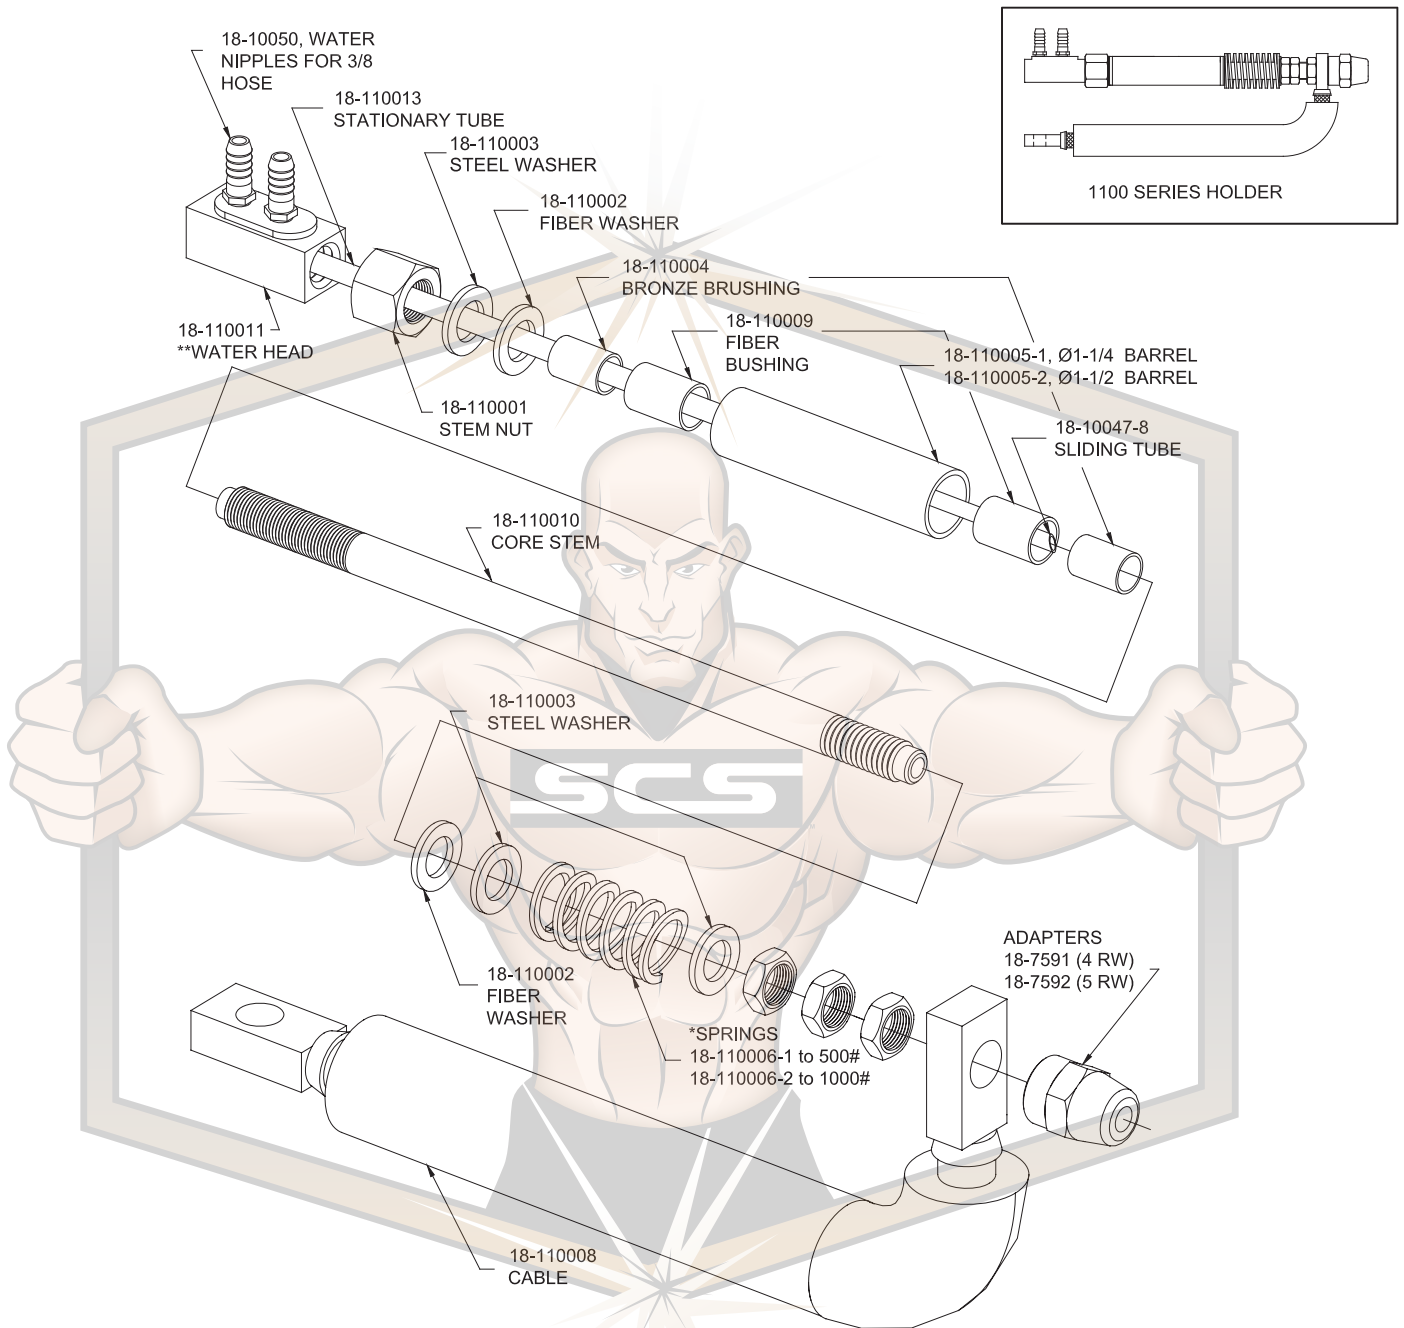

** INCLUDES 18-110013, 18-10050, 18-10047-8

* SPRINGS: 500# SPRING IS PAINTED BLUE; 1000# SPRING IS PAINTED YELLOW


Part No. Holder Assy.*	Barrel	Adapter	Adjust -A- Angle Adapters
18-1101 18-1102	18-110005-1	18-7591 18-7592	Select from 1150 Series Chart page 58
18-1103 18-1104	18-110005-2	18-7591 18-7592	Special order

* See page 58 for more information





APPLICATION SHEET FOR TYPICAL MULTIPLE SPOT WELDING SETUPS

Typical Set Up For
 3 Spots at a time in Parallel

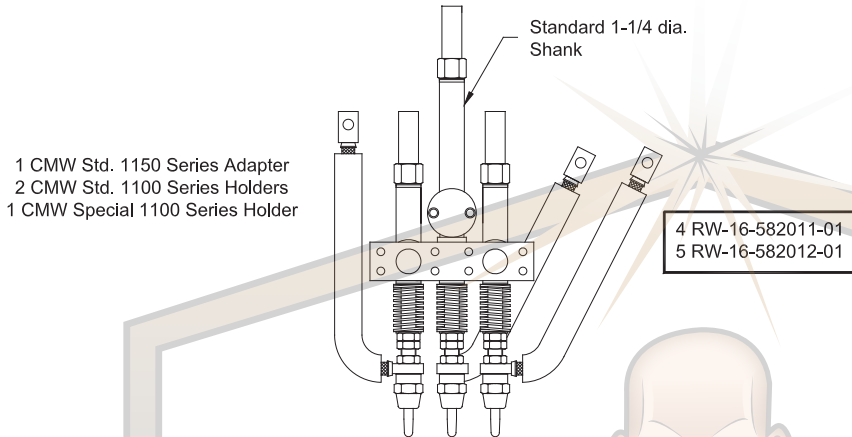

Typical Set Up For
 2 spots simultaneously
 in parallel

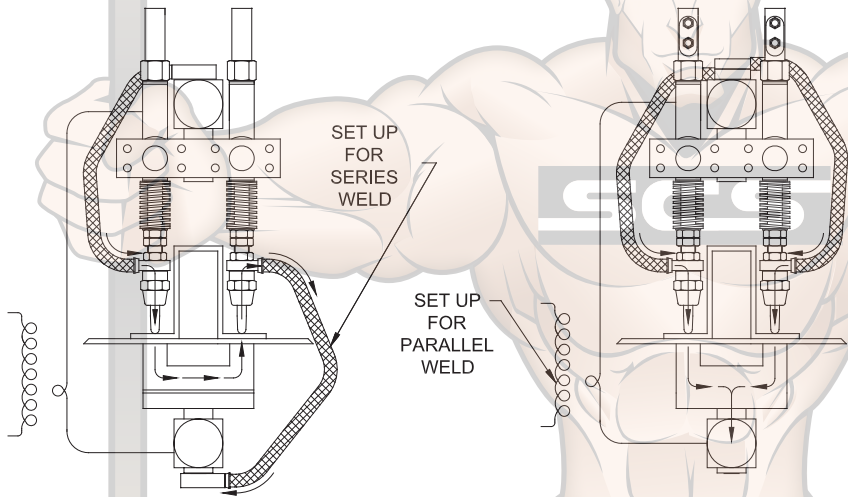


- Upper
 - 2-1100 Series Holders
 - 1-1150 Series Adapter
- Lower
 - 2-100,200 or 300 Series Holders
 - 1-1150 Series Adapter with special center shank


Contact Factory
 All above items
 priced and made
 to special order
 Illustrations
 only

TYPICAL SET UP OF 800 SERIES "NU-TWIST"® UNITS

For dual spot welding using hydraulic "Nu-Twist"® Pressure equalizing subassemblies and surface mounted adapters as basic building blocks

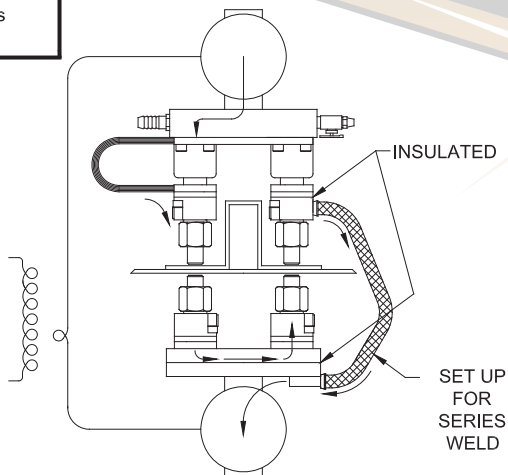




- Upper
 - two
 - 18-826
 - hydraulic
 - unit assemblies
 - mounted on
 - fixed centers
 - (See Pages
 - 52, 53, 56)
- Lower
 - two
 - 18-801
 - surface
 - mounted
 - "Nu-Twist"®
 - Adapters
 - (See page 48)

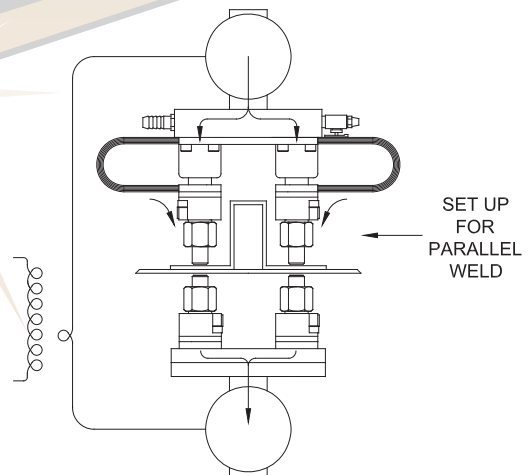

PLATEN MOUNTED ELECTRODE HOLDERS



The CMW Platen Mounted Holder, as shown below, has the inlet water nipple at position #1 and the outlet water nipple at position #2, any other combinations may be special ordered by changing the last two digits of the part number. The first of the last two digits indicates the location of the inlet nipple and the second digit indicates the location of the outlet nipple. Example; part No. 18-0510-56 would place the inlet water nipple at position #5 and the outlet water nipple at position #6.

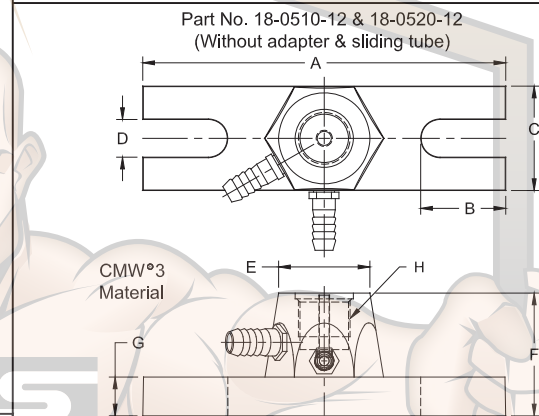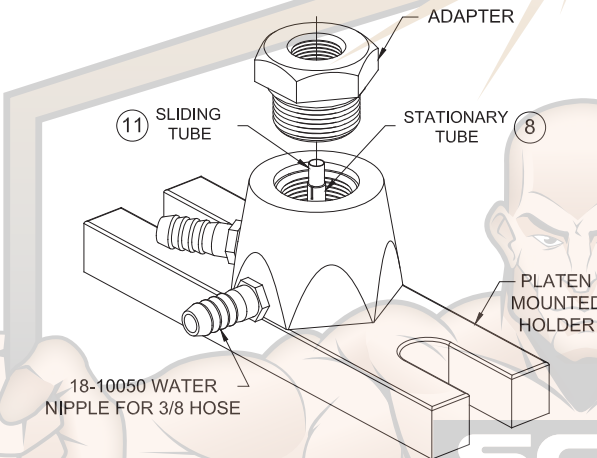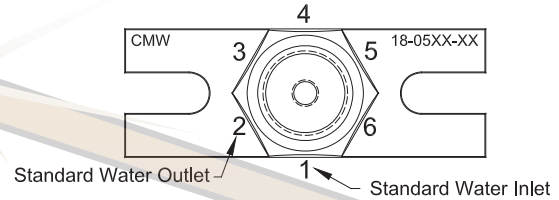

Order one of each for your application		Order as required											Thread
Holder Part No.	Adapter Part No.	Attachment Type	Stationary Tube 8	Sliding Tube 11	Sliding Length	Overall Length A	Slot Depth B	Width C	Slot Width D	Top Dia. E	Overall Height F	Base Height G	
18-0510-12	18-785	4RW	18-40041-5	18-50041-3 18-50041-2	1-3/8 2-1/2	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	1-14 UNF
18-0520-12	18-785	4RW	18-40041-5	18-50041-3 18-50041-2	1-3/8 2-1/2	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-786	5RW	18-40041-5	18-40043-11 18-40043-5 18-40043-9	1-3/8 2 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-786	5RW	18-40041-5	18-40043-11 18-40043-5 18-40043-9	1-3/8 2 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-7863	6RW	18-40041-5	18-40043-14 18-40043-9	2-1/8 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-7863	6RW	18-40041-5	18-40043-14 18-40043-9	2-1/8 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-787	7RW	18-40041-5	18-40043-15 18-40043-9	2-3/8 4	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
18-0520-12	18-787	7RW	18-40041-5	18-40043-15 18-40043-9	2-3/8 4	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
18-0510-12	18-812	#2 SIZE Nu-Twist®	18-40041-5	-	-	4-1/4	1	1-1/2	1/2	1-23/64	2-1/8	1/2	
	18-7743**	5/8-18 THD.											
18-0520-12	18-812	#2 SIZE Nu-Twist®	18-40041-5	-	-	7	1-5/8	2	3/4	1-49/64	2-3/8	3/4	
	18-7743**	5/8-18 THD.											



**Adapter for 1" dia. & 1-1/4 dia. Chameleon/Max-Life™ projection welding electrodes and 18-811 #1 size threaded "NU-TWIST"® adapter.

MULTI-SPOT WELDER ELECTRODE ADAPTERS

CMW electrode adapters for multispot air or hydraulic pistons are supplied with 3/4 diameter straight piston rod ends. These adapters are equipped with means for attaching the welding cable from the transformer and the water hoses to the inlet and outlet water connections.

These adapters are available in four basic assemblies as shown in the table.





MULTI-SPOT WELDER ELECTRODE ADAPTER REPLACEMENT PARTS

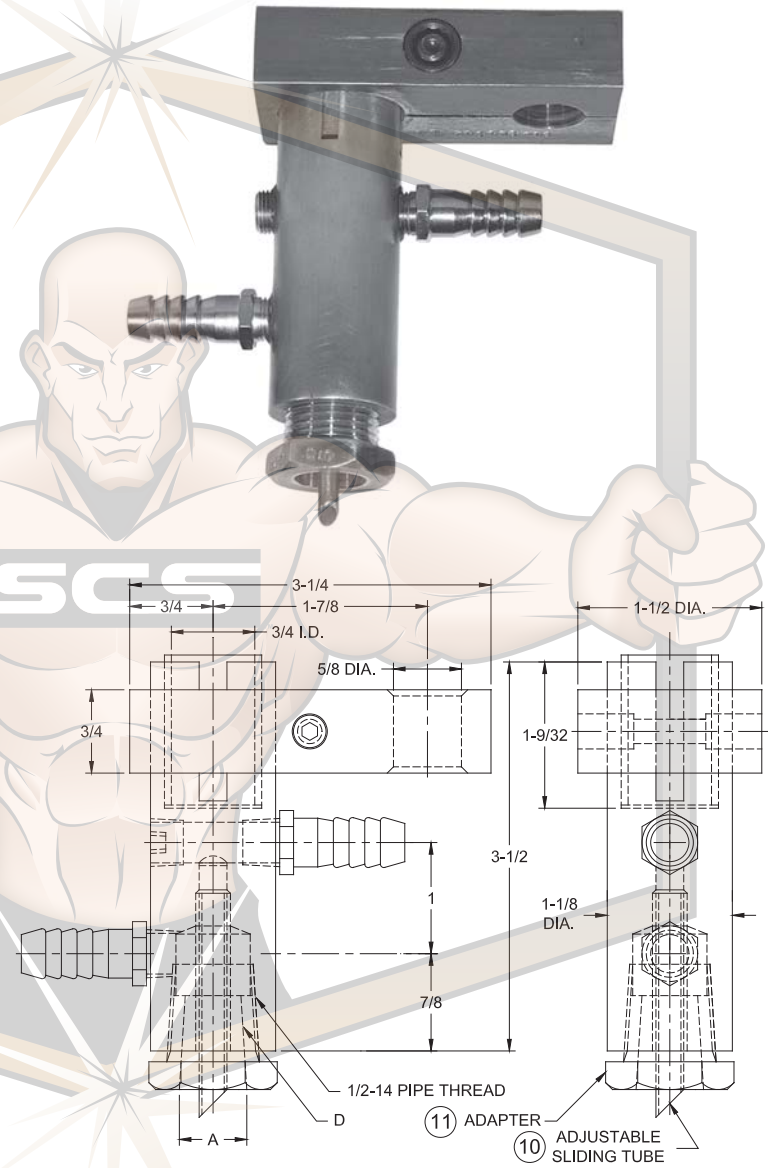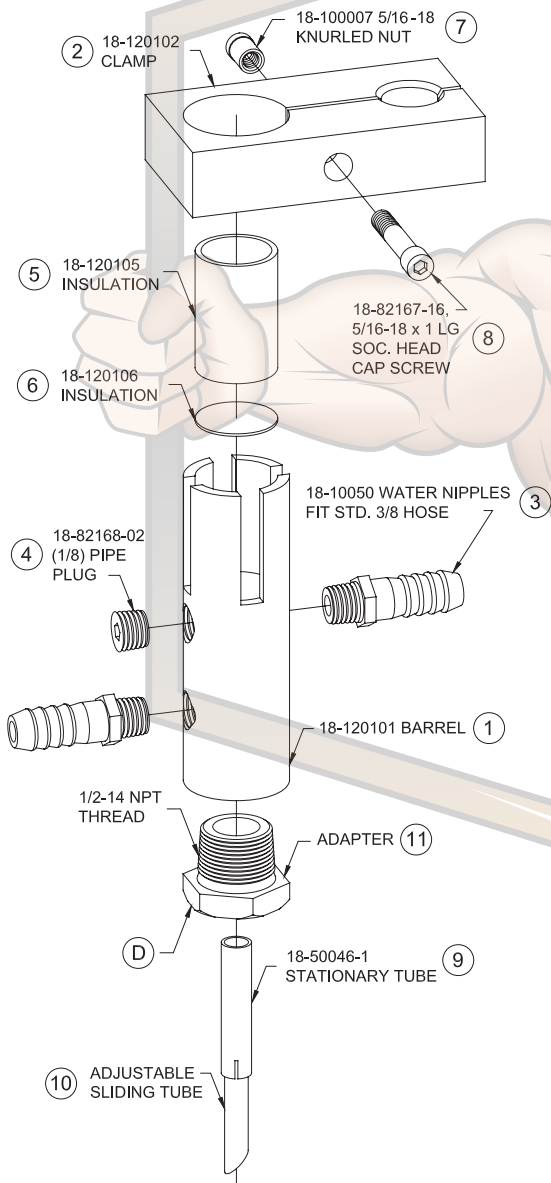


Part No. Assembly	Major Tape Dia. A	Attachment Type D	Adjustable Sliding tube 10	Adapter Part No. 11*
18-1201	--	1/2-14 NPT	18-10046-23	--
18-1202	.414	5 RW Male cap	--	18-7465-07
18-1203	.463	4 RW	18-10046-23	18-746-07
18-1204	.625	5 RW	18-10046-23	18-747-07

All assemblies include items 1, 2, 3, 4, 5, 6, 7, 8, and 9.
* See page 31 for adapter details.


WELDING MACHINE CONTROL CONTACTORS

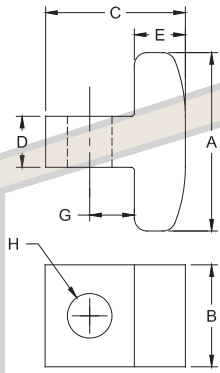




16-1303
 CMW[®]353

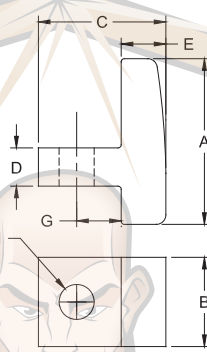


16-1304
 CMW[®]353



16-1306
 CMW[®]353

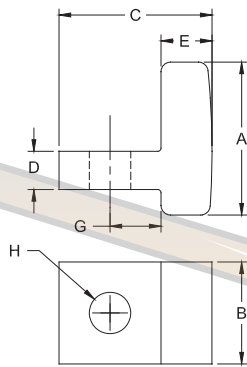

16-1307
 CMW[®]353



16-1309
 CMW[®]353

For use primarily in resistance welding controls CMW maintains standard stocks of five contactors listed. They consist of CMW[®]353 material, a predominantly copper alloy possessing arc resisting properties.

CMW[®]353 material has the ability to interrupt the current in a short time with minimum arc hangover. Because of the arc resistant characteristics of the metal, only the desired number of cycles of current are transmitted to the welding machine. Uniform welding quality is obtained because no additional current passes through the control, since CMW[®]353 material tends to prevent the arc from restriking.

Contactor Part No.	Overall Length	Width		Height	D	E	G	Hole Dia. H
	A	B	C					
16-1303	1-3/4	1	1-3/8	1/2	1/2	7/16	7/16	11/32
16-1304	1-5/8	7/8	1-1/4	3/8	7/16	7/16	7/16	11/32
16-1306	1-5/16	3/4	1-1/16	5/16	3/8	3/8	3/8	11/32
16-1307	1-1/2	1	1-1/2	3/8	1/2	1/2	11/32	11/32
16-1309	1-1/4	7/8	1-1/4	3/8	7/16	15/32	25/64	25/64

EXAMPLE: 16-1303



ACCESSORIES, REAMERS, WATER HOSE, HOSE CONNECTOR, HOSE COUPLING & HOSE CLAMP

REAMERS

High speed steel reamers to rework worn tapers in holders are available for standard 4, 5, 6, 7 RW, and 4, 5, 6 RW cap tapers. Hollow reamers make it possible to recondition worn holder tapers without removing the water tubes.

Reamer Part No.	Taper Type	Type
18-1321	6 RW	Hollow
18-1322	4 RW	Not Hollow
18-1323	5 RW	Hollow
18-1324	7 RW	Hollow
18-1327	4 RW (Cap taper)	Not Hollow
18-1328	5 RW (Cap taper)	Not Hollow
18-1329	6 RW (Cap taper)	Not Hollow

REAMER



WATER COOLING HOSE (PART NUMBER 18-1350)

CMW water-cooling hose is the finest available. Made by a prominent hose manufacturer. This hose is 3/8 diameter which properly fits the water nipples on CMW holders. It is available in 50-foot coils or can be cut to length.


COOLING-WATER HOSE 18-1350



HOSE CONNECTOR FOR 3/8 HOSE (PART NUMBER 18-1351)

This hose connector, placed in water-cooling hose line, facilitates quick change of holders or dies. The male and female ends of these connectors should be reversed in the inlet and outlet lines to eliminate confusion in changing setups.


HOSE CONNECTOR



QUICK CONNECTIVE COUPLING ASSEMBLY (PART NUMBER 18-1352)

The plug of this coupling can be mounted on CMW holders converting them for quick hose changes. An automatic water shut-off valve is built into the coupling.

HOSE COUPLING



FEMALE SOCKET
(1/8 FEMALE PIPE THREAD)
18-135200-1



MALE PLUG
(1/8 MALE PIPE THREAD)
18-135200-2



HOSE CLAMP (PART NUMBER 18-1353)

This aircraft type hose clamp gives positive tightening action which eliminates water leakage. It is easy to install and remove from standard 3/8 water hose.


HOSE CLAMP



CAP ELECTRODE EXTRACTOR FORK

CAP ELECTRODE EXTRACTOR FORK
PART NO. 18-1381-1 FOR 5 RW CAPS
PART NO. 18-1381-2 FOR 4 RW CAPS
PART NO. 18-1381-3 FOR 6 RW CAPS


These hardened steel wedge type forks will make the removal of electrodes caps quick and easy. They can be used on both male and female caps.

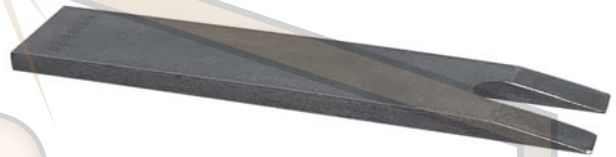


AIR POWERED ELECTRODE EXTRACTOR

AIR POWERED ELECTRODE EXTRACTOR
PART NO. 18-1382-1 FOR 6 RW ELECTRODES
PART NO. 18-1382-3 FOR 5 RW ELECTRODES

This high quality air powered electrode extractor comes in two standard sizes for extracting 5 RW and 6 RW male and female cap and standard straight electrodes. Air pressure recommendations suggested between 85 PSI minimum and 100 PSI maximum. Ideal pressure is 90 PSI. Standard 3/8 diameter air nipple and quick change plug included with extractor.

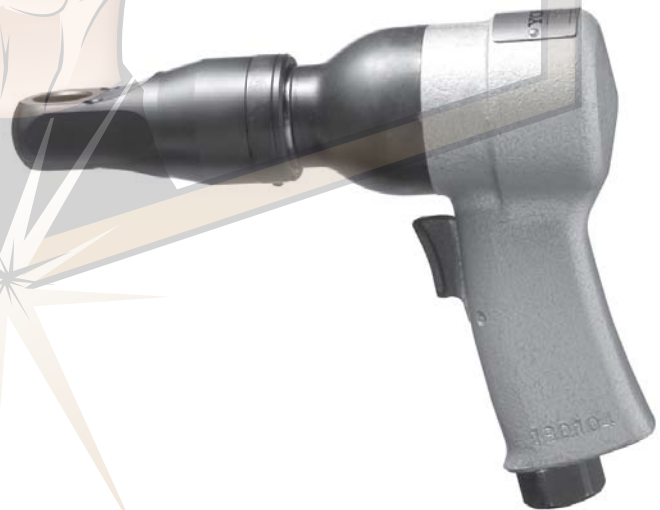

PNEUMATIC POWER HANDLE ELECTRODE DRESSER PART NO. 18-1310

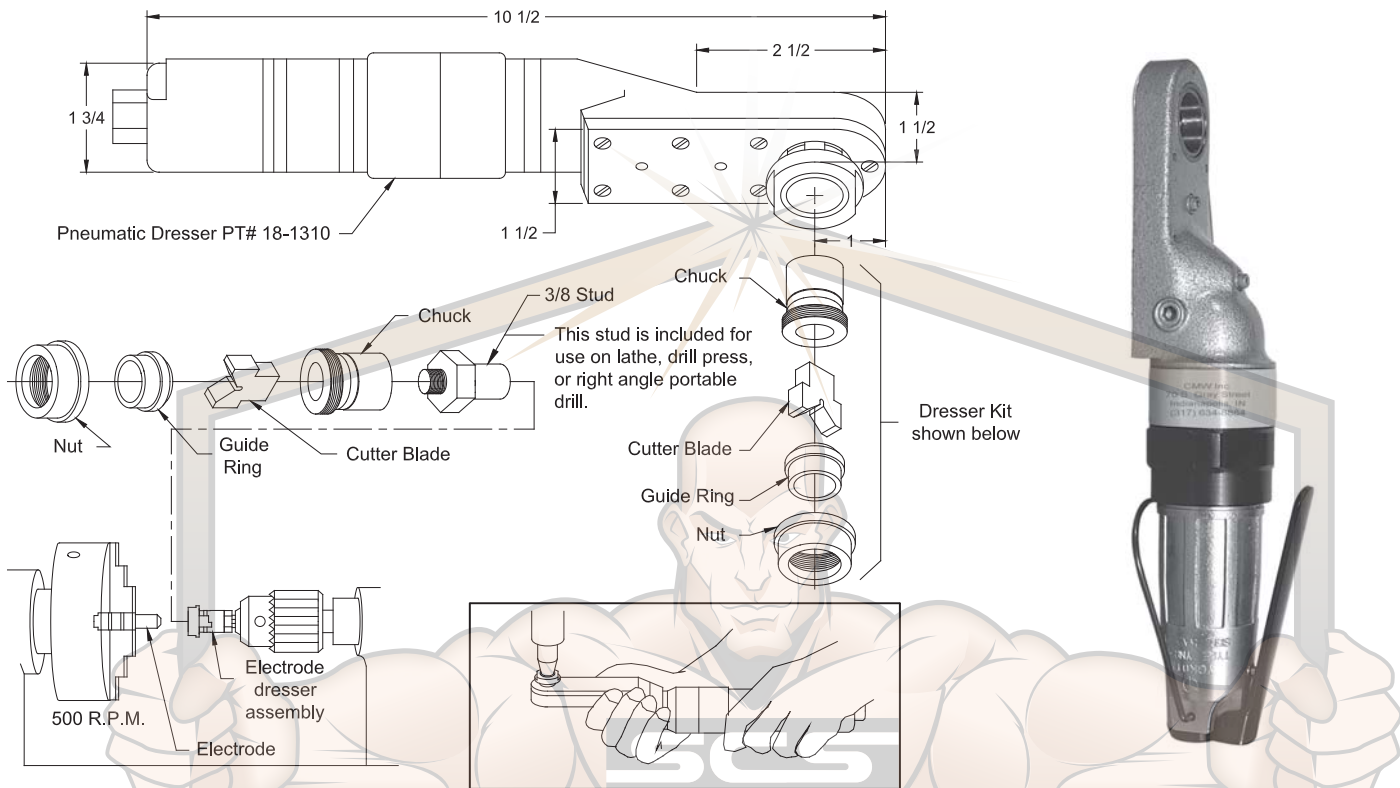

Light weight and rugged construction, this CMW Pneumatic Power Handle requires a clearance of only 1-1/2" with a standard ring and 2" with an extended ring. In most situations this allows dressing of electrodes without removal from the welder. Operating at a cutting speed of 1200 rpm, it enables the operator to dress electrodes quickly and accurately. Cutters and guide rings are easily replaced. These must be matched to the electrode nose and are selected from the chart below.

CMW Electrode Dresser 18-1310 is supplied without blade holder, ring, and cutter blade. When ordering, specify the "Kit" appropriate for your dressing needs as selected from the table below. "The stud" furnished with the kit is not required when using the Pneumatic Power Handle. It may optionally be used, but will increase the clearance required on the welder for dressing. Additional special cutters can be furnished upon special request.

These kits may also be used for cap electrode dressing.

Size To Dress									
4 RW .482 Dia	Nose style CMW Electrode No.	Dome x11x..	Pointed x21x..	Flat x31x..	2" Radius x51x..	3" Radius x81x..	4" Radius x91x..	10" Radius x61x..	Truncated x71x..
	Kit to Order**	18-1390411	18-1390420	18-1390410	18-1390413	18-1390414	18-1390415	18-1390416	18-1390412
	Replacement Blade Replacement Guide Ring (Each for above kit)	18-139411 18-139401	18-139420 18-139402	18-139410 18-139401	18-139413 18-139401	18-139414 18-139401	18-139415 18-139401	18-139416 18-139401	18-139412 18-139401
5 RW .625 Dia	CMW Electrode No.	x12x..	x22x..	x32x..	x52x..	x82x..	x92x..	x62x..	x72x..
	Kit to Order**	18-1390511	18-1390520	18-1390510	18-1390513	18-1390514	18-1390515	18-1390516	18-1390512
	Replacement Blade Replacement Guide Ring (Each for above kit)	18-139511 18-139501	18-139520 18-139502	18-139510 18-139501	18-139513 18-139501	18-139514 18-139501	18-139515 18-139501	18-139516 18-139501	18-139512 18-139501


** Note: This kit includes Stud for (for 3/8 Keyed Chuck), Chuck, 1 Guide Ring, 1 Appropriate blade, and Retaining Nut.

Note: Cutters are **NOT** designed to conform to "Electrode Cap" geometries. Caps are intended for value salvage when expended.

ELECTRODE DRESSER PART NUMBER 18-1307

ELECTRODE DRESSER PART NUMBER 18-1307

The Electro Dresser quickly removes the "mushroomed" portions of spot welding electrodes and **renews 4 RW or 5 RW taper, dome or pointed electrodes with the proper operating contour.** The Electro Dresser re-machines both upper and lower electrodes to the correct profile "On The Job" - provided both are identical - without removal of the electrodes from their holders. Dresser is 10" long, with a replaceable cutter of hardened tool steel.



ORDER REPLACEMENT CUTTERS - 18-130701
ORDER REPLACEMENT HANDLE - 18-130702

ELECTRODE DRESSER PART NUMBER 18-1370

ELECTRODE DRESSER PART NUMBER 18-1370


In certified resistance welding and where clean, strong welds are necessary on a production basis the Maintain-A-Contour Dresser pays big dividends. Its use not only assures consistent quality welds in aircraft metals, but saves valuable production time in all dressing operations.

The Maintain-A-Contour Dresser is supplied with a spool of 240 grit cloth, and one set of (2 per set) precision ground contour plates. **Specify the size radius (2" - 3" - 4" - 6" - 8" - 10") plates required.**

Plates with special radii are available on special request. The abrasive cloth is standard 2" wide.




PRECISION GROUND CONTOUR PLATES

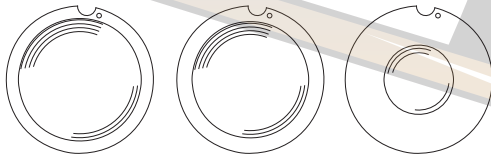

Dresser Part No.	Spherical Radius of Contour Plate	Use With	
		Contour Plates	Abrasive Cloth
18-1370	2"	18-137001	18-137009
	3"	18-137002	
	4"	18-137003	
	6"	18-137004	
	8"	18-137005	
	10"	18-137006	

18-137009
REPLACEABLE 2"
ROLL ABRASIVE
CLOTH

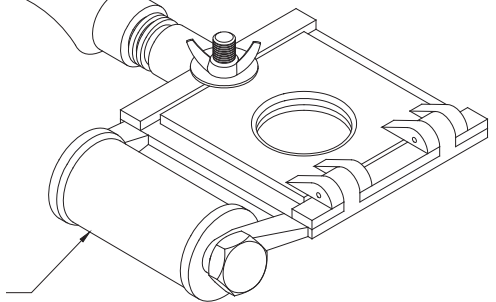



DIAMETER THK. WTH. (INCHES)	RWMA ALLOY CLASS NO.	CMW® ALLOY NO.	CMW PART NUMBER	WEIGHT/LBS.	
				INCH	FOOT
Rounds					
1/8	2	CMW®3	58704	.012	.147
1/4	2	CMW®3	58707	.016	.192
3/8	2	CMW®3	58712	.035	.420
7/16	2	CMW®3	58713	.048	.576
.482	2	CMW®3	50333	.058	.696
.482	1	CMW®28	65256	.058	.696
1/2	2	CMW®3	58715	.063	.756
1/2	1	CMW®28	64124	.063	.756
5/8	1	CMW®28	64126	.099	1.188
1/2	3	CMW®100	75836	.063	.756
5/8	2	CMW®3	58716	.099	1.188
5/8	3	CMW®100	75835	.099	1.188
3/4	2	CMW®3	58708	.142	1.704
7/8	2	CMW®3	58719	.193	2.316
7/8	3	CMW®100	75736	.193	2.316
1.0	2	CMW®3	58710	.251	3.012
1-1/4	2	CMW®3	58720	.395	4.740
1-1/4	3	CMW®100	59035	.395	4.740
1-1/2	2	CMW®3	58724	.568	6.816
1.510	2	CMW®3	52217	.570	6.840
2.0	2	CMW®3	58731	1.010	12.120
2.0	3	CMW®100	75838	1.010	12.120
2-1/2	2	CMW®3	58767	1.580	18.960
3-1/8	2	CMW®3	51235	2.470	29.640
Hex					
.250 Hex	2	CMW®3	79072	.013	.156
.375 Hex	3	CMW®100	79993	.029	.348
.438 Hex	2	CMW®3	79556	.040	.480
.438 Hex	3	CMW®100	79544	.040	.480
.500 Hex	2	CMW®3	76569	.052	.624
.500 Hex	3	CMW®100	75450	.052	.624
.625 Hex	2	CMW®3	68487	.081	.972
.750 Hex	2	CMW®3	58755	.117	1.404
.750 Hex	3	CMW®100	78781	.117	1.404
.875 Hex	2	CMW®3	58756	.160	1.920
1.000 Hex	2	CMW®3	58655	.208	2.496
1.000 Hex	3	CMW®100	55848	.208	2.496
1.125 Hex	2	CMW®3	52956	.264	3.168
1.125 Hex	3	CMW®100	79933	.264	3.168
1.250 Hex	2	CMW®3	73784	.326	3.912
1.250 Hex	3	CMW®100	67490	.326	3.912
1.500 Hex	3	CMW®100	50561	.469	5.628
Squares and Rectangles					
1/4 x 1-1/2	2	CMW®3	58881	.120	1.440
1/2 x 1/2	2	CMW®3	58766	.080	.960
5/8 x 5/8	2	CMW®3	58677	.125	1.500
1 x 1	2	CMW®3	58690	.320	3.840
1 x 1-1/2	2	CMW®3	50322	.480	5.760
1 x 2	2	CMW®3	58759	.640	7.680
1 x 3	2	CMW®3	50324	.960	11.520
1-1/2 x 3	2	CMW®3	74630	1.440	17.280
	3	CMW®353		VARIOUS SHAPES AND SIZES AVAILABLE IN THESE MATERIALS. CONSULT CMW INC. CUSTOMER SERVICE FOR PRICE AND DELIVERY INFORMATION.	
	4	CMW®73			
	5	ELKALOY®D			
	10	ELKONITE®1W3			
	11	ELKONITE®10W3			
	12	ELKONITE®30W3			
	13	ELKON®100W			
	14	ELKON®100M			

ELKONITE® BAR STOCK

TYPICAL PROPERTIES OF ELKONITE® MATERIALS

(See CMW Inc. Catalog Series 200)

Elkonite® Material	Composition % by Weight	Density		Electrical		Theoretical		Hardness (Rockwell)	Modulus of Rupture In Bending		ASTM Specification
		g/cm ³ or (Mg/m ³)	lb/in ³	Conductivity % IACS	Resistivity (n-ohm-m)	Thermal Conductivity Btu-h ⁻¹ -ft ⁻¹ -F ⁻¹	Conductivity (W-m ⁻¹ -K ⁻¹)		psi	(MPa)	
1W3	55W:45Cu	12.50	.452	53	(32.5)	180	(310)	77HRB	110.000	(758)	B702
3W3	68W:32Cu	13.93	.503	50	(34.5)	160	(280)	90HRB	130.000	(896)	B702
5W3	70W:30Cu	14.18	.512	48	(35.9)	160	(280)	95 HRB	140.000	(965)	B702
10W3	75W:25Cu	14.84	.536	45	(38.3)	150	(260)	98 HRB	150.000	(1030)	B702
10W53	75W:25Cu*	14.79	.534	28	(61.6)	85	(150)	109 HRB	200.000	(1380)	B702
30W3	80W:20Cu	15.56	.562	41	(42.1)	145	(250)	103 HRB	170.000	(1170)	B702
TC5	50WC:50Cu	11.26	.408	45	(38.3)	170	(290)	94 HRB	160.000	(1100)	-
TC10	56WC:44Cu	11.64	.421	42	(41.0)	160	(280)	100 HRB	180.000	(1240)	-
TC20	70WC:30Cu	12.65	.457	30	(57.5)	140	(240)	37 HRC	200.000	(1380)	-

*Cu Alloy 10W53 FULLY HEAT TREATED

ELKONITE® 10W3 ROUND BARS—8 INCH LENGTH


FINISHED DIAMETER	PART NUMBER	FINISHED DIAMETER	PART NUMBER
1/8	15-140200-64	3/4	15-141200-64
3/16	15-140300-64	7/8	15-141400-64
1/4	15-140400-64	1	15-141600-64
5/16	15-140500-64	1-1/8	15-141800-64
3/8	15-140600-64	1-1/4	15-142000-64
7/16	15-140700-64	1-3/8	15-142200-64
1/2	15-140800-64	1-1/2	15-142400-64
9/16	15-140900-64	1-3/4	15-142800-64
5/8	15-141000-64	2	15-143200-64

ELKONITE® 10W3 RECTANGULAR BARS—8 INCH LENGTH

SIZE-INCHES			SIZE-INCHES			SIZE-INCHES		
THICK	WIDTH	PART NUMBER	THICK	WIDTH	PART NUMBER	THICK	WIDTH	PART NUMBER
1/8	1/8	15-140202-64	5/16	5/16	15-140505-64	1/2	1-1/2	15-142408-64
	1/4	15-140402-64		3/8	15-140605-64		2	15-143208-64
	5/16	15-140502-64		1/2	15-140805-64		4	15-146408-64
	3/8	15-140602-64		5/8	15-141005-64		5/8	15-141010-64
	1/2	15-140802-64		3/4	15-141205-64	3/4	15-141210-64	
	5/8	15-141002-64		1	15-141605-64	1	15-141610-64	
	3/4	15-141202-64		1-1/4	15-142005-64	5/8	1-1/4	15-142010-64
	1	15-141602-64		1-1/2	15-142405-64	1-1/2	15-142410-64	
	1-1/4	15-142002-64		2	15-143205-64	2	15-143210-64	
	1-1/2	15-142402-64		4	15-146405-64	4	15-146410-64	
	2	15-143202-64		3/8	15-140606-64	3/4	15-141212-64	
	4	15-146402-64		1/2	15-140806-64	1	15-141612-64	
	3/16	3/4		15-141203-64	5/8	15-141006-64	1	15-141616-64
1/4	1/4	15-140404-64	3/8	3/4	15-141206-64	3/4	1-1/4	15-142012-64
	5/16	15-140504-64		7/8	15-141406-64		1-1/2	15-142412-64
	3/8	15-140604-64		1	15-141606-64		2	15-143212-64
	1/2	15-140804-64		1-1/4	15-142006-64		4	15-146412-64
	5/8	15-141004-64		1-1/2	15-142406-64	1	1	15-141616-64
	3/4	15-141204-64		2	15-143206-64		1-1/4	15-142016-64
	1	15-141604-64		4	15-146406-64		1-1/2	15-142416-64
	1-1/4	15-142004-64		1/2	15-140808-64		2	15-143216-64
	1-1/2	15-142404-64		5/8	15-141008-64	4	15-146416-64	
	2	15-143204-64		3/4	15-141208-64	1-1/4	1-1/4	15-142020-64
	4	15-146404-64		1	15-141608-64		1-1/2	15-142420-64
				1-1/4	15-142008-64		2	15-143232-64

*Contact Factory For Additional Sizes

FORCE GAUGE

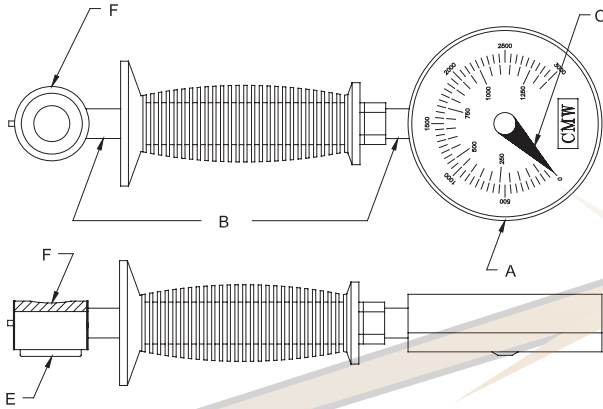

Gauge may be repaired or calibrated upon returning to CMW.

APPROXIMATE PRESSURE EXERTED BY AIR CYLINDER SIZE

Diameter Inches	Cylinder area Sq. In				
4	= 12.5	X	Welder	=	Electrode
5	= 19.5	X	Gauge	=	Force
6	= 28.0	X	Pressure	=	Pressure
8	= 50.0	X		=	

FEATURES AND SPECIFICATIONS

- Dependable, accurate, and fast
- 1% accuracy at 50% of scale reading
- Available in all popular ranges
- Standard and Deluxe gauges leave measurement after test.
- Certifiable

USE WITH

- Press type welding machines
- Rocker type welding machines

ORDERING INFORMATION AND DIMENSIONS

Part Number	Gauge Type	Sensor A	Connection B	Force Range C	Live D	Pad E	Rear Pad (Optional) F
LC2564-73	STANDARD	LC2	LC25	LC2564	LC2564-7	LC2564-73	-
LC2164-7391	DELUXE	LC2	LC21	LC2164	LC2164-7	LC2164-73	LC2164-7391
LC8568-73	DIGITAL	LC8	LC85	LC8568	LC8568-7	LC8568-73	-

CREATE GAUGE NUMBER FROM BUILD A FORCE GAUGE OPTIONS BELOW FOR GAUGE TO SUIT YOUR NEEDS

LC = Load Cell Sensor A	Connection B	Force Range C	Live D	Pad E	Rear Pad (Optional) F
1 = CUSHIONED SENSOR	1 = FLEX/SW 15° 11" OAL *	5 2 = 300	7	1 = FLAT POLY	9 1 = FLAT*
2 = 2.5 W/POINTER ^ *	2 = FLEX/SW 90° 15" OAL	5 6 = 600	7	2 = FLAT SS	
3 = 4.0 W/O POINTER	3 = FLEX/SW 180° 19" OAL	6 0 = 1000	7	3 = 3/4" LOCATOR POLY ^ *	
4 = 4.0 W/POINTER	4 =	6 4 = 2000 ^ *	7	4 = 3/4" LOCATOR SS	
5 = 4.5 PROCESS	5 = STANDARD 5" GRIP ^	6 6 = 3000	7	5 = 5" RADIUS POLY	
6 = 4.5 W/POINTER	6 = 6" O.A. W/O GRIP	6 8 = 5000 ¹	7	6 = 5" RADIUS SS	
7 = CUSTOM	7 = UNDER 7" O.A.	7 2 = 10000 ²	7	7 = THIN (LOW PROFILE)	
8 = DIGITAL	8 = SWIVEL ONLY	¹ MUST ADD SS LIVE PAD	7	8 = THIN (POLY)	
9 =	9 =	² SS LIVE PAD AND FLAT REAR PAD	7	9 = THIN (SS)	

^ = STOCK STANDARD GAUGE

* = STOCK DELUXE GAUGE

GCAP® ELECTRODE WELD SCHEDULE FOR GALVANIZED STEEL

Metal Thickness	.020	.030	.035	.040	.050	.060	.078	.093	.125
G-CAP	244	254	254	254	255	255	266	266	266
Pressure	300	400	500	650	750	800	1000	1200	1400
Squeeze cycle	25	25	25	25	30	30	30	35	35
Up-Slope cycle					4	4	4	4	5
Upslope					2.0	2.0	2.0	2.0	2.0
Kiloamps					to S.C.*	to S.C.*	to S.C.*	to S.C.*	to S.C.*
Weld cycle	6	8	9	10	7	8	10	12	10
Kiloamps	8.5	9.0	9.5	10.0	10.5	11.0	11.5	12.5	13.5
Cool cycle					1	1	1	1	1
Weld cycle					7	8	10	12	10
Kiloamps					10.5	11.0	11.5	12.5	13.5
Cool cycle									1
Weld cycle									10
Kiloamps									13.5
Hold cycle	3	4	4	5	5	10	10	15	20

* S.C. – Starting Weld Current

GCAP® LINEAR STEPPER

Total Weld Count	500	1,000	3,000	5,000	7,500	10,000	12,000
Total Amps Boost	600	1000	3000	5000	6800	8400	9200
Amps Boost Per Weld	1.20		.88			.60	

The above schedules and stepper is only meant to be a guide and will require adjustments to fit the application.

SPOT WELDING DATA

OPTIMUM CONDITIONS

SCHEDULES FOR SPOT WELDING LOW CARBON STEEL—SAE 1010

Thickness of Thinnest Outside Piece (Inches)	Electrode Diameters and Shape*			Recommended Minimum Standard Electrode Size	Weld Force (Lbs.)	Weld Cycles (60 Cycles per Sec.)	Hold Time (Cycles) Min.	Welding Current (Amps.) (Approx.)	Weld Shear Strength (For Steels Having Ultimate Tensile Strength of 90,000 psi and below) Minimum Strength (Lbs/Weld)	Diameter of Fused Zone (Approx.) Dw (Inches)	Minimum Weld Spacing S (Inches)	Minimum Contacting Overlap L (Inches)
	Flat Face		Radius Face									
	Maximum d (Inches)	Min. D (Inches)	Radius R (Inches)									
0.010	0.125	1/2	2	4RW 1MT	160	4	5	4,000	130	0.113	1/4	3/8
0.021	0.187	1/2	2	4RW 1MT	244	6	8	6,500	300	0.139	3/8	7/16
0.031	0.187	1/2	2	4RW 1MT	326	8	10	8,000	530	0.161	1/2	7/16
0.040	0.250	5/8	3	5RW 2MT	412	10	12	8,800	812	0.181	3/4	1/2
0.050	0.250	5/8	3	5RW 2MT	554	14	16	9,600	1,195	0.210	7/8	9/16
0.062	0.250	5/8	3	5RW 2MT	670	18	20	10,600	1,717	0.231	1	5/8
0.078	0.312	5/8	3	5RW 2MT	903	25	30	11,800	2,365	0.268	1-1/8	11/16
0.094	0.312	5/8	4	7RW 3MT	1,160	34	35	13,000	3,054	0.304	1-1/4	3/4
0.109	0.375	7/8	4	7RW 3MT	1,440	45	40	14,200	3,672	0.338	1-5/16	13/16
0.125	0.375	7/8	4	7RW 3MT	1,760	60	45	15,600	4,300	0.375	1-1/2	7/8
0.156	0.500	7/8	6	Male or Female Threaded	2,500	93	50	18,000	6,500	0.446	1-3/4	1
0.187	0.625	1	6	Male or Female Threaded	3,340	130	55	20,500	9,000	0.516	2	1-1/2
0.250	0.750	1-1/4	6	Male or Female Threaded	5,560	230	60	26,000	18,000	0.660	4	1-1/2

PERMISSIBLE SCHEDULE VARIATIONS FOR SPOT WELDING LOW CARBON STEEL

Low Carbon Steel Spot Welding Data Chart—Single Impulse Welding

DATA COMMON TO ALL CLASSES OF SPOT WELDS					WELDING SET-UP FOR BEST QUALITY—CLASS A WELDS					WELDING SET-UP FOR MEDIUM QUALITY—CLASS B WELDS					WELDING SET-UP FOR GOOD QUALITY—CLASS C WELDS				
Thickness of Each of the Two Work Pieces Inches	Electrode Diam. & Shape		Min. Weld Spacing (Note 4) Inches	Min. Contacting Overlap (Note 6) Inches	Weld Time (Note 7) Cycles	Electrode Force Pounds	Welding Current Amps.	Diam. of Fused Zone Inches	Average Tensile Shear Strength ±14% Pounds	Weld Time (Note 7) Cycles	Electrode Force Pounds	Welding Current Amps.	Diam. of Fused Zone Inches	Average Tensile Shear Strength ±17% Pounds	Weld Time (Note 7) Cycles	Electrode Force Pounds	Welding Current Amps.	Diam. of Fused Zone Inches	Average Tensile Shear Strength ±20% Pounds
	Min. D Inches	Max. d Inches																	
.010	1/2	1/8	1/4	3/8	4	200	4000	.13	235	5	130	3700	.12	200	15	65	3000	.11	160
.021	1/2	3/16	3/8	7/16	6	300	6100	.17	530	10	200	5100	.16	460	22	100	3800	.14	390
.031	1/2	3/16	1/2	7/16	8	400	8000	.21	980	15	275	6300	.20	850	29	135	4700	.18	790
.040	5/8	1/4	3/4	1/2	10	500	9200	.23	1305	21	360	7500	.22	1230	38	180	5600	.21	1180
.050	5/8	1/4	7/8	9/16	12	650	10300	.25	1820	24	410	8000	.23	1700	42	205	6100	.22	1600
.062	5/8	1/4	1	5/8	14	800	11600	.27	2350	29	500	9000	.26	2150	48	250	6800	.25	2050
.078	5/8	5/16	1-1/8	11/16	21	1100	13300	.31	3225	36	650	10400	.30	3025	58	325	7900	.28	2900
.094	5/8	5/16	1-1/4	3/4	25	1300	14700	.34	4100	44	790	11400	.33	3900	66	390	8800	.31	3750
.109	7/8	3/8	1-5/16	13/16	29	1600	16100	.37	5300	50	960	12200	.36	5050	72	480	9500	.35	4850
.125	7/8	3/8	1-1/2	7/8	30	1800	17500	.40	6900	60	1140	12900	.39	6500	78	570	10000	.37	6150

NOTES:

- Low Carbon Steel as hot rolled, pickled, and slightly oiled with an ultimate strength of 42,000 to 45,000 PSI Similar to SAE 1005—SAE 1010.
- Electrode Material is CMW® 3.
- Surface of steel is lightly oiled but free from grease, scale or dirt.
- Minimum weld spacing is that distance for which no increase in welding current is necessary to compensate for the shunted current effect in adjacent welds.
- Radius Face electrodes may be used:
0.010 to 0.031 — 2" Radius
0.031 to 0.078 — 3" Radius
0.078 to 0.125 — 4" Radius
-
- Weld time is indicated in cycles of 60 cycle frequency.
- Tensile shear strength values are based on recommended test sample sizes:
Direction of Force Thickness Width Length
.000" to .029" 5/8" 3"
.030" to .058" 1" 4"
.059" to .115" 1-1/2" 5"
.116" to .190" 2" 6"
- Tolerance for machining of electrode diameter "d" is ±.015" of specified dimension.
- Electrode force does not provide for force to press ill-fitting parts together.

PROJECTION WELDING DATA

DESIGN AND WELDING DATA FOR PROJECTION WELDING LOW CARBON STEELS

Thickness of Thinnest Outside Piece Inches	PROJECTION DESIGN		ELECTRODE DIAMETERS (d=2 x Projection Diameter)		Electrode Force Pounds	Weld Time (Cycles) 60 Cycles per Sec.	Hold Time (Cycles) Minimum	Welding Current Amperes (Approx.)	Diameter of Fused Zone Dw Inches	Minimum Shear Strength (Single Projection) Pounds Only (For Steels Having Strength of 100,000 psi and below)	Minimum Contacting Overlap L Inches = 2 DP MIN.
	Base Diameter of Projection Dp Inches	Height of Projection H Inches	Minimum d Inches	Minimum D Inches							
0.010	0.055	0.015	0.125	1/2	50	3	3	2,800	0.112	150	1/8
0.012	0.055	0.015	0.125	1/2	80	3	3	3,100	0.112	200	1/8
0.014	0.055	0.015	0.125	1/2	100	3	3	3,400	0.112	250	1/8
0.016	0.067	0.017	0.187	1/2	115	4	4	3,600	0.112	285	5/32
0.021	0.067	0.017	0.187	1/2	150	6	6	4,000	0.140	380	5/32
0.025	0.081	0.020	0.187	1/2	200	6	8	4,500	0.140	525	3/16
0.031	0.094	0.022	0.187	1/2	300	8	8	5,100	0.169	740	7/32
0.034	0.094	0.022	0.187	1/2	350	10	10	5,400	0.169	900	7/32
0.044	0.119	0.028	0.250	5/8	480	13	14	6,500	0.169	1,080	9/32
0.050	0.119	0.028	0.250	5/8	580	16	16	7,100	0.225	1,500	9/32
0.062	0.156	0.035	0.312	7/8	750	21	20	8,400	0.225	2,100	3/8
0.070	0.156	0.035	0.312	7/8	900	24	24	9,200	0.281	2,550	3/8
0.078	0.187	0.041	0.375	7/8	1,050	26	30	10,500	0.281	2,950	7/16
0.094	0.218	0.048	0.500	7/8	1,300	32	30	11,800	0.281	3,700	1/2
0.109	0.250	0.054	0.500	7/8	1,650	38	36	13,300	0.338	4,500	5/8
0.125	0.281	0.060	0.500	7/8	1,800	45	40	15,000	0.338	5,200	11/16
0.140	0.312	0.066	0.625	1	2,300	60	45	15,700	0.437	6,000	3/4
0.156	0.343	0.072	0.625	1	2,800	80	50	17,250	0.500	7,500	13/16
0.171	0.375	0.078	0.750	1	3,300	105	50	18,600	0.562	8,500	7/8
0.187	0.406	0.085	0.750	1	3,800	125	50	20,000	0.562	10,000	15/16
0.203	0.437	0.091	0.875	1-1/4	4,500	145	55	21,500	0.625	12,000	1
0.250	0.531	0.110	1.000	1-1/4	6,600	230	60	26,000	0.687	15,000	1-1/4


NOTES:

- Type of Steel—Low Carbon SAE 1010—0.15% Carbon Maximum.
- Material free of scale, oxide, paint, dirt, etc.
- Size of projection determined by thickness of thinnest piece and projection should be on thickest piece.
- Data is based on thickness of thinnest sheet for two thicknesses only. Maximum ratio between two thicknesses = 3 to 1.
- See TABLE BELOW for design of punch and die for making projections.
- Contacting overlap does not include any radii from forming.
- Projection should be located in center of overlap.
- Tolerance for Projection Dimensions:

Dimension	Thickness Up to 0.050"	Thickness Over 0.050"
Diameter "D"	±0.003"	±0.007"
Height "H"	±0.002"	±0.005"
9. Electrode Material:		
CMW®100	ELKONITE®TC-10	ELKONITE®10W3

From American Welding Society "Recommended Practices for Resistance Welding"

PUNCH AND DIE DESIGN FOR FORMING WELDING PROJECTIONS

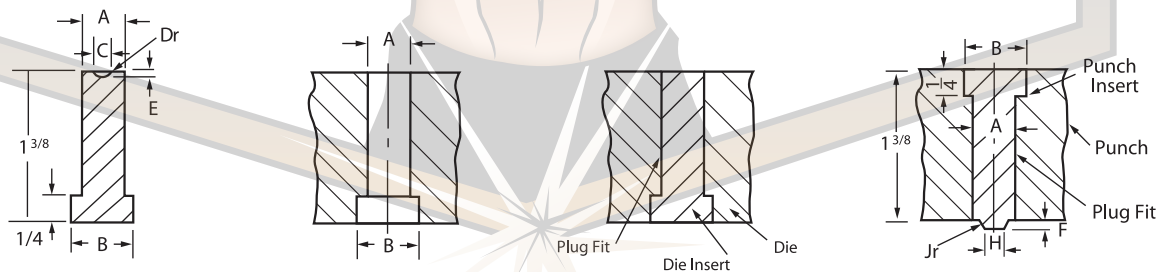

Mat Thickness	Pt. No.	A	B	±.002 C	Dr	±.001 E	±.001 F	±.001 H	Jr
0.010-0.015	1	3/8	9/16	.055	.033	.015	.015	.035	.005
0.016-0.021	2	3/8	9/16	.067	.042	.017	.020	.039	.005
.025	3	3/8	9/16	.081	.050	.020	.025	.044	.005
.031	4	3/8	9/16	.094	.062	.022	.030	.050	.005
.034	5	3/8	9/16	.094	.062	.022	.030	.050	.005
.044	6	3/8	9/16	.119	.078	.028	.035	.062	.005
.050	7	3/8	9/16	.119	.078	.028	.035	.062	.005
.062	8	3/8	9/16	.156	.105	.035	.043	.081	.005
.070	9	3/8	9/16	.156	.105	.035	.043	.081	.005
.078	10	3/8	9/16	.187	.128	.041	.055	.104	.010

Mat Thickness	Pt. No.	A	B	±.002 C	Dr	±.001 E	±.001 F	±.001 H	Jr
.094	11	1/2	11/16	.218	.148	.048	.065	.115	.010
.109	12	1/2	11/16	.250	.172	.054	.075	.137	1/64
.125	13	1/2	11/16	.281	.193	.060	.085	.154	1/64
.140	14	1/2	11/16	.312	.217	.066	.096	.172	1/64
.156	15	5/8	13/16	.343	.243	.072	.107	.191	1/64
.171	16	5/8	13/16	.375	.265	.078	.118	.210	1/64
.187	17	5/8	13/16	.406	.285	.085	.130	.229	1/64
.203	18	11/16	7/8	.437	.308	.091	.143	.240	.020
.250	19	13/16	1	.531	.375	.110	.175	.285	.025

Material: Tool Steel. Finish all over and harden to 65-68 Rockwell "C" scale. Note: All working surfaces of die unit must be polished.

From American Welding Society "Recommended Practices for Resistance Welding"

SCHEDULE FOR SPOT WELDING STAINLESS STEEL

THICKNESS "T" of THINNEST OUTSIDE PIECE (See Notes 1, 2, 3 and 4 Below)	ELECTRODE DIAMETER AND SHAPE (See Note 5)		ELECTRODE FORCE LB.	WELD TIME CYCLES (60 Per Sec.)	WELDING CURRENT (Approx.) AMPS		MINIMUM CONTACTING OVERLAP 	MINIMUM WELD SPACING (See Note 6 Below)	DIAMETER OF FUSED ZONE 	MINIMUM SHEAR STRENGTH LB.					
	D, IN., Min.	d, IN., Max.			Tensile Strength Below 150000 Psi	Tensile Strength 150000 Psi and Higher				IN.	IN.	IN. Approx.	Ultimate Tensile Strength of Metal		
													70000 Up to 90000 Psi	90000 Up to 150000 Psi	150000 Psi and Higher
	INCHES														
0.006	3/16	3/32	180	2	2000	2000	3/16	3/16	0.045	60	70	85			
0.008	3/16	3/32	200	3	2000	2000	3/16	3/16	0.065	150	170	210			
0.012	1/4	1/8	260	3	2100	2000	1/4	1/4	0.076	185	210	250			
0.014	1/4	1/8	300	4	2500	2200	1/4	1/4	0.082	240	250	320			
0.016	1/4	1/8	330	4	3000	2500	1/4	5/16	0.088	280	300	380			
0.018	1/4	1/8	380	4	3500	2800	1/4	5/16	0.093	320	360	470			
0.021	1/4	5/32	400	4	4000	3200	5/16	5/16	0.100	370	470	500			
0.025	3/8	5/32	520	5	5000	4100	3/8	7/16	0.120	500	600	680			
0.031	3/8	3/16	650	5	6000	4800	3/8	1/2	0.130	680	800	930			
0.034	3/8	3/16	750	6	7000	5500	7/16	9/16	0.150	800	920	1100			
0.040	3/8	3/16	900	6	7800	6300	7/16	5/8	0.160	1000	1270	1400			
0.044	3/8	3/16	1000	8	8700	7000	7/16	11/16	0.180	1200	1450	1700			
0.050	1/2	1/4	1200	8	9500	7500	1/2	3/4	0.190	1450	1700	2000			
0.056	1/2	1/4	1350	10	10300	8300	9/16	7/8	0.210	1700	2000	2450			
0.062	1/2	1/4	1500	10	11000	9000	5/8	1	0.220	1950	2400	2900			
0.070	5/8	1/4	1700	12	12300	10000	5/8	1-1/8	0.250	2400	2800	3550			
0.078	5/8	5/16	1900	14	14000	11000	11/16	1-1/4	0.275	2700	3400	4000			
0.094	5/8	5/16	2400	16	15700	12700	3/4	1-1/2	0.290	3550	4200	5300			
0.109	3/4	3/8	2800	18	17700	14000	13/16	1-1/2	0.290	4200	5000	6400			
0.125	3/4	3/8	3300	20	18000	15500	7/8	2	0.300	5000	6000	7600			

NOTES:

- Types of Steel—301, 302, 303, 304, 308, 309, 310, 316, 317, 321, 347 & 349
- Material should be free from scale, oxides, paint, grease and oil.
- Welding conditions determined by thickness of thinnest outside piece "T".
- Data for total thickness of pile-up not exceeding 4 "T". Maximum ratio between two thicknesses 3 to 1.
- Electrode Material, CMW® 3, CMW® 100, or ELKONITE® 10W3
- Minimum weld spacing is that spacing for two pieces for which no special precautions need be taken to compensate for shunted current effect of adjacent welds. For three pieces increase spacing 30 per cent.

SCHEDULE FOR SEAM WELDING STAINLESS STEEL

THICKNESS "T" OF THINNEST OUTSIDE PIECE (See Notes 1, 2, 3 and 4 Below)	ELECTRODE WIDTH AND SHAPE (See Note 5 Below)	ELECTRODE FORCE LB.	ON TIME CYCLES (60 Per Sec.)	OFF TIME FOR MAXIMUM SPEED (Pressure-Tight)		MAXIMUM WELD SPEED		WELDS PER INCH		WELDING CURRENT (Approx.) AMPS.	MINIMUM CONTACTING OVERLAP (See Note 6 Below)
				CYCLES		IN. PER MINUTE		PER INCH			
				2 "T"	4 "T"	2 "T"	4 "T"	2 "T"	4 "T"		
				INCHES	W, IN., Min.						
0.006	3/16	300	2	1	1	60	67	20	18	4000	1/4
0.008	3/16	350	2	2	2	67	56	18	16	4600	1/4
0.010	3/16	400	3	2	2	45	51	16	14	5000	1/4
0.012	1/4	450	3	2	2	48	55	15	13	5600	5/16
0.014	1/4	500	3	2	3	51	46	14	13	6200	5/16
0.016	1/4	600	3	2	3	51	50	14	12	6700	5/16
0.018	1/4	650	3	2	3	55	50	13	12	7300	5/16
0.021	1/4	700	3	2	3	55	55	13	11	7900	3/8
0.025	3/8	850	3	3	4	50	47	12	11	9200	7/16
0.031	3/8	1000	3	3	4	50	47	12	11	10600	7/16
0.040	3/8	1300	3	4	5	47	45	11	10	13000	1/2
0.050	1/2	1600	4	4	5	45	44	10	9	14200	5/8
0.062	1/2	1850	4	5	7	40	41	10	8	15100	5/8
0.070	5/8	2150	4	5	7	44	41	9	8	15900	11/16
0.078	5/8	2300	4	6	7	40	41	9	8	16500	11/16
0.094	5/8	2550	5	6	7	36	38	9	8	16600	3/4
0.109	3/4	2950	5	7	9	38	37	8	7	16800	13/16
0.125	3/4	3300	6	6	8	38	37	8	7	17000	7/8

NOTES:

- Types of Steel—301, 302, 303, 304, 308, 309, 310, 316, 317, 321, 347 & 349.
- Material should be free from scale, oxides, paint, grease and oil.
- Welding conditions determined by thickness of thinnest outside piece "T".
- Data for total thickness of pile-up not exceeding 4 "T". Maximum ratio between two thicknesses 3 to 1.
- Electrode material, CMW® 100
- For large assemblies minimum contacting overlap indicated should be increased 30 per cent.

From American Welding Society "Recommended Practices for Resistance Welding"

Spot welding galvanized low-carbon steel

Material Thickness	Electrode Diameter And Shape			Net Electrode Force	Welding Current (Approx.)	Weld Time	Weld Nugget Size	Minimum Tension-Shear Strength	Minimum Weld Spacing	Minimum Contacting Overlap	
	D	d	Oc								
Inches	In.	In.	Deg.	Lb.	Amps.	Cycles	In.	Lb.	Inches	Inches	
notes 1, 2, & 3	note 4										
	0.022	5/8	3/16	120	300	13000	8	0.15	550	5/8	5/8
	0.030	5/8	3/16	120	400	13000	10	0.16	1000	5/8	5/8
	0.036	5/8	1/4	120	500	13500	12	0.19	1180	3/4	5/8
	0.039	5/8	1/4	120	650	14000	13	0.21	1400	3/4	5/8
	0.052	5/8	1/4	120	725	14500	18	0.22	1700	7/8	11/16
	0.063	3/4	1/4	120	850	15500	22	0.24	2500	1-1/8	3/4
	0.078	3/4	5/16	120	1200	19000	24	0.28	3200	1-1/4	7/8
	0.093	3/4	3/8	120	1400	21000	30	0.34	4200	1-1/2	1
	0.108	7/8	3/8	120	1750	20000	37	0.40	5900	1-3/4	1-1/8
0.123	7/8	3/8	120	2000	20000	42	0.48	7200	2	1-1/8	

NOTES:

1. Material must be free from dirt, grease, paint etc. prior to welding, but may have light oil.
2. Two equal metal thicknesses of each gage.
3. Commercial coating weight is 1.25 oz. per square foot.
4. Electrode Material-RWMA Group A, Class 2. CMW® 3.
5. Water Cooling: 2 gallons per minute.

Projections should be larger in diameter for galvanized than for uncoated material.

Projection welding galvanized low-carbon steel

Material Thickness	Electrode Diameter And Shape			Net Electrode Force	Welding Current (Approx.)	Weld Time	Weld Nugget Size	Minimum Tension-Shear Strength	Projection Size	
	D	d							Diameter	Height
Inches	In.	In.	Lb.	Amps.	Cycles	In.	Lb.	In.	In.	
notes 1, 2, & 3	note 4							(For Single Projections Only)		
	0.039	5/8	3/8	250	10000	15	0.15	925	0.187	0.041
	0.063	5/8	7/16	400	11500	20	0.25	2050	0.218	0.048
	0.078	3/4	1/2	550	16000	25	0.25	2700	0.250	0.054
	0.093	3/4	1/2	750	16000	30	0.30	4300	0.250	0.054
0.108	7/8	1/2	950	22000	33	0.31	4900	0.250	0.054	

NOTES:

1. Material must be free from dirt, grease, paint etc. prior to welding, but may have light oil.
2. Two equal metal thicknesses of each gage.
3. Commercial coating weight is 1.25 oz. per square foot.
4. Electrode Material-RWMA Group A, Class 2. CMW® 3.
5. Pressure-tight joints require stripping the zinc coating prior to welding.
6. Nominal electrode diameter ranges between 8 to 10 inches.

From American Welding Society "Recommended Practices for Resistance Welding."

Seam welding galvanized low-carbon steel

Material Thickness	Electrode Width And Shape			Net Electrode Force	Welding Current (Approx.)	Weld Time		Welding Speed	Welds Per Inch	Minimum Contacting Overlap
	W	E				Heat Time	Cool Time			
Inches	In.	In.	Lb.	Amps.	Cycles	Cycles	In./Min.	W/In.	Inches	
notes 1, 2, & 3	note 4									
	0.015	3/8	1/4	900	15000	2	2	120	7.5	3/8
	0.036	1/2	1/4	1100	18000	4	2	60	10.0	1/2
	0.039	1/2	1/4	1200	19000	4	3	60	9.0	1/2
	0.052	1/2	1/4	1350	20000	5	1	90	7.0	9/16
	0.063	1/2	5/16	1500	19800	8	2	54	7.0	5/8
0.078	5/8	5/16	1850	23000	10	7	30	7.0	11/16	

RECOMMENDED ELECTRODE MATERIALS

The process of resistance welding makes it possible to join most metals, similar or dissimilar. Bonds of adequate strength are obtainable for an extremely wide range of applications. Selecting electrodes of the proper alloy is a most important consideration in producing good welds at the required speed. The chart below is a valuable guide to this selection.

The weldability of two materials as expressed in the following chart has been derived after careful laboratory study and field survey of many factors which influence the welding or resultant weld of the metals. The factors include:

1. Thermal and electrical conductivity

2. Metallurgical properties
3. Nature of resultant weld or alloy
4. Weld strength
5. Relative accuracy in control of welding conditions necessary

The weldability of metals as shown in the chart applies only when conventional spot welding methods are used on similar thicknesses of material. However, many metal combinations which are listed as having a "poor weldability" may be satisfactorily joined by using a special setup or procedure.

There is a CMW® Alloy for each specific welding application. Experienced CMW engineers will provide assistance with special problems.

Electrode Materials For SPOT WELDING Similar and Dissimilar Metals

	Tungsten Molybdenum	Magnesium	Nickel Alloys	Nickel	Stainless Steel	Chrome Steel	Cadmium Plate	Galvanized Steel Zn. Plate	Terne Plate	Tin Plate	Scaly Steel	C. R. Steel	Phosphor Bronze	Silicon Bronze	Nickel Silver	Cupro Nickel	Brass Yellow	Brass Red	Copper	Aluminum Alloys	Aluminum	C. P. Titanium	
Commercially Pure Titanium																							A II ⑩
Aluminum 2S-3S			C I E II	E II H I H II	E I D I D I D I							E II D II D II					D II E II H V C I C I						
Aluminum Alloys Duralumin 52S-17S-24S			C I E II	E II H I H II	E I D I D I D I							E II D II D II					D II E II H V C I C I						
Copper—Pure			H II H I E II	E II H I H II	H I H I H I							H II D II D II D II					D II E II H V C I C I						
Brass—Red 5-25% Zinc			H I D II D II	H II H I H II	H I H I H I							H II D II D II D II					D II E II H V C I C I						
Brass—Yellow 25-40% Zinc			E I D II D II	H II H I H II	H I H I H I							E II C II C II C II C II					D II E II H V C I C I						
Cupro-Nickel			D I C II C VI	E II E I E I E I	E I E I E I H							E II C II C II C II C II					D II E II H V C I C I						
Nickel Silver			D I C II C VI	E II E I E I E I	E I E I E I H							E II C II C II C II C II					D II E II H V C I C I						
Silicon Bronze			D I C II D II	E II E I E I E I	E I E I E I H							D II C II B II					D II E II H V C I C I						
Phosphor Bronze Grades A, C, & D			E I D II D II	E II E I E I E I	E I E I E I H							D II B II					D II E II H V C I C I						
C. R. Steel H. R. Steel—Clean			D II	D II D II B II	B II C II C I B							C I E I A II					D II E II H V C I C I						
Scaly H. R. Steel			H II	D II D II D II	D I D I D I							E I					D II E II H V C I C I						
Tin Plate			E II E I D I D II	C II C II D I C I D I	D I D I D I												D II E II H V C I C I						
Terne Plate			E II E I D I D II	C II C II C I C I	C I C I												D II E II H V C I C I						
Galvanized Steel Zinc Plate			E II E I D I D II	C II C II C I C I	C I C I												D II E II H V C I C I						
Cadmium Plate			E II E I D I D II	C II C II C I C I	C I C I												D II E II H V C I C I						
Chrome Plate			D II	D II D II B II	B II B II												D II E II H V C I C I						
Stainless Steel 18-8 Type			D II	D II D II A II	A II												D II E II H V C I C I						
Nickel Grade A			D II	C II B II	B II												D II E II H V C I C I						
Nickel Alloys Monel Nichrome (High Res.)			D II	B II	B II												D II E II H V C I C I						
Magnesium Alloys			D I	I 1 5													D II E II H V C I C I						
Molybdenum Tungsten			D II	I 2 5													D II E II H V C I C I						

WELDABILITY
As a basis for comparison cold rolled (mild) steel has been chosen and its weldability designated as "excellent."
A - Excellent E - Poor
B - Very Good H - Very Poor
C - Good K - Impractical
D - Fair

ELECTRODES
I - CMW® 28
II - CMW® 3
III - CMW® 100
IV - ELKONITE® 10W3
V - ELKONITE® 100M*
VI - ELKONITE® 1W3Δ or TC-5
*ELKONITE® 100 W may be substituted.
Δ ELKONITE® 10W3 or TC-10 may be interchanged.
○ Electrode materials in circles are second choice.

BLOCK INTERPRETATION

WELD-ABILITY	ELECTRODE AGAINST
ELECTRODE AGAINST	SPECIAL INFORMATION

ELECTRODES
I - CMW® 28
II - CMW® 3
III - CMW® 100
IV - ELKONITE® 10W3
V - ELKONITE® 100M*
VI - ELKONITE® 1W3Δ or TC-5
*ELKONITE® 100 W may be substituted.
Δ ELKONITE® 10W3 or TC-10 may be interchanged.
○ Electrode materials in circles are second choice.

SPECIAL INFORMATION
1. Good weld strength.
2. May be welded under special conditions.
3. Low weld strength.
4. No actual weld nugget occurs, a "stick" is obtained.
5. Welding conditions must be accurately controlled.
6. Keep electrode clean to prevent sticking to the work.
7. Good practice recommends cleaning steel before welding.
8. Use one flat tip to minimize distortion or discoloration.
9. Coating may dissolve in other metals or burn away.

RESISTANCE WELDING ELECTRODE MAINTENANCE



SOUTHERN COPPER & SUPPLY
COMPANY, INC.
800-289-2728

This Chart shows graphically the importance of Electrode maintenance. This is not only important from the quality of the weld, which is of first importance, also extra load added to the welding machine and equipment. Read the data on the chart, you can then draw your own conclusions.


YOU CAN'T AFFORD TO NEGLECT YOUR ELECTRODES!

Keep your Electrodes dressed for maximum production and quality welds.

A TIP DRESSER WILL PAY DIVIDENDS!

We can supply you with hand operated Tip Dressers or Pneumatic Power Driven Dressers. Design or type will depend on your production requirements. Pages 66 & 67.

RESISTANCE WELDING

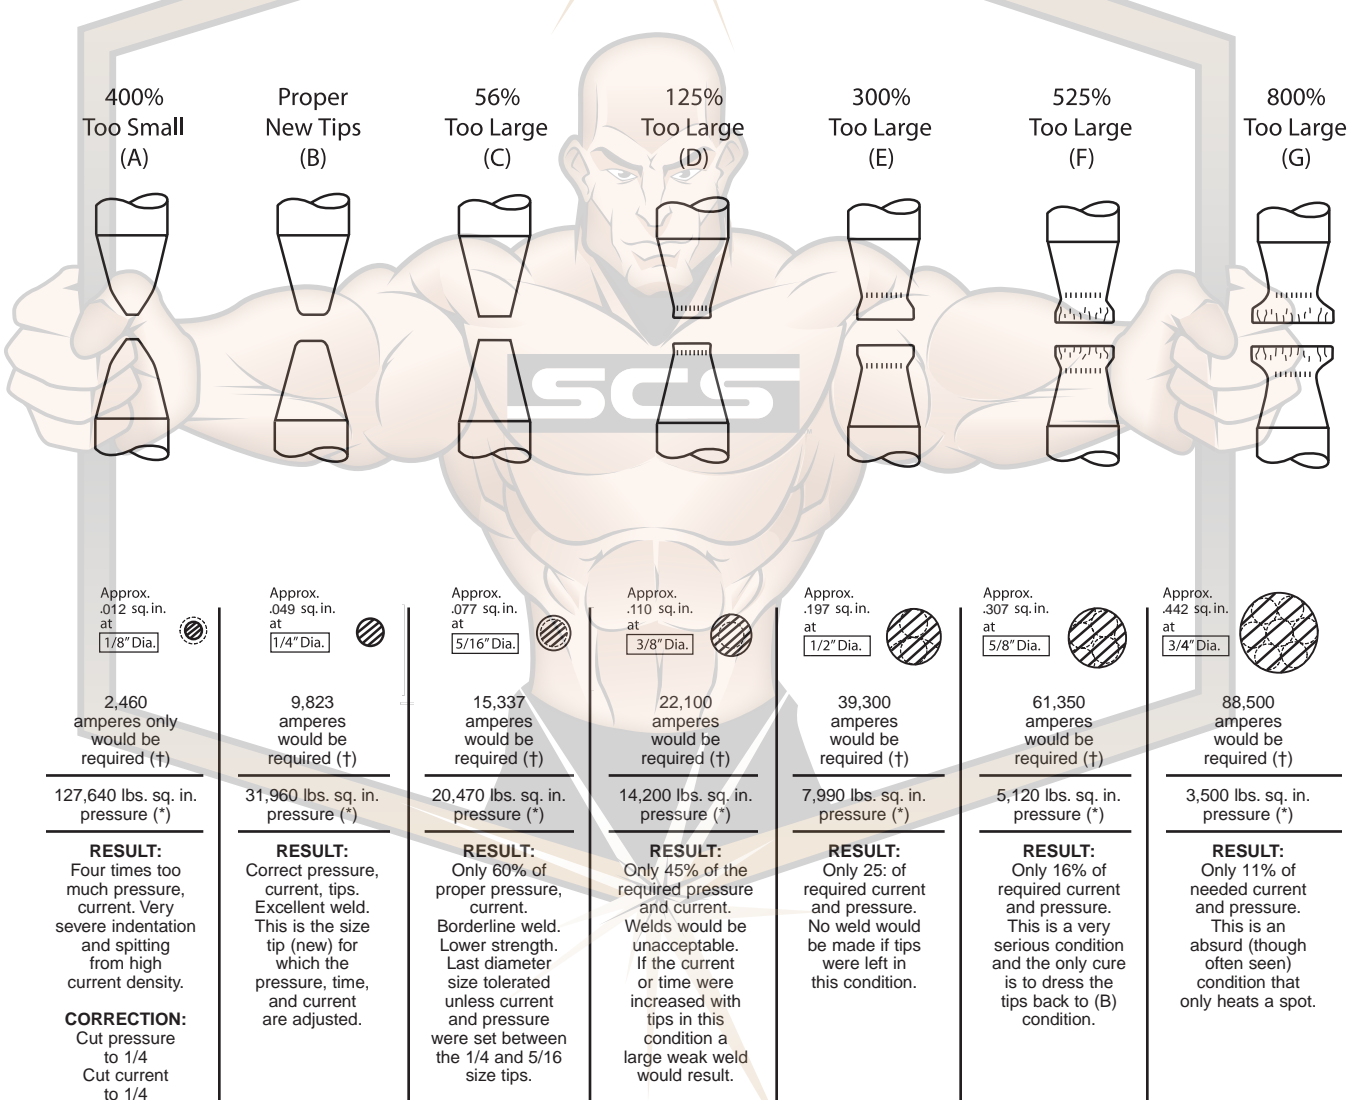

(†) Current density required for this gage to be 200,000 amps per sq. in. Setting is 9,900 amps for condition (B)

(*) Five inch diameter air cylinder A 80 lbs. air pressure—1570 lbs. on ram.

Reproduced by permission of McGraw-Hill Book Company, Inc.



Facility _____

Location _____

Contact _____ Phone _____ Fax _____ Date _____

Equipment --- Plant/Line # _____							
TYPE	Robot	Fixed Auto	Press	Hand	Online	Offline	Other (Specify)
GUN STYLE	C Gun	Pinch	Scissor	Other (Specify)	Comment		
CONDITION	New	Old	Good	Poor			
STEPPER CAPABILITY	Number of Steps	Linear	Non-linear	None			
UP-SLOPE CAPABILITY	Yes	No					
PULSE CAPABILITY	Yes	No					
NUMBER OF	Schedules per SCR	Transformers per SCR	Guns per Transformer	Transformer Taps	Transformer KVA		

Workpieces (Materials)							
POSITION	THICKNESS	CHECK ONE (per workpiece)					
		Bare Steel	Aluminized	Zn Electroplate	Galvanneal	Hot Dipped Galvanized	Organic
Outside							
Inside							
Inside							
Outside							
FIT-UP	Good	Poor	Comments				

ELECTRODES							
NOSE STYLE	A (Pointed)	B (Dome)	C (Flat)	D (Offset)	E (Truncated)	F (Radius)	Other (Specify)
	MATERIAL	Class 1	Class 2	Class 20 (DSC)	Other (Specify)		
TAPER STYLE	Female	Male	Comments				
ALIGNMENT	Good	Poor	Requires Backup				

DO'S AND DON'TS FOR RESISTANCE WELDING ELECTRODES

DO'S	DON'TS
<ol style="list-style-type: none"> 1. Use the proper electrode material for the job you are doing. 2. Use standard electrodes wherever possible. 3. Use the most suitable tip diameter for the thickness of stock being welded. 4. Use open sight drains to observe more readily the water flow through the holders. 5. Connect the water inlet hose to the proper holder inlet so that the water flows through the center cooling tube first. 6. Internally cool the spot welding tips with cool water flowing at a rate of at least 1/2 gallon per minute through each tip. 7. Be sure the internal water cooling tube of the holder projects into the tip water hole to within 1/4" of the tip hole bottom. 8. Adjust the internal water cooling tube of the holder to the proper height when changing to a different length tip. 9. Be sure top of adjustable water cooling tube in holders is cut at an angle so as to avoid jamming tip down and shutting water off. 10. Place a thin film of cup grease on the tip taper prior to inserting in the holder, to make it easier to remove. 11. Use ejector type holders for easy removal of tips and to avoid damage to tip tapers. 12. Keep the tip taper and holder taper clean, smooth and free of foreign deposits. 13. Dress spot welding electrodes frequently to maintain the quality of the welds. 14. Dress electrodes in a lathe to their original contour whenever possible. 15. Use a rawhide or rubber mallet for striking holder or tips in aligning operations. 16. Provide flood cooling on both sides of the seam welding wheel. 17. Use properly designed knurling wheels to maintain proper seam welding wheel shape. 	<ol style="list-style-type: none"> 1. Never use unidentified electrodes or electrode materials. 2. Avoid special, offset or irregular tips when the job can be done with a standard straight tip. 3. Don't use small tips on heavy gauge welding jobs or large tips on small work. 4. Don't forget to turn on the cooling water full force before starting to weld. 5. Never use water hose that will not fit the holder water connection nipples snugly. 6. Do not allow water connections to become leaky, clogged or broken. 7. Avoid using holders with leaking or deformed tapers. 8. Never use electrode holders that do not have an adjustable internal water cooling tube. 9. Do not permit adjustable water tube to be "frozen" by accumulation of deposits. A few drops of oil periodically will keep the tube free. 10. Do not allow electrodes to remain idle in tapered holder seats for extended periods. 11. Don't use pipe wrenches or similar tools in removing electrodes. 12. Avoid using white lead or similar compounds to seal a leaking taper. 13. Never permit a spot welding tip to mushroom enough to make dressing difficult. 14. Never dress electrodes with a coarse file. 15. Don't pound on the holder or tip with a steel hammer in aligning the welder arms. 16. Avoid the use of seam welder wheels too thin to stand the heat or pressure of your job. 17. Do not permit seam welding wheel to run off the corners of the work being welded.

