

Laminated Shunts

FURNISH THE FOLLOWING INFORMATION WHEN ORDERING:

| DIMENSIONS | |
|----------------------------|--------------------|
| OUTSIDE LENGTH | O.L. |
| WIDTH | W |
| THICKNESS (LESS CLIP) | T |
| HOLE DIAMETER | |
| TYPE | C,F,J |
| HOLE PATTERN | A,B,C,D |
| END STYLE | CLIP, SOLDER, ETC. |
| DIMENSIONS (IF APPLICABLE) | A,B,X,Y,Z |

Our shunts are custom designed to customer requirements and specifications – and are readily available in any hole pattern, or size. The secondary conductor strips are of high conductivity copper – shunts are normally supplied with their ends secured by riveted copper clips.

• TO ORDER YOUR SPECIALS USE THE CODING CHART ABOVE

TYPE "J"

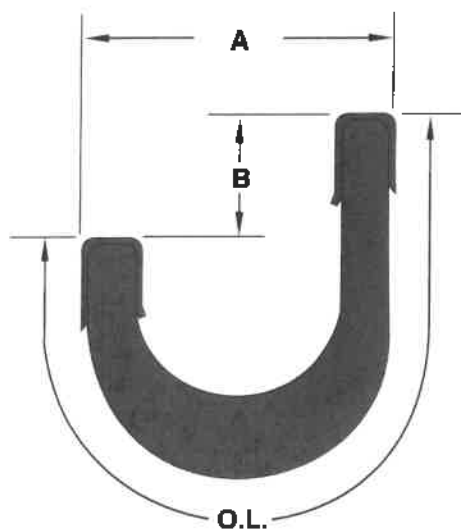


FIGURE 6-4

TYPE "C"

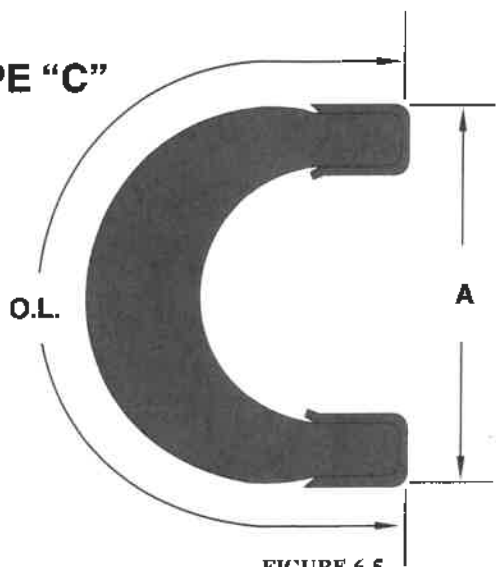


FIGURE 6-5

SAME AS WIDTH OF SHUNT
UNLESS OTHERWISE SPECIFIED

TYPE "F"

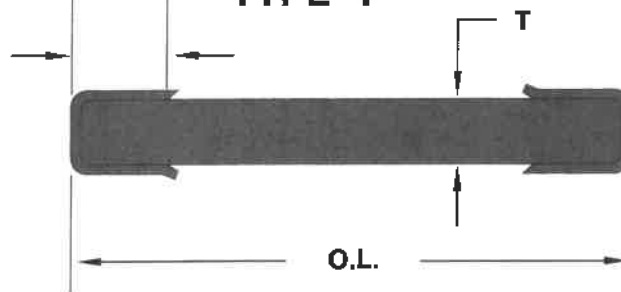


FIGURE 6-6

HOLE PATTERN

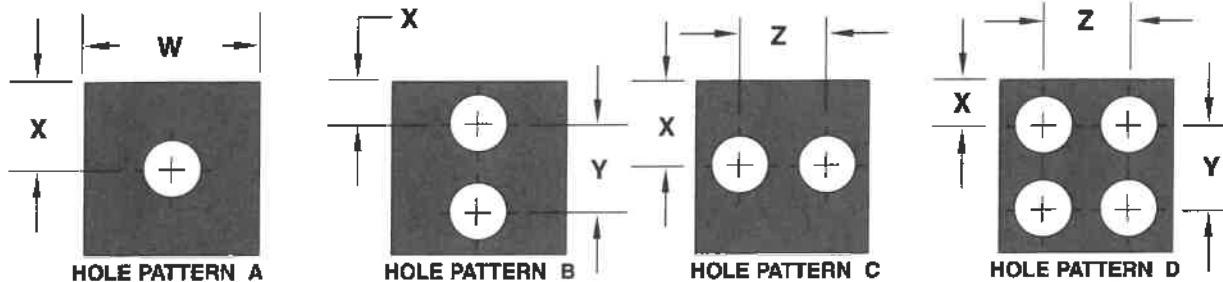


FIGURE 6-7

Air-Cooled Jumper Cables

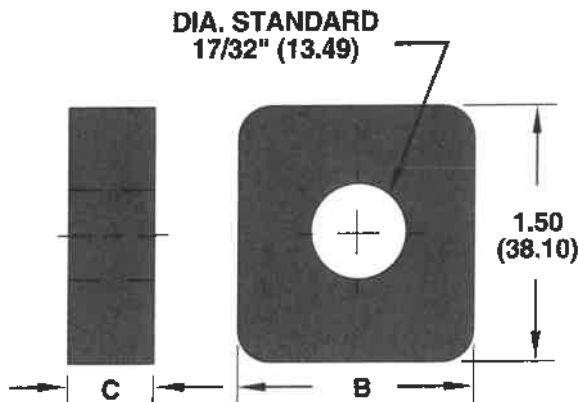


FIGURE 6-1

END STYLES

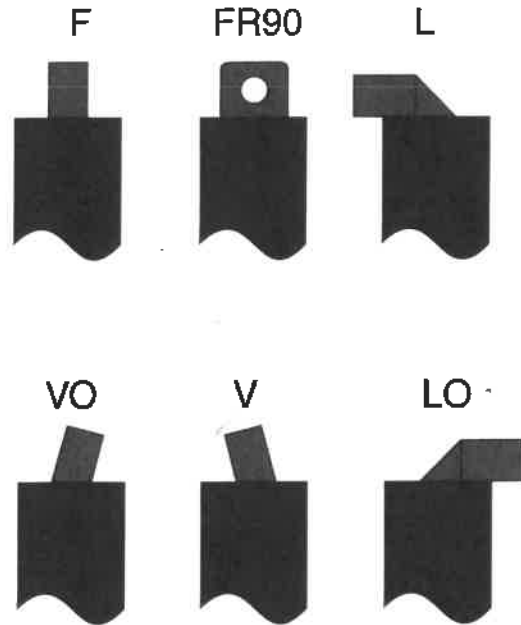


FIGURE 6-2

| TERMINAL DIMENSIONS | | | |
|---------------------|--------------|--------------|--------------|
| MCM | Jacket O.D. | B | C |
| 600 | 1.63 (41.28) | 1.38 (34.93) | .500 (12.70) |
| 750 | 1.75 (44.45) | 1.38 (34.93) | .600 (15.24) |
| 1000 | 2.00 (50.80) | 1.50 (38.10) | .700 (17.78) |
| 1200 | 2.12 (53.98) | 1.50 (38.10) | .820 (20.83) |
| 1500 | 2.25 (57.15) | 1.50 (38.10) | .990 (25.15) |

HOW TO ORDER CENTERLINE AIR-COOLED CABLES
Please Supply the Following Information:

| | TERMINALS | | M.C.M. | LENGTH |
|------|-----------|---------|--------|------------|
| | 1ST END | 2ND END | | |
| CLAC | F | F | 600 | 20 (508.0) |

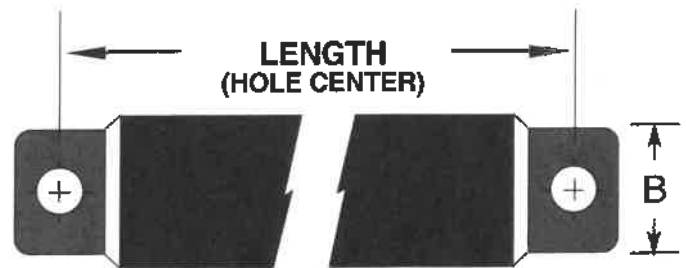


FIGURE 6-3

EXAMPLE:

CLAC - FF - 600 - 20

• WATER-COOLED JUMPER CABLES ALSO AVAILABLE UPON REQUEST

Dimensions Shown Are: inches (mm).